## AGD1 Dial Indicators

ASIMETO

- Graduation: Inch: 0.001" Metric: 0.01mm
- Dial face dia. 1.65"
- Jeweled bearings
- Lug Back



| Range | Dial Reading | Range per Rev | Stem Dia. | Code No. | Price $ |
|---|---|---|---|---|---|
| 0 - 0.25" | 0-100 | 0.1" | 3/8 | 7401061 | 62.33 |

## Dial Indicators

STM

- Reverse counter
- Stainless steel components
- Rotating bezel with clamp
- Lugback (1/4" hole)
- Interchangeable point
- Conforms to AGD 2 standards



| Travel Range | Dial Reading | Grad. | Dial Colour | Code No. | Price $ |
|---|---|---|---|---|---|
| 1/2" | 0-100" | 0.001" | White | 200718 | 35.18 |
| 1" | 0-100" | 0.001" | White | 200720 | 32.78 |
| 1" | 0-50" | 0.0005" | White | 200755 | 61.01 |
| 2" | 0-100" | 0.001" | White | 200725 | 78.09 |
| **Magnetic Back** | | | | | |
| For AGD2 series | | | | 200722 | 14.61 |

## Holding Bars

ASIMETO

- Scalloped design
- Black oxide coating for corrosion resistance



| Shank Dia. | Length | Code No. | Price $ |
|---|---|---|---|
| 1/4 x 1/2 | 4" | 7500213 | 37.99 |
| 9mm x 9mm | 50mm | 7500210 | 39.28 |
| 9mm x 9mm | 100mm | 7500212 | 38.63 |

## AGD2 Dial Indicators

ASIMETO

- Dial face dia. 2.20"
- Lug Back
- Easy to read dial face



7402265



7402267

| Range | Grad. | Dial Reading | Range per Rev. | Stem Dia. | Code No. | Price $ |
|---|---|---|---|---|---|---|
| **Inch** | | | | | | |
| 0-0.05" | 0.0001" | 0-50-0 | 0.01" | 3/8 | 7402013 | 92.83 |
| 0-0.05" | 0.0001" | 10-0 | 0.01" | 3/8 | 7402011 | 120.11 |
| 0-0.05" | 0.0001" | 0-5-0 | 0.01" | 3/8 | 7402015 | 200.11 |
| 0-0.25" | 0.0005" | 0-25-0 | 0.05" | 3/8 | 7402065 | 37.62 |
| 0-0.5" | 0.0005" | 0-50 | 0.05" | 3/8 | 7402125 | 37.62 |
| 0-1" | 0.0005" | 0-50 | 0.05" | 3/8 | 7402265 | 71.77 |
| 0-0.25" | 0.001" | 0-100 | 0.1" | 3/8 | 7402061 | 33.22 |
| 0-0.25" | 0.001" | 0-50-0 | 0.1" | 3/8 | 7402063 | 87.11 |
| 0-0.5" | 0.001" | 0-100 | 0.1" | 3/8 | 7402121 | 64.15 |
| 0-0.5" | 0.001" | 0-50-0 | 0.1" | 3/8 | 7402123 | 69.21 |
| 0-1" | 0.001" | 0-100 | 0.1" | 3/8 | 7402261 | 59.78 |
| 0-1" | 0.001" | 0-50-0 | 0.1" | 3/8 | 7402263 | 69.44 |
| 0-2" | 0.001" | 0-100 | 0.1" | 3/8 | 7402511 | 142.40 |
| **Metric** | | | | | | |
| 0-10mm | 0.01mm | 0-100 | 1mm | 3/8 | 7402101 | 117.40 |
| 0-25mm | 0.01mm | 0-50-0 | 1mm | 3/8 | 7402253 | 238.64 |
| **IP54 Water Proof** | | | | | | |
| 0-0.4" | 0.001" | 0-100 | 0.1" | 3/8 | 7402267 | 83.75 |
| 0-0.4" | 0.0005" | 0-50 | 0.05" | 3/8 | 7402269 | 89.81 |

## Test Indicators and Sets

STM

- Available in bezel or dial
- Contact point adjustable through 230°
- Fully jeweled movement
- Extremely light contact pressure
- Clear, easy to read, white face
- Dovetails on top and back for all-around positioning
- Sets include 5/32" and 3/8" mounting shanks and 3/8" bar




| Dial Dia. (in.) | Grad. (in.) | Range (in.) | Reading (in.) | Point Length (in.) | Code No. | Price $ |
|---|---|---|---|---|---|---|
| 1.250" | 0.0005" | 0.030" | 0-15-0 | 0.700" | 200730 | 89.68 |


## Test Indicators


ASIMETO

- Jeweled bearings
- Inch units come with 3/8 & 8mm dovetail stems
- Easy to read yellow face
- 32mm and 40mm face diameters available



Vertical

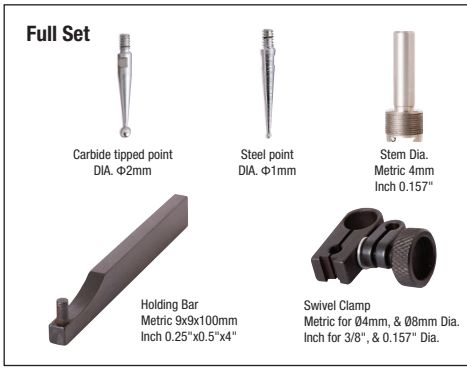

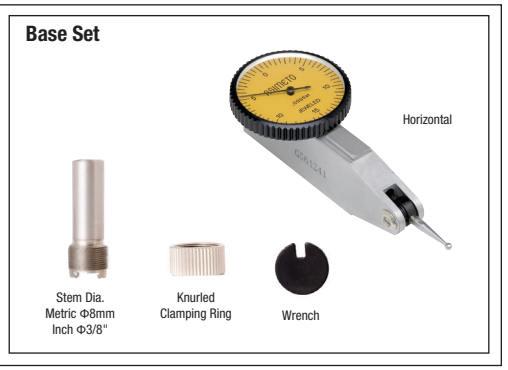
| Grad. | Range | Dial Reading | Accuracy | Type | Code No. | Price $ |
|---|---|---|---|---|---|---|
| **Inch** | | | | | | |
| 0.0001" | 0.008" | 0-4-0 | ±0.0001" | Horizontal | 7501783 | 109.42 |
| 0.0001" | 0.008" | 0-4-0 | ±0.0001" | Vertical | 7501785 | 104.12 |
| 0.0005" | 0.03" | 0-15-0 | ±0.0005" | Horizontal | 7501733 | 163.54 |
| 0.0005" | 0.03" | 0-15-0 | ±0.0005" | Vertical | 7501735 | 131.58 |
| 0.0005" | 0.03" | 0-15-0 | ±0.0005" | Horizontal/Long Point (1.25") | 7501736 | 202.96 |
| **Inch Sets** | | | | | | |
| 0.0001" | 0.008" | 0-4-0 | ±0.0001" | Horizontal | 7501787 | 204.43 |
| 0.0005" | 0.03" | 0-15-0 | ±0.0005" | Horizontal | 7501738 | 161.22 |