BII 2" DIAL PRESSURE GAUGE CENTER BACK MOUNT

Application:

General purpose gauge, for potable water pumps & systems, these gauges are suitable for compressors, hydraulic presses, machinery, pneumatic equipment and motors, for most commercial air, water and steam services. To be used with fluid medium which does not clog connection or corrode copper alloy.
Not for use with oxygen, natural gas or propane.


NO LEAD <0.25% Pb by weighted avg.

Third Party Certified to NSF / ANSI 372

Certification:

NSF/ANSI Standard 372 Certified (No Lead Series Only)



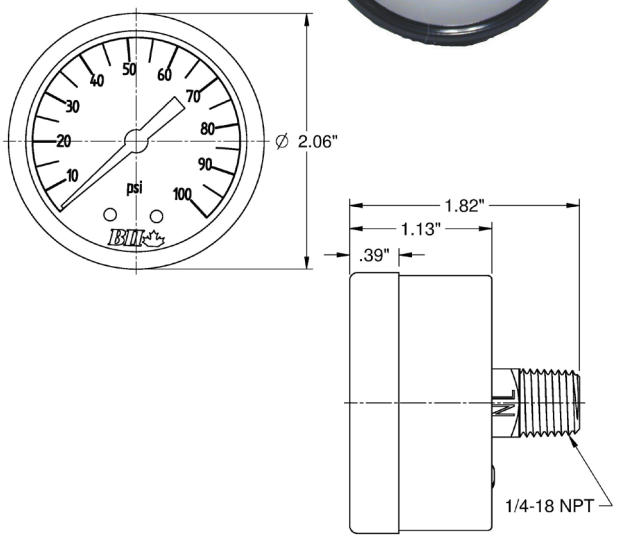

GAUGE SPECIFICATIONS	
Standard	ASME B40.1
Dial	2" (51mm) white aluminum dial
Case	Steel or ABS
Lens	Acrylic
Ring (Bezel)	N/A
Connection	Brass / No Lead Brass (NL)
Bourdon Tube	Copper alloy
Fill Liquid	N/A
Pointer	Aluminum (Anodized Black)
Welding	Tin Solder
Working Pressure	Maximum 75% of Full Scale Value (F.S.V.)
Ambient Op. Temp.	-40°F to 140°F (-40°C to 60°C)
Media Op. Temp.	Max. 140°F (60°C)
Accuracy	3% - 2% - 3% Grade B
Enclosure Rating	General Purpose

DIMENSIONS

Part No.	No Lead Part No.	Connection	Range PSI	Increments	Weight grams
Steel Case					
N/A	PGCBM-1-30NL	1/4" MPT	0-30	0.5	95
PGCBM-1-60	PGCBM-1-60NL	1/4" MPT	0-60	1	95
N/A	PGCBM-0-100NL	1/8" MPT	0-100	1	90
PGCBM-1-100	PGCBM-1-100NL	1/4" MPT	0-100	1	95
PGCBM-1-160	PGCBM-1-160NL	1/4" MPT	0-160	2	95
PGCBM-1-200	PGCBM-1-200NL	1/4" MPT	0-200	2	95
ABS Case					
PGPCBM-1-60	PGPCBM-1-60NL	1/4" MPT	0-60	1	65

BOSHART INDUSTRIES
COMMITTED TO EXCELLENCE SINCE 1955

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 519-595-4444 Fax: 519-595-4380 Toll Free: 800-561-3164

www.boshart.com

© 2018 Boshart Industries Inc. All Rights Reserved.