# NH Mobile Ladder Stands* – No Handrail

- 1" x 16 ga. round tube construction
- 15" platform depth
- 3" spring-loaded non-marking casters
- 24"x 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 26" overall width
- 400 lb. capacity
- Durable blue powder coat finish

OPTIONS:
~ Extended platforms
*Please call for details.*


3NH


5NH

| Part Number | No. of Steps | Platform Height (in.) | Base Size (in.) LxW | Weight (lbs.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|
| **1NH** | 1 | 9 | 18x28 | 25 | 18x28x10 |
| ♦**2NH** | 2 | 18 | 24x28 | 30 | 24x28x19 |
| ♦**3NH** | 3 | 27 | 31x28 | 40 | 31x28x28 |
| **4NH** | 4 | 36 | 37x28 | 55 | 37x28x37 |
| **5NH** | 5 | 45 | 43x28 | 65 | 43x28x46 |

**Parts for all NH ladders**



♦**CAS-3TPR-SET** 3" swivel spring-loaded caster, c/w spring & cotter pin

♦**RP2534:** Rubber Pad assembly



# NH-SS Stainless Steel Mobile Ladder Stands* – No Handrail

- 1" stainless steel round tube construction
- Clean room finish
- 304 #4 brushed finish
- 24" x 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 3" spring-loaded non-marking casters
- 15" platform depth
- All components except casters and springs are fabricated from high quality stainless steel
- 400 lbs. capacity
- Ships all welded

OPTIONS:
~ Extended platforms
~ 316 #4 brushed finish
Please call for details.

| Part Number | No. of Steps | Platform Height (in.) | Base Size (in.) LxW | Weight (lbs.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|
| **1NH-SS** | 1 | 9 | 18x28 | 30 | 18x28x10 |
| **2NH-SS** | 2 | 18 | 24x28 | 40 | 24x28x19 |
| **3NH-SS** | 3 | 27 | 31x28 | 53 | 31x28x28 |
| **4NH-SS** | 4 | 36 | 37x28 | 62 | 37x28x37 |
| **5NH-SS** | 5 | 45 | 43x28 | 95 | 43x28x46 |

# ANH Aluminum Mobile Ladder Stands* – No Handrail

- 1" aluminum round tube construction
- 24" x 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 3" spring-loaded non-marking casters
- 15" platform depth
- 300 lbs. capacity
- Ships all welded
- Durable blue powder coat finish

| Part Number | No. of Steps | Platform Height (in.) | Base Size (in.) LxW | Weight (lbs.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|
| **1ANH** | 1 | 9 | 18x28 | 14 | 18x28x10 |
| **2ANH** | 2 | 18 | 24x28 | 24 | 24x28x19 |
| **3ANH** | 3 | 27 | 31x28 | 32 | 31x28x28 |
| **4ANH** | 4 | 36 | 37x28 | 37 | 37x28x37 |
| **5ANH** | 5 | 45 | 43x28 | 57 | 43x28x46 |

* • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
• Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
• Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
• Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:
• Ladder Assembly Instructions and User Guide
• Schematic Drawings with dimensions and isometric view
• Canway Certification Statement covering Mobile Ladder Stands

♦ Stock item

# SNH Safety Angle Mobile Ladder Stands* – No Handrail

- 50° safety angle
- 1" x 16 ga. round tube construction
- 19" platform depth
- 3" spring-loaded non-marking casters
- 24" x 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 26" overall width
- 400 lb. capacity
- Durable blue powder coat finish




2SNH



3SNH

**Diamond Channel Grating**



**DCG-H** 7-1/2" deep tread standard
**DCG-SH** 9-1/2" deep tread for safety ladders


| Part Number | No. of Steps | Platform Height (in.) | Base Size (in.) | Weight (lbs.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|
| **2SNH** | 2 | 20 | 31x28 | 47 | 31x28x21 |
| **3SNH** | 3 | 30 | 41x28 | 57 | 41x28x31 |
| **4SNH** | 4 | 40 | 50x28 | 67 | 50x28x41 |

**Parts for all SNH ladders**



♦**CAS-3TPR-SET** 3" swivel spring-loaded caster, c/w spring & cotter pin

♦**RP2534:** Rubber Pad assembly



# SNH-SS Stainless Steel Safety Angle Mobile Ladder Stands* – No Handrail

- 1" Type 304 stainless steel round tube construction
- Clean room finish
- 304 #4 brushed finish
- 24" x 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 3" spring-loaded non-marking casters
- 19" platform depth
- 400 lbs. capacity
- All components except casters and springs are fabricated from high quality stainless steel
- Ships all welded

| Part Number | No. of Steps | Platform Height (in.) | Base Size (in.) | Weight (lbs.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|
| **2SNH-SS** | 2 | 20 | 31x28 | 47 | 31x28x21 |
| **3SNH-SS** | 3 | 30 | 41x28 | 57 | 41x28x31 |
| **4SNH-SS** | 4 | 40 | 50x28 | 67 | 50x28x41 |

**Shipping Details:**
1-5 step ladders ship fully assembled.
6 step and larger ladders ship knocked down.
Shipping 6 step and larger ladders fully assembled is only available on select sizes. Extra freight charges will be incurred.

- H Mobile Ladder Stands: 6H – 14H
- SH Safety Angle Mobile Ladder Stands: 6SH – 8SH
- HR RIP Mobile Ladder Stands: 6HR – 14HR
- SHR RIP Mobile Ladder Stands: 6SHR – 9SHR

# ASNH Aluminum Safety Angle Mobile Ladder Stands* – No Handrail

- 1" aluminum round tube construction
- 24" x 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 3" spring-loaded non-marking casters
- 19" platform depth
- 300 lbs. capacity
- Ships all welded
- Durable blue powder coat finish

| Part Number | No. of Steps | Platform Height (in.) | Base Size (in.) | Weight (lbs.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|
| **2ASNH** | 2 | 20 | 31x28 | 28 | 31x28x21 |
| **3ASNH** | 3 | 30 | 41x28 | 34 | 41x28x31 |
| **4ASNH** | 4 | 40 | 50x28 | 40 | 50x28x41 |

* • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
• Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
• Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
• Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:
• Ladder Assembly Instructions and User Guide
• Schematic Drawings with dimensions and isometric view
• Canway Certification Statement covering Mobile Ladder Stands

♦Stock item

# H Mobile Ladder Stands* – With Handrails








- 1" x 16 ga. round tube construction
- 42" high handrail
- 15" platform depth
- 5"x1-1/4" RSX rubber swivel casters on trip step mechanism
- 3" spring-loaded casters on 1H-3H
- Positive floor locking trip step mechanism on 4H and up
- 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 400 lb. capacity
- 1H – 5H ship fully assembled; 6H – 20H ship knocked down
- Durable blue powder coat finish

OPTIONS:
~ Front or side walk-through
~ Fold-down handrail
~ Extended platform
*Please call for details.*

**Diamond Channel Grating**



**DCG-H** 7-1/2" deep tread standard
**DCG-SH** 9-1/2" deep tread for safety ladders

## Wheel Description

For all wheel & caster info & details, please see Section 13.



♦ **6PO**
6" polyolefin wheel (4H-7H ladders)



♦ **8PO**
8" polyolefin wheel (8H-20H ladders)

**Parts for 1H – 3H ladders**



♦ **CAS-3TPR-SET** 3" swivel spring-loaded caster, c/w spring & cotter pin


**Parts for 4H – 20H ladders**




♦ **CAS-5RSX-TS** 5RSX swivel c/w threaded stem

**Parts for H ladders**

♦ **RP2534:** Rubber Pad assembly



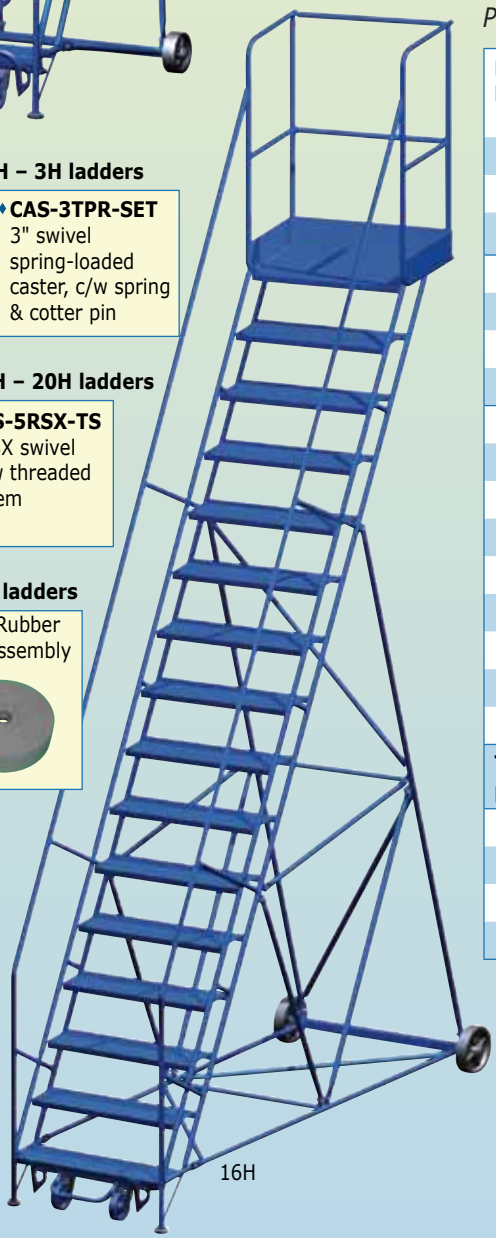


| Part Number | No. of Steps | Platform Height (in.) | Step Width (in.) | Base Size (in.) | Weight (lbs.) | Wheel/ Caster Type & Size (in.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|---|
| **1H** | 1 | 9 | 24 | 18x28 | 35 | 3" spring-loaded non-marking casters | 18x28x51 |
| **2H** | 2 | 18 | 24 | 24x28 | 50 | | 24x28x60 |
| ♦ **3H** | 3 | 27 | 24 | 31x28 | 60 | | 31x28x69 |
| ♦ **4H** | 4 | 36 | 24 | 37x34 | 85 | 5" rubber casters 6" polyolefin wheels | 37x34x78 |
| ♦ **5H** | 5 | 45 | 24 | 43x34 | 95 | | 43x34x87 |
| ♦ **6H** | 6 | 54 | 24 | 48x34 | 115 | | 102x34x39 |
| **7H** | 7 | 63 | 24 | 53x34 | 125 | | 110x34x39 |
| ♦ **8H** | 8 | 72 | 28 | 59x38 | 150 | 5" rubber casters 8" polyolefin wheels | 124x38x39 |
| **9H** | 9 | 81 | 28 | 65x38 | 170 | | 136x38x39 |
| ♦ **10H** | 10 | 90 | 28 | 70x38 | 175 | | 144x38x39 |
| **11H** | 11 | 99 | 28 | 75x38 | 180 | | 155x38x39 |
| ♦ **12H** | 12 | 108 | 28 | 81x38 | 200 | | 166x38x39 |
| **13H** | 13 | 117 | 28 | 86x38 | 215 | | 177x38x39 |
| **14H** | 14 | 126 | 28 | 89x38 | 250 | | 187x38x39 |
| **15H** | 15 | 135 | 28 | 94x38 | 260 | | 197x38x39 |
| **16H** | 16 | 144 | 28 | 100x38 | 270 | | 208x38x39 |
| **The following ladders are special order and cannot be returned – please check measurements carefully.** | | | | | | | |
| **17H** | 17 | 153 | 28 | 106x46 | 315 | 5" rubber casters 8" polyolefin wheels | 219x46x39 |
| **18H** | 18 | 162 | 28 | 111x46 | 325 | | 229x46x39 |
| **19H** | 19 | 171 | 28 | 117x46 | 345 | | 240x46x39 |
| **20H** | 20 | 180 | 28 | 122x46 | 355 | | 249x46x39 |

* • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
• Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
• Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
• Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:
• Ladder Assembly Instructions and User Guide
• Schematic Drawings with dimensions and isometric view
• Canway Certification Statement covering Mobile Ladder Stands

♦ Stock item

# H-SS Stainless Steel Mobile Ladder Stands* – With Handrails




| Part Number | No. of Steps | Platform Height (in.) | Step Width (in.) | Base Size (in.) | Weight (lbs.) | Wheel/Caster Type & Size (in.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|---|
| 1H-SS | 1 | 9 | 24 | 18x28 | 35 | 3" spring-loaded non-marking casters | 18x28x51 |
| 2H-SS | 2 | 18 | 24 | 24x28 | 50 | | 24x28x60 |
| 3H-SS | 3 | 27 | 24 | 31x28 | 60 | | 31x28x69 |
| 4H-SS | 4 | 36 | 24 | 37x34 | 85 | 5" rubber casters 6" polyolefin wheels | 37x34x78 |
| 5H-SS | 5 | 45 | 24 | 43x34 | 95 | | 43x34x87 |
| 6H-SS | 6 | 54 | 24 | 48x34 | 115 | | 102x34x39 |
| 7H-SS | 7 | 63 | 24 | 53x34 | 125 | | 110x34x39 |
| 8H-SS | 8 | 72 | 28 | 59x38 | 150 | 5" rubber casters 8" polyolefin wheels | 124x38x39 |
| 9H-SS | 9 | 81 | 28 | 65x38 | 170 | | 136x38x39 |
| 10H-SS | 10 | 90 | 28 | 70x38 | 175 | | 144x38x39 |
| 11H-SS | 11 | 99 | 28 | 75x38 | 180 | | 155x38x39 |
| 12H-SS | 12 | 108 | 28 | 81x38 | 200 | | 166x38x39 |
| 13H-SS | 13 | 117 | 28 | 86x38 | 215 | | 177x38x39 |
| 14H-SS | 14 | 126 | 28 | 89x38 | 250 | | 187x38x39 |
| 15H-SS | 15 | 135 | 28 | 94x38 | 260 | | 197x38x39 |
| 16H-SS | 16 | 144 | 28 | 100x38 | 270 | | 208x38x39 |

**Wheel Description**

For all wheel & caster info & details, please see Section 13.



♦ **6PO or ♦8PO**
6" or 8" polyolefin wheel

**Parts for 1H – 3H ladders**



♦ **CAS-3TPR-SET**
3" swivel, spring-loaded caster, c/w spring & cotter pin


**Parts for 4H – 16H ladders**



♦ **CAS-5RSX-TS**
5RSX swivel c/w threaded stem

**Parts for H ladders**

♦ **RP2534:** Rubber Pad assembly



- 1" stainless steel round tube construction
- Clean room finish
- 304 #4 brushed finish
- 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- Positive floor locking trip step mechanism on 4H and up
- 15" platform depth
- 1H-SS – 5H-SS ship fully assembled; 6H-SS – 16H-SS ship knocked down
- 400 lbs. capacity
- All components except casters and springs are fabricated from high quality stainless steel

OPTIONS:
~ Front or side walk-through (comes with safety chains or gate)
~ Extended platform
~ Fold-down handrail
*Please call for details.*

# AH Aluminum Mobile Ladder Stands* – With Handrails

- 1" aluminum round tube construction
- 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- Positive floor locking trip step mechanism on 4H and up
- 15" platform depth
- 300 lbs. capacity
- 1AH – 5AH ship fully assembled; 6AH – 16AH ship knocked down
- Durable blue powder coat finish

OPTIONS:
~ Front or side walk-through (comes with safety chains or gate)
~ Extended platform.
~ Fold-down handrail
~ 316 #4 brushed finish *Please call for details.*

| Part Number | No. of Steps | Platform Height (in.) | Step Width (in.) | Base Size (in.) | Weight (lbs.) | Wheel/Caster Type & Size (in.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|---|
| 1AH | 1 | 9 | 24 | 18x28 | 21 | 3" spring-loaded non-marking casters | 18x28x51 |
| 2AH | 2 | 18 | 24 | 24x28 | 30 | | 24x28x60 |
| 3AH | 3 | 27 | 24 | 31x28 | 36 | | 31x28x69 |
| 4AH | 4 | 36 | 24 | 37x34 | 51 | 5" rubber casters 6" polyolefin wheels | 37x34x78 |
| 5AH | 5 | 45 | 24 | 43x34 | 57 | | 43x34x87 |
| 6AH | 6 | 54 | 24 | 48x34 | 69 | | 102x34x39 |
| 7AH | 7 | 63 | 24 | 53x34 | 75 | | 110x34x39 |
| 8AH | 8 | 72 | 28 | 59x38 | 90 | 5" rubber casters 8" polyolefin wheels | 124x38x39 |
| 9AH | 9 | 81 | 28 | 65x38 | 102 | | 136x38x39 |
| 10AH | 10 | 90 | 28 | 70x38 | 105 | | 144x38x39 |
| 11AH | 11 | 99 | 28 | 75x38 | 108 | | 155x38x39 |
| 12AH | 12 | 108 | 28 | 81x38 | 120 | | 166x38x39 |
| 13AH | 13 | 117 | 28 | 86x38 | 129 | | 177x38x39 |
| 14AH | 14 | 126 | 28 | 89x38 | 150 | | 187x38x39 |
| 15AH | 15 | 135 | 28 | 94x38 | 156 | | 197x38x39 |
| 16AH | 16 | 144 | 28 | 100x38 | 160 | | 208x38x39 |

* • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
• Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
• Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
• Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum
See website for more information.





♦Stock item

# SH Safety Angle Mobile Ladder Stands*


6SH


3SH

- 50° safety angle ladder allows user to face forward while descending
- 1" x 16 ga. round tube construction
- 42" high handrail
- 19" platform depth
- Positive floor locking trip step mechanism
- 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 400 lb. capacity
- 2SH – 5H ship fully assembled; 6SH – 16SH ship knocked down
- Durable blue powder coat finish


OPTIONS:
~ Front or side walk-through (comes with safety chains or gate)
~ Extended platform
~ Fold-down handrail
*Please call for details.*

**Wheel Description**
For all wheel & caster info & details, please see Section 13.


♦ **6PO**
6" polyolefin wheel (4H-7H ladders)


♦ **8PO**
8" polyolefin wheel (8H-20H ladders)

**Diamond Channel Grating**


**DCG-H** 7-1/2" deep tread standard
**DCG-SH** 9-1/2" deep tread for safety ladders


**Parts for 2SH – 3SH ladders**


**CAS-3TPR-SET** 3" swivel spring-loaded caster, c/w spring & cotter pin

**4SH – 16SH ladders**


♦ **CAS-5RSX-TS** 5RSX swivel c/w threaded stem

**Parts for SH ladders**


♦ **RP2534:** Rubber Pad assembly

| Part Number | No. of Steps | Platform Height (in.) | Step Width (in.) | Base Size (in.) | Weight (lbs.) | Wheel/Caster Type & Size (in.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|---|
| **2SH** | 2 | 20 | 24 | 31x28 | 50 | 3" spring-loaded non-marking casters | 31x28x62 |
| **3SH** | 3 | 30 | 24 | 41x28 | 65 | | 41x28x72 |
| **4SH** | 4 | 40 | 24 | 53x34 | 105 | 5" rubber casters 6" polyolefin wheels | 53X34x82 |
| **5SH** | 5 | 50 | 24 | 59x34 | 120 | | 59X34x92 |
| **6SH** | 6 | 60 | 24 | 69x34 | 135 | | 116X34x47 |
| **7SH** | 7 | 70 | 24 | 76x34 | 145 | | 129X34x47 |
| **8SH** | 8 | 80 | 28 | 86x38 | 175 | 5" rubber casters 8" polyolefin wheels | 142x38x47 |
| **9SH** | 9 | 90 | 28 | 94x38 | 205 | | 155x38x47 |
| **10SH** | 10 | 100 | 28 | 102x38 | 230 | | 168x38x47 |
| **11SH** | 11 | 110 | 28 | 109x38 | 250 | | 181x38x47 |
| **12SH** | 12 | 120 | 28 | 119x38 | 270 | | 195x38x47 |
| **13SH** | 13 | 130 | 28 | 128x38 | 290 | | 208x38x47 |
| **14SH** | 14 | 140 | 28 | 136x38 | 315 | | 221x38x47 |
| **15SH** | 15 | 150 | 28 | 144x44 | 340 | | 234x44x47 |
| **16SH** | 16 | 160 | 28 | 153x46 | 365 | | 247x46x47 |


8SH

* • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
• Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
• Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
• Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:
• Ladder Assembly Instructions and User Guide
• Schematic Drawings with dimensions and isometric view
• Canway Certification Statement covering Mobile Ladder Stands


**Shipping Details:**
1-5 step ladders ship fully assembled.
6 step and larger ladders ship knocked down.
Shipping 6 step and larger ladders fully assembled is only available on select sizes. Extra freight charges will be incurred.
- H Mobile Ladder Stands: 6H – 14H
- SH Safety Angle Mobile Ladder Stands: 6SH – 8SH
- HR RIP Mobile Ladder Stands: 6HR – 14HR
- SHR RIP Mobile Ladder Stands: 6SHR – 9SHR

♦ Stock item


# SH-SS Stainless Steel Safety Angle Mobile Ladder Stands*

- 50° safety angle ladder
- 1" stainless steel round tube construction
- Clean room finish
- 304 #4 brushed finish
- 42" high handrail
- 19" platform depth
- Positive floor locking trip-step mechanism
- 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 400 lbs. capacity
- 2SH-SS – 5H-SS ship fully assembled; 6SH-SS – 16SH-SS ship knocked down
- All components except casters and springs are fabricated from high quality stainless steel

OPTIONS:
~ Front or side walk-through (comes with safety chains or gate)
~ Extended platform
~ Fold-down handrail
~ 316 #4 brushed finish
*Please call for details.*

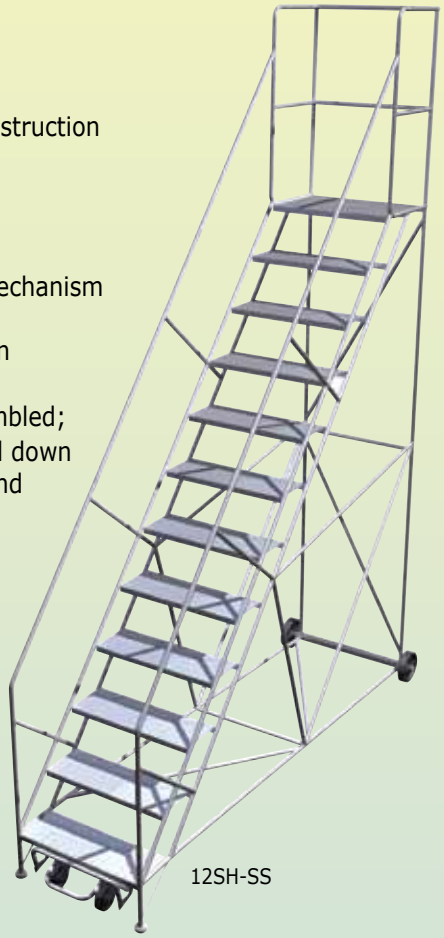
12SH-SS

**Diamond Channel Grating**



**DCG-H** 7-1/2" deep tread standard
**DCG-SH** 9-1/2" deep tread for safety ladders


5SH-SS

## Wheel Description

For all wheel & caster info & details, please see Section 13.



♦ **6PO**
6" polyolefin wheel (4-7SH-SS ladders)



♦ **8PO**
8" polyolefin wheel (8-16SH-SS ladders)

| Part Number | No. of Steps | Platform Height (in.) | Step Width (in.) | Base Size (in.) LxW | Weight (lbs.) | Wheel/Caster Type & Size (in.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|---|
| **2SH-SS** | 2 | 20 | 24 | 31x28 | 50 | 3" spring-loaded non-marking casters | 31x28x62 |
| **3SH-SS** | 3 | 30 | 24 | 41x28 | 65 | | 41x28x72 |
| **4SH-SS** | 4 | 40 | 24 | 53x34 | 105 | 5" rubber casters 6" polyolefin wheels | 53x34x82 |
| **5SH-SS** | 5 | 50 | 24 | 59x34 | 120 | | 59x34x92 |
| **6SH-SS** | 6 | 60 | 24 | 69x34 | 135 | | 116x34x47 |
| **7SH-SS** | 7 | 70 | 24 | 76x34 | 145 | | 129x34x47 |
| **8SH-SS** | 8 | 80 | 28 | 86x38 | 175 | 5" rubber casters 8" polyolefin wheels | 142x38x47 |
| **9SH-SS** | 9 | 90 | 28 | 94x38 | 205 | | 155x38x47 |
| **10SH-SS** | 10 | 100 | 28 | 102x38 | 230 | | 168x38x47 |
| **11SH-SS** | 11 | 110 | 28 | 109x38 | 250 | | 181x38x47 |
| **12SH-SS** | 12 | 120 | 28 | 119x38 | 270 | | 195x38x47 |
| **13SH-SS** | 13 | 130 | 28 | 128x38 | 290 | | 208x38x47 |
| **14SH-SS** | 14 | 140 | 28 | 136x38 | 315 | | 221x38x47 |
| **15SH-SS** | 15 | 150 | 28 | 144x44 | 340 | | 234x44x47 |
| **16SH-SS** | 16 | 160 | 28 | 153x46 | 365 | | 247x46x47 |

**Parts for 2–3SH-SS ladders**




♦ **CAS-3TPR-SET**
3" swivel spring-loaded caster, c/w spring & cotter pin

**Parts for 4–16SH-SS ladders**



♦ **CAS-5RSX-TS**
5RSX swivel c/w threaded stem

**Parts for SH-SS ladders**



♦ **RP2534:** Rubber Pad assembly

* • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
• Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
• Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
• Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:
- Ladder Assembly Instructions and User Guide
- Schematic Drawings with dimensions and isometric view
- Canway Certification Statement covering Mobile Ladder Stands

♦ Stock item



8HR

## HR RIP Mobile Ladder Stands*

- Rotates in Place (RIP) to reduce turning radius in tight situations
- 1" x 16 ga. round tube construction
- 42" high handrail
- 15" platform depth
- Positive floor locking trip step mechanism
- 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 400 lb. capacity
- Ships knocked down – assembly required
- Durable blue powder coat finish

OPTIONS:
~ Front or side walk-through (comes with safety chains or gate)
~ Extended platform ~ Fold-down handrail *Please call for details.*

**Diamond Channel Grating**



**DCG-H** 7-1/2" deep tread standard
**DCG-SH** 9-1/2" deep tread for safety ladders

**Wheel Description**
For all wheel & caster info & details, please see Section 13.




♦ **8PO**
8" polyolefin wheel (8–16HR ladders)

| Part Number | No. of Steps | Platform Height (in.) | Step Width (in.) | Base Size (in.) LxW | Weight (lbs.) | Wheel/ Caster Type & Size (in.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|---|
| **6HR** | 6 | 54 | 28 | 46x36 | 165 | 5" rubber casters 8" polyolefin wheels | 103x36x37 |
| **7HR** | 7 | 63 | 28 | 50x36 | 180 | | 110x36x37 |
| **8HR** | 8 | 72 | 28 | 56x37 | 205 | | 125x37x37 |
| **9HR** | 9 | 81 | 28 | 62x37 | 220 | | 136x37x37 |
| **10HR** | 10 | 90 | 28 | 67x37 | 240 | | 147x37x37 |
| **11HR** | 11 | 99 | 28 | 71x37 | 255 | | 157x37x37 |
| **12HR** | 12 | 108 | 28 | 78x37 | 270 | | 166x37x37 |
| **13HR** | 13 | 117 | 28 | 83x37 | 290 | | 177x37x37 |
| **14HR** | 14 | 126 | 28 | 87x37 | 310 | | 187x37x37 |
| **15HR** | 15 | 135 | 28 | 92x37 | 330 | | 197x37x37 |
| **16HR** | 16 | 144 | 28 | 98x37 | 355 | | 208x37x37 |

**HR & HR-SS ladder parts**

♦ **RP2534:** Rubber Pad assembly



♦ **CAS-5RSX-TS** 5RSX swivel c/w threaded stem



## HR-SS Stainless Steel RIP Mobile Ladder Stands*

- Rotates in Place (RIP) to reduce turning radius in tight situations
- 1" stainless steel round tube construction
- Clean room finish
- 42" high handrail
- 5" x 1-1/4" RSX rubber swivel casters
- Positive floor locking trip step mechanism
- 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 15" platform depth
- 400 lb. capacity
- All components except casters and springs are fabricated from high quality stainless steel
- Ships knocked down - assembly required

OPTIONS:
~ Front or side walk-through (comes with safety chains or gate)
~ Extended platform ~ Fold-down handrail *Please call for details.*

| Part Number | No. of Steps | Platform Height (in.) | Step Width (in.) | Base Size (in.) LxW | Weight (lbs.) | Wheel/ Caster Type & Size (in.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|---|
| **6HR-SS** | 6 | 54 | 28 | 46x36 | 165 | 5" rubber casters 8" polyolefin wheels | 103x36x37 |
| **7HR-SS** | 7 | 63 | 28 | 50x36 | 180 | | 110x36x37 |
| **8HR-SS** | 8 | 72 | 28 | 56x37 | 205 | | 125x37x37 |
| **9HR-SS** | 9 | 81 | 28 | 62x37 | 220 | | 136x37x37 |
| **10HR-SS** | 10 | 90 | 28 | 67x37 | 240 | | 147x37x37 |
| **11HR-SS** | 11 | 99 | 28 | 71x37 | 255 | | 157x37x37 |
| **12HR-SS** | 12 | 108 | 28 | 78x37 | 270 | | 166x37x37 |
| **13HR-SS** | 13 | 117 | 28 | 83x37 | 290 | | 177x37x37 |
| **14HR-SS** | 14 | 126 | 28 | 87x37 | 310 | | 187x37x37 |
| **15HR-SS** | 15 | 135 | 28 | 92x37 | 330 | | 197x37x37 |
| **16HR-SS** | 16 | 144 | 28 | 98x37 | 355 | | 208x37x37 |

**Shipping Details:**
1-5 step ladders ship fully assembled.
6 step and larger ladders ship knocked down.
Shipping 6 step and larger ladders fully assembled is only available on select sizes. Extra freight charges will be incurred.
- H Mobile Ladder Stands: 6H – 14H
- SH Safety Angle Mobile Ladder Stands: 6SH – 8SH
- HR RIP Mobile Ladder Stands: 6HR – 14HR
- SHR RIP Mobile Ladder Stands: 6SHR – 9SHR

* • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
• Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
• Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
• Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:
- Ladder Assembly Instructions and User Guide
- Schematic Drawings with dimensions and isometric view
- Canway Certification Statement covering Mobile Ladder Stands

♦ Stock item

# SHR RIP Safety Angle Mobile Ladder Stands*




7SHR

- Rotates in Place (RIP) to reduce turning radius in tight situations
- 50° safety angle ladder
- 1" x 16 ga. round tube construction
- 42" high handrail
- 19" platform depth
- Positive floor locking trip step mechanism
- 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 400 lb. capacity
- Ships knocked down – assembly required
- Durable blue powder coat finish

OPTIONS:
~ Front or side walk-through (comes with safety chains or gate)
~ Extended platform ~ Fold-down handrail *Please call for details.*

**Diamond Channel Grating**



**DCG-H** 7-1/2" deep tread for standard ladders
**DCG-SH** 9-1/2" deep tread for safety ladders

| Part Number | No. of Steps | Platform Height (in.) | Step Width (in.) | Base Size (in.) LxW | Weight (lbs.) | Wheel/ Caster Type & Size (in.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|---|
| **6SHR** | 6 | 60 | 28 | 66x37 | 190 | 5" rubber casters 8" polyolefin wheels | 118x37x41 |
| **7SHR** | 7 | 70 | 28 | 72x37 | 215 | | 131x37x41 |
| **8SHR** | 8 | 80 | 28 | 81x37 | 240 | | 144x37x41 |
| **9SHR** | 9 | 90 | 28 | 89x37 | 265 | | 157x37x41 |
| **10SHR** | 10 | 100 | 28 | 97x37 | 290 | | 170x37x41 |
| **11SHR** | 11 | 110 | 28 | 105x37 | 315 | | 183x37x41 |
| **12SHR** | 12 | 120 | 28 | 114x37 | 330 | | 197x37x41 |
| **13SHR** | 13 | 130 | 28 | 123x37 | 350 | | 210x37x41 |
| **14SHR** | 14 | 140 | 28 | 133x37 | 365 | | 223x37x41 |
| **15SHR** | 15 | 150 | 28 | 139x37 | 385 | | 236x37x41 |
| **16SHR** | 16 | 160 | 28 | 148x37 | 405 | | 249x37x41 |


**Wheel Description**
For all wheel & caster info & details, please see Section 13.



♦ **8PO**
8" polyolefin wheel (8–16SHR ladders)

**SHR & SHR-SS ladder parts**

♦ **RP2534:** Rubber Pad assembly



♦ **CAS-5RSX-TS**
5RSX swivel c/w threaded stem



# SHR-SS Stainless Steel RIP Mobile Ladder Stands*

- Rotates in Place (RIP) to reduce turning radius in tight situations
- 1" stainless steel round tube construction
- Clean room finish
- 304 #4 brushed finish
- 50° safety angle ladder
- 42" high handrail
- 19" platform depth
- Positive floor locking trip step mechanism
- 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 400 lb. capacity
- All components except casters and springs are fabricated from high quality stainless steel
- Ships knocked down – assembly required

OPTIONS:
~ Front or side walk-through (comes with safety chains or gate)
~ Extended platform
~ Fold-down handrail
~ 316 #4 brushed finish
*Please call for details.*

| Part Number | No. of Steps | Platform Height (in.) | Step Width (in.) | Base Size (in.) LxW | Weight (lbs.) | Wheel/ Caster Type & Size (in.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|---|
| **6SHR-SS** | 6 | 60 | 28 | 66x37 | 190 | 5" rubber casters 8" polyolefin wheels | 118x37x41 |
| **7SHR-SS** | 7 | 70 | 28 | 72x37 | 215 | | 131x37x41 |
| **8SHR-SS** | 8 | 80 | 28 | 81x37 | 240 | | 144x37x41 |
| **9SHR-SS** | 9 | 90 | 28 | 89x37 | 265 | | 157x37x41 |
| **10SHR-SS** | 10 | 100 | 28 | 97x37 | 290 | | 170x37x41 |
| **11SHR-SS** | 11 | 110 | 28 | 105x37 | 315 | | 183x37x41 |
| **12SHR-SS** | 12 | 120 | 28 | 114x37 | 330 | | 197x37x41 |
| **13SHR-SS** | 13 | 130 | 28 | 123x37 | 350 | | 210x37x41 |
| **14SHR-SS** | 14 | 140 | 28 | 133x37 | 365 | | 223x37x41 |
| **15SHR-SS** | 15 | 150 | 28 | 139x37 | 385 | | 236x37x41 |
| **16SHR-SS** | 16 | 160 | 28 | 148x37 | 405 | | 249x37x41 |

* • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
• Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
• Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
• Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:
- Ladder Assembly Instructions and User Guide
- Schematic Drawings with dimensions and isometric view
- Canway Certification Statement covering Mobile Ladder Stands

♦ Stock item

## ML – Mechanic's Ladder*




- Tilt and roll mobility
- 1" x 16 ga. round tube construction
- 24" wide x 22-1/2" deep platform
- 7-1/2" deep, non-slip, perforated steps
- 26" wide x 10" deep removable tool shelf
- Two 5" diameter rubber wheels
- 400 lb. capacity
- Durable blue powder coat finish


ML-4H

| Part Number | No. of Steps | Platform Height (in.) | Base Size (in.) LxW | Overall Height (in.) | Weight (lbs.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|
| **ML-3H** | 3 | 27 | 44x28 | 69 | 85 | 44x28x69 |
| **ML-4H** | 4 | 36 | 48x28 | 78 | 95 | 48x28x78 |
| **ML-5H** | 5 | 45 | 52x28 | 87 | 105 | 52x28x87 |
| **ML-6H** | 6 | 54 | 56x28 | 96 | 115 | 56x28x96 |

## TR- Tilt and Roll Ladder*

- Tilt and roll into position
- 1" x 16 ga. round tube construction
- Extra large platform 24" wide x 22-1/2" deep
- Ladder rolls on two 5" diameter rubber wheels
- Rests on four 2-1/2" diameter rubber pads to secure ladder to floor during use
- 42" high handrail
- 24" wide x 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 22-1/2" platform depth
- 400 lb capacity
- Durable blue powder coat finish



5H-TR

**ML & TR ladder parts**

♦ **WHL-5RSX wheel**



♦ **RP2534:** Rubber Pad assembly



| Part Number | No. of Steps | Platform Height (in.) | Base Size (in.) | Overall Height (in.) | Weight (lbs.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|
| **2H-TR** | 2 | 18 | 40x28 | 61 | 51 | 40x28x61 |
| **3H-TR** | 3 | 27 | 44x28 | 70 | 65 | 44x28x70 |
| **4H-TR** | 4 | 36 | 47x28 | 78 | 80 | 47x28x78 |
| **5H-TR** | 5 | 45 | 51x28 | 87 | 95 | 51x28x87 |
| **6H-TR** | 6 | 54 | 55x28 | 96 | 110 | 55x28x96 |

* • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
• Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
• Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
• Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:
• Ladder Assembly Instructions and User Guide
• Schematic Drawings with dimensions and isometric view
• Canway Certification Statement covering Mobile Ladder Stands

♦ Stock item

## 2NH Tilt 'n' Roll*

- Allows for easy maneuvering of ladder
- 5"x1-1/4" rubber rigid wheels mounted on left side
- 2 step ladder, with platform
- 4 heavy duty rubber grip pads for secure footing
- 43" upright handle
- Heavy duty all-welded construction
- Durable blue powder coat finish


2NH-TR


| Part Number | No. of Steps | Platform Height (in.) | Step Width | Base Size (in.) | Weight (lbs.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|
| **2NH-TR** | 2 | 18 | 24 | 33x24 | 37 | 24x43x34 |

**Ladder parts for this page and next**

♦ **WHL-5RSX wheel**



♦ **RP2534:** Rubber Pad assembly



## Lock 'n' Stock*

- Easy to maneuver
- Heavy duty all-welded construction
- 16" x 7-1/2" deep non-slip raised, perforated, dimpled tread patte
- Locks when in the climbing position
- Folds to 10" deep and locks for compact storage
- 4 heavy duty rubber grip pads for secure footing
- 400 lb. capacity
- Durable blue powder coat finish


3LNS

| Part Number | No. of Steps | Platform Height (in.) | Step Width (in.) | Base Size (in.) | Weight (lbs.) | Wheel Type & Size | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|---|
| **2LNS** | 2 | 20 | 16 | 17x22 | 27 | 5" rubber wheel | 23x11x45 |
| **3LNS** | 3 | 30 | 16 | 24x22 | 35 | | 23x11x57 |
| **4LNS** | 4 | 40 | 16 | 31x22 | 43 | | 23x11x69 |

**Shipping Details:**
1-5 step ladders ship fully assembled.
6 step and larger ladders ship knocked down.
Shipping 6 step and larger ladders fully assembled is only available on select sizes. Extra freight charges will be incurred.

- H Mobile Ladder Stands: 6H – 14H
- SH Safety Angle Mobile Ladder Stands: 6SH – 8SH
- HR RIP Mobile Ladder Stands: 6HR – 14HR
- SHR RIP Mobile Ladder Stands: 6SHR – 9SHR

## Step Stool*

- Lightweight 2 step stool
- 20" x 9-1/2" platform
- 18" top step height
- Non-slip raised, perforated, dimpled tread pattern
- 50° safety angle incline
- Heavy duty all-welded aluminum or steel construction
- Robust grey glides for secure footing
- Durable blue powder coat finish


2NH-ST

| Part Number | No. of Steps | Platform Height (in.) | Step Width (in.) | Base Size (in.) | Weight (lbs.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|
| **2NH-ST** | 2 | 18 | 20 | 22x20 | 20.5 | 20x22x18 |
| **2ANH-ST** | 2 | 18 | 20 | 22x20 | 9 | 20x22x18 |

* • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
• Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
• Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
• Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum





♦ Stock item


5SH-TAL

## Trailer Access Ladder*

- Provides a secure access to tractor and cube vans
- 24" x 22-1/2" platform
- 50° safety angle ladder allows user to face forward while descending
- Front walk through with safety chains
- Heavy duty all-welded construction
- 400 lb. capacity
- 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 10" flat free wheels
- Durable blue powder coat finish

**Shipping Details:**
1-5 step ladders ship fully assembled.
6 step and larger ladders ship knocked down.
Shipping 6 step and larger ladders fully assembled is only available on select sizes. Extra freight charges will be incurred.

- H Mobile Ladder Stands: 6H – 14H
- SH Safety Angle Mobile Ladder Stands: 6SH – 8SH
- HR RIP Mobile Ladder Stands: 6HR – 14HR
- SHR RIP Mobile Ladder Stands: 6SHR – 9SHR

| Part Number | No. of Steps | Platform Height (in.) | Step Width (in.) | Base Size (in.) | Weight (lbs.) | Wheel/Caster Type & Size (in.) | Shipping Size (in.) WxLxH |
|---|---|---|---|---|---|---|---|
| **4SH-TAL** | 4 | 40 | 24 | 34x56 | 112 | 10" flat-free wheels | 34x56x82 |
| **5SH-TAL** | 5 | 50 | 24 | 33x64 | 125 | | 32x65x92 |
| **6SH-TAL** | 6 | 60 | 24 | 34x73 | 138 | | 34x73x102 |

### Wheel Description

For all wheel & caster info & details, please see Section 13.



♦ **10FF**
10" flat free polyurethane

## Lever Lift Mobile Ladder Stands*

- Unique lever lift action for easy maneuvering
- 1" x 16 ga. round tube construction
- 42" high handrail
- 15" platform depth
- Heavy duty all-welded construction
- 400 lb. capacity
- Ships knocked down – assembly required
- Durable blue powder coat finish

**H-LL**
- 60° incline angle
- 15" platform depth
- 7-1/2" deep, non-slip raised, perforated, dimpled tread pattern

**SH-LL**
- 50° incline angle
- 19" platform depth
- 9-1/2" deep, non-slip raised, perforated, dimpled tread pattern


7H-LL

OPTION: Fold-down handrail

| Part Number | No. of Steps | Platform Height (in.) | Step Width (in.) | Base Size (in.) | Weight (lbs.) | Caster Type & Size (in.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|---|
| **4H-LL** | 4 | 36 | 24 | 37x34 | 85 | 4" rubber casters | 37x34x78 |
| **5H-LL** | 5 | 45 | 24 | 43x34 | 95 | | 43x34x87 |
| **6H-LL** | 6 | 54 | 24 | 48x34 | 115 | | 102x34x39 |
| **7H-LL** | 7 | 63 | 24 | 53x34 | 125 | | 110x34x39 |
| **8H-LL** | 8 | 72 | 28 | 59x38 | 150 | 5" rubber casters | 124x38x39 |
| **9H-LL** | 9 | 81 | 28 | 65x38 | 170 | | 136x38x39 |
| **10H-LL** | 10 | 90 | 28 | 70x38 | 175 | | 144x38x39 |
| **11H-LL** | 11 | 99 | 28 | 75x38 | 180 | | 155x38x39 |
| **12H-LL** | 12 | 108 | 28 | 81x38 | 200 | | 166x38x39 |
| **13H-LL** | 13 | 117 | 28 | 86x38 | 215 | | 177x38x39 |
| **14H-LL** | 14 | 126 | 28 | 89x38 | 250 | | 187x38x39 |
| **15H-LL** | 15 | 135 | 28 | 94x38 | 260 | | 197x38x39 |
| **16H-LL** | 16 | 144 | 28 | 100x38 | 270 | | 208x38x39 |
| **4SH-LL** | 4 | 40 | 24 | 53x34 | 105 | 4" rubber casters | 53x34x47 |
| **5SH-LL** | 5 | 50 | 24 | 59x34 | 120 | | 59x34x47 |
| **6SH-LL** | 6 | 60 | 24 | 69x34 | 135 | | 116X34x47 |
| **7SH-LL** | 7 | 70 | 24 | 76x34 | 145 | | 129X34x47 |
| **8SH-LL** | 8 | 80 | 28 | 86x38 | 175 | 5" rubber casters | 142x38x47 |
| **9SH-LL** | 9 | 90 | 28 | 94x38 | 205 | | 155x38x47 |
| **10SH-LL** | 10 | 100 | 28 | 102x38 | 230 | | 168x38x47 |
| **11SH-LL** | 11 | 110 | 28 | 109x38 | 250 | | 181x38x47 |
| **12SH-LL** | 12 | 120 | 28 | 119x38 | 270 | | 195x38x47 |
| **13SH-LL** | 13 | 130 | 28 | 128x38 | 290 | | 208x38x47 |
| **14SH-LL** | 14 | 140 | 28 | 136x38 | 315 | | 221x38x47 |
| **15SH-LL** | 15 | 150 | 28 | 144x44 | 340 | | 234x44x47 |
| **16SH-LL** | 16 | 160 | 28 | 153x46 | 365 | | 247x46x47 |

* • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
• Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
• Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
• Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:
- Ladder Assembly Instructions and User Guide
- Schematic Drawings with dimensions and isometric view
- Canway Certification Statement covering Mobile Ladder Stands

♦ Stock item




4SH-RWP

## Rolling Work Platforms*

- Extra Large platform fits 2 people and equipment.
- 50° safety angle ladder allows user to face forward while descending
- 36" x 36" platform size
- Positive floor locking trip step mechanism
- Heavy duty all-welded construction
- 9-1/2" deep non-slip diamond channel grating tread
- Complies with OSHA and ANSI standards
- 800 lb. capacity
- Ships fully assembled
- Durable blue powder coat finish

♦ **RP2534:** Rubber Pad assembly



♦ **CAS-5RSX-TS** 5RSX swivel c/w threaded stem



| Part Number | No. of Steps | Platform Height (in.) | Step Width (in.) | Base Size (in.) | Weight (lbs.) | Caster Type & Size (in.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|---|
| **3SH-RWP** | 3 | 30 | 36 | 46x62 | 105 | 5" rubber casters | 62x46x72 |
| **4SH-RWP** | 4 | 40 | 36 | 46x70 | 124 | | 70x46x82 |
| **5SH-RWP** | 5 | 50 | 36 | 46x78 | 143 | | 78x46x92 |

# Ladder Options

## Tool Tray

- Removable work tray for additional working area
- Available on all ladders with handrails
- 10" by 26" or 30" workable area.




TT26

| Part Number | Tray Size | Capacity (lb.) | Weight (in.) | Shipping Size LxWxH (in.) |
|---|---|---|---|---|
| **TT26** | 10x26 | 100 | 8 | 26x13x13 |
| **TT30** | 10x30 | 100 | 10 | 30x13x13 |
| **TT38** | 10x38 | 100 | 15 | 38x13x13 |

## Diamond Channel Grating

- 7-1/2" deep (DCG-H) for standard ladders or 9-1/2" deep (DCG-SH) non-slip tread for safety ladders
- Durable blue powder coat finish

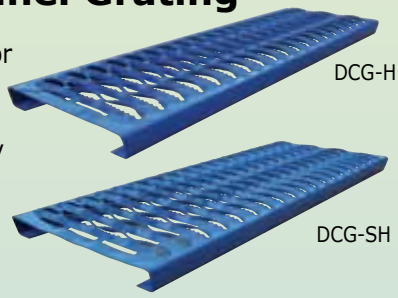

DCG-H

DCG-SH

## Vertical Pickets

- For retail applications



## Gated Walk-through Options on H Series Ladders

- Allows for easy access to platforms and other raised surfaces.
- Available with safety chains or a gate
- Front, left, or right walk-through available
- Side walk-through ladders have an extended platform



FWT Double Gate



LWT Single Gate

## Fold-down Handrail








♦ Stock item



Control Switch

## ESL Electric Mobile Ladder Stands*

- 12 volt low maintenance Dry Cell Battery c/w onboard charger system
- Upgraded heavy duty WARN 1200 Series industrial winch
- Industrial contact limit switches at top and bottom position for additional safety
- Requires 110 volt duplex power outlet for battery charger (not included)
- Power system only requires battery terminal cables to be connected at time of assembly
- Heavy duty 300 lb. capacity cargo shelf, 30" x 30"
- Integral shelf column mounted vertically on back of ladder stand c/w extended reinforced chassis
- 1" x 16 ga. round tube construction
- 42" high handrail
- 22-1/2" platform depth
- Two 5" x 1-1/4" RSX rubber swivel casters and two 6" x 2" mold on rubber casters
- Positive floor locking trip step mechanism
- 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- Durable blue powder coat finish
- Modular knock down "KD" construction for compact shipping

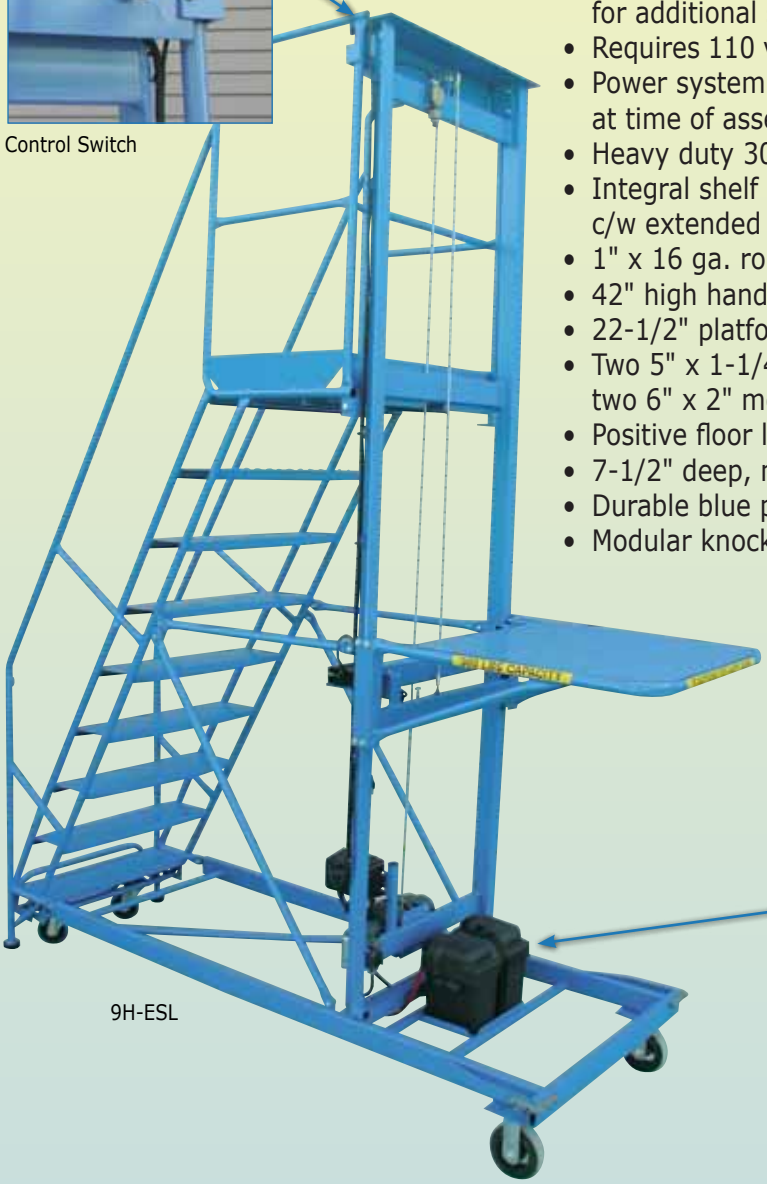

9H-ESL



Winch & Battery Detail

| Part Number | No. of Steps | Platform Height (in.) | Step Width (in.) | Base Size (in.) LxW | Weight (lbs.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|
| **7H-ESL** | 7 | 63 | 28 | 87x36 | 455 | 113x36x61 |
| **8H-ESL** | 8 | 72 | 28 | 92x36 | 465 | 127x36x61 |
| **9H-ESL** | 9 | 81 | 28 | 97x36 | 485 | 137x36x61 |
| **10H-ESL** | 10 | 90 | 28 | 102x36 | 515 | 148x36x61 |
| **11H-ESL** | 11 | 99 | 28 | 107x36 | 535 | 158x36x61 |
| **12H-ESL** | 12 | 108 | 28 | 114x36 | 555 | 169x36x61 |

* • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
• Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
• Maximum rated load: 400 lbs (one person only)

See website for:
• Ladder Assembly Instructions and User Guide
• Schematic Drawings with dimensions and isometric view
• Canway Certification Statement covering Mobile Ladder Stands

**ESL ladder parts**

♦ **CAS-5RSX-TS** 5RSX swivel c/w threaded stem



♦ **RP2534:** Rubber Pad assembly



**Caster Description**

For all wheel & caster info & details, please see Section 13.



♦ **6MR**
6" molded rubber caster

♦ Stock item

# MSL Manual Mobile Ladder Stands*

- Heavy duty 300 lb. capacity cargo shelf, 30" x 30"
- Integral shelf column mounted vertically on back of ladder stand c/w extended reinforced chassis
- 1" x 16 ga. round tube construction
- 42" high handrail
- 22-1/2" platform depth
- Two 5" x 1-1/4" RSX rubber swivel casters and two 6" x 2" mold on rubber casters
- Positive floor locking trip step mechanism
- 7-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- Durable blue powder coat finish
- Modular knock down "KD" construction for compact shipping



10H-MSL



Platform Detail



Shipping Position


| Part Number | No. of Steps | Platform Height (in.) | Step Width (in.) | Base Size (in.) LxW | Weight (lbs.) | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|
| **7H-MSL** | 7 | 63 | 28 | 87x36 | 355 | 113x36x61 |
| **8H-MSL** | 8 | 72 | 28 | 92x36 | 365 | 127x36x61 |
| **9H-MSL** | 9 | 81 | 28 | 97x36 | 385 | 137x36x61 |
| **10H-MSL** | 10 | 90 | 28 | 102x36 | 415 | 148x36x61 |
| **11H-MSL** | 11 | 99 | 28 | 107x36 | 435 | 158x36x61 |
| **12H-MSL** | 12 | 108 | 28 | 114x36 | 455 | 169x36x61 |

**MSL ladder parts**

♦ **CAS-5RSX-TS** 5RSX swivel c/w threaded stem



♦ **RP2534:** Rubber Pad assembly



**Wheel Description**

For all wheel & caster info & details, please see Section 13.



♦ **6MR**
6" molded rubber caster


* • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
• Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
• Maximum rated load: 400 lbs (one person only)

See website for:
• Ladder Assembly Instructions and User Guide
• Schematic Drawings with dimensions and isometric view
• Canway Certification Statement covering Mobile Ladder Stands

♦ Stock item

## Crossover Ladder - 60°

- Provides safe walkway over conveyors, machinery, pipes, and other obstacles
- 1" x 16 ga. round tube construction
- Standard perforated, raised, dimpled step
- 60° standard slope
- 400 lb. capacity
- Ships fully assembled
- Durable blue powder coat finish

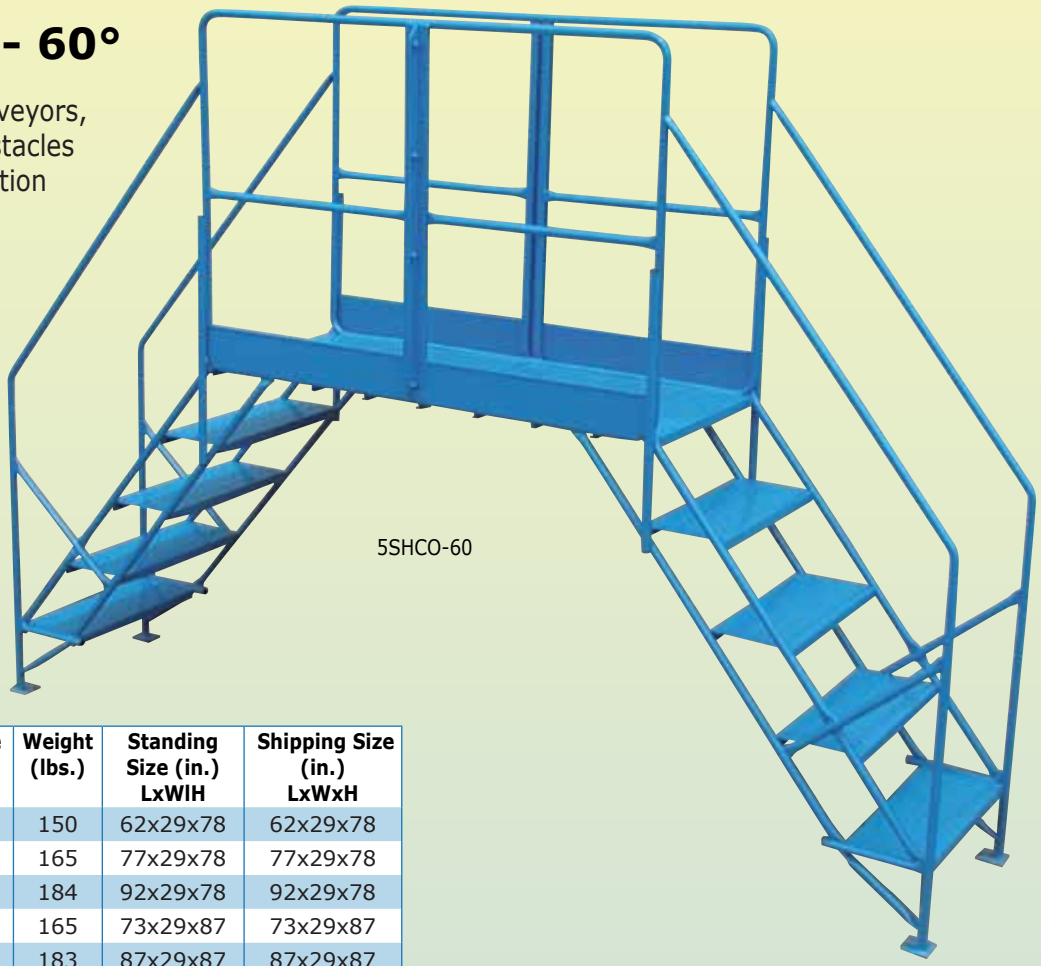

5SHCO-60

| Part Number | No. of Steps | Platform Size (in.) LxW | Clearance (in.) HxW | Weight (lbs.) | Standing Size (in.) LxWlH | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|
| **4HCO-30** | 4 | 30x24 | 34.5x13 | 150 | 62x29x78 | 62x29x78 |
| **4HCO-45** | 4 | 45x24 | 34.5x28 | 165 | 77x29x78 | 77x29x78 |
| **4HCO-60** | 4 | 60x24 | 34.5x43 | 184 | 92x29x78 | 92x29x78 |
| **5HCO-30** | 5 | 30x24 | 43.5x13 | 165 | 73x29x87 | 73x29x87 |
| **5HCO-45** | 5 | 45x24 | 43.5x28 | 183 | 87x29x87 | 87x29x87 |
| **5HCO-60** | 5 | 60x24 | 43.5x43 | 201 | 102x29x87 | 102x29x87 |
| **6HCO-30** | 6 | 30x24 | 52.5x13 | 181 | 83x29x96 | 83x29x96 |
| **6HCO-45** | 6 | 45x24 | 52.5x28 | 199 | 98x29x96 | 98x29x96 |
| **6HCO-60** | 6 | 60x24 | 52.5x43 | 218 | 113x29x96 | 113x29x96 |

## Crossover Ladder - 50°

- Provides safe walkway over conveyors, machinery, pipes, and other obstacles
- 1" x 16 ga. round tube construction
- Standard perforated, raised, dimpled step
- 50° standard slope
- 400 lb. capacity
- Ships fully assembled
- Durable blue powder coat finish

| Part Number | No. of Steps | Platform Size (in.) WxL | Clearance (in.) HxW | Weight (lbs.) | Standing Size (in.) LxWxH | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|
| **4SHCO-30** | 4 | 30x24 | 38.5x10 | 161 | 85x29x82 | 85x29x82 |
| **4SHCO-45** | 4 | 45x24 | 38.5x25 | 179 | 100x29x82 | 100x29x82 |
| **4SHCO-60** | 4 | 69x24 | 38.5x40 | 198 | 115x29x82 | 115x29x82 |
| **5SHCO-30** | 5 | 30x24 | 48.5x10 | 181 | 98x29x92 | 98x29x92 |
| **5SHCO-45** | 5 | 45x24 | 48.5x25 | 218 | 128x29x92 | 128x29x92 |
| **5SHCO-60** | 5 | 60x24 | 48.5x40 | 210 | 129x29x92 | 129x29x92 |
| **6SHCO-30** | 6 | 30x24 | 58.5x10 | 201 | 116x29x107 | 116x29x107 |
| **6SHCO-45** | 6 | 45x24 | 58.5x25 | 219 | 131x29x102 | 131x29x102 |
| **6SHCO-60** | 6 | 60x24 | 58.5x40 | 237 | 146x29x102 | 146x29x102 |

* • Complies with mobile ladder standards ANSI 14.7 and OSHA 1910.29
• Complies with applicable safety standards as outlined in Ontario Occupational Health and Safety Act, Regulation 851
• Tested and approved by an Ontario Professional Engineer covering Ontario, Canada and United States of America, steel and stainless steel only
• Maximum rated load: 400 lbs (one person only) steel and stainless steel; maximum rated load: 300 lbs. (one person only) aluminum

See website for:
• Ladder Assembly Instructions and User Guide
• Schematic Drawings with dimensions and isometric view
• Canway Certification Statement covering Mobile Ladder Stands

♦ Stock item



6SH-CL-19-6PH




14SH-CL-47-6PH

# Cantilever Mobile Ladder Stands

- Cantilever design allows access to hard-to-reach areas
- 50° safety angle ladder allows user to face forward while descending
- 1" x 16 ga. round tube construction
- 42" high handrail
- 19" platform depth
- Four 6" phenolic casters, 2 swivel with total lock brake and 2 rigid
- 9-1/2" deep, non-slip, raised, perforated, dimpled tread pattern
- 400 lb. capacity
- Ships knocked down
- Durable blue powder coat finish

**Diamond Channel Grating**



**DCG-H** 7-1/2" deep tread standard
**DCG-SH** 9-1/2" deep tread for safety ladders

**Caster Description**

For all wheel & caster info & details, please see Section 13.



**6PH**
6" phenolic caster

| | Part Number | No. of Steps | Overhang Clearance HxD (in.) | Platform Height (in.) | Overall Dimensions (in.) LxWxH | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|
| 19" Overhang | **6SH-CL-19** | 6 | 58x16.5 | 60 | 81x39x103 | 116x39x79 |
| | **7SH-CL-19** | 7 | 68x16.5 | 70 | 89x39x113 | 129x39x79 |
| | **8SH-CL-19** | 8 | 78x16.5 | 80 | 98x39x123 | 142x39x79 |
| | **9SH-CL-19** | 9 | 88x16.5 | 90 | 106x39x133 | 155x39x79 |
| | **10SH-CL-19** | 10 | 98x16.5 | 100 | 114x39x143 | 168x39x79 |
| | **11SH-CL-19** | 11 | 108x16.5 | 110 | 123x39x153 | 181x39x79 |
| | **12SH-CL-19** | 12 | 118x16.5 | 120 | 131x39x163 | 194x39x79 |
| | **13SH-CL-19** | 13 | 128x16.5 | 130 | 140x39x173 | 207x39x79 |
| | **14SH-CL-19** | 14 | 138x16.5 | 140 | 148x39x183 | 220x39x79 |
| 28.5" Overhang | **6SH-CL-28** | 6 | 58x26 | 60 | 90x39x103 | 125x39x79 |
| | **7SH-CL-28** | 7 | 68x26 | 70 | 99x39x113 | 138x39x79 |
| | **8SH-CL-28** | 8 | 78x26 | 80 | 107x39x123 | 151x39x79 |
| | **9SH-CL-28** | 9 | 88x26 | 90 | 116x39x133 | 164x39x79 |
| | **10SH-CL-28** | 10 | 98x26 | 100 | 124x39x143 | 177x39x79 |
| | **11SH-CL-28** | 11 | 108x26 | 110 | 132x39x153 | 190x39x79 |
| | **12SH-CL-28** | 12 | 118x26 | 120 | 141x39x163 | 203x39x79 |
| | **13SH-CL-28** | 13 | 128x26 | 130 | 149x39x173 | 216x39x79 |
| | **14SH-CL-28** | 14 | 138x26 | 140 | 157x39x183 | 229x39x79 |
| 38" Overhang | **6SH-CL-38** | 6 | 58x35.5 | 60 | 100x39x103 | 134x39x79 |
| | **7SH-CL-38** | 7 | 68x35.5 | 70 | 108x39x113 | 147x39x79 |
| | **8SH-CL-38** | 8 | 78x35.5 | 80 | 117x39x123 | 160x39x79 |
| | **9SH-CL-38** | 9 | 88x35.5 | 90 | 125x39x133 | 173x39x79 |
| | **10SH-CL-38** | 10 | 98x35.5 | 100 | 133x39x143x | 186x39x79 |
| | **11SH-CL-38** | 11 | 108x35.5 | 110 | 142x39x153 | 199x39x79 |
| | **12SH-CL-38** | 12 | 118x35.5 | 120 | 150x39x163 | 212x39x79 |
| | **13SH-CL-38** | 13 | 128x35.5 | 130 | 159x39x173 | 225x39x79 |
| | **14SH-CL-38** | 14 | 138x35.5 | 140 | 167x39x183 | 238x39x79 |
| 47.5" Overhang | **6SH-CL-47** | 6 | 58x45 | 60 | 109x39x103 | 143x39x79 |
| | **7SH-CL-47** | 7 | 68x45 | 70 | 118x39x113 | 156x39x79 |
| | **8SH-CL-47** | 8 | 78x45 | 80 | 126x39x123 | 169x39x79 |
| | **9SH-CL-47** | 9 | 88x45 | 90 | 135x39x133 | 182x39x79 |
| | **10SH-CL-47** | 10 | 98x45 | 100 | 143x39x143 | 195x39x79 |
| | **11SH-CL-47** | 11 | 108x45 | 110 | 151x39x153 | 208x39x79 |
| | **12SH-CL-47** | 12 | 118x45 | 120 | 160x39x163 | 221x39x79 |
| | **13SH-CL-47** | 13 | 128x45 | 130 | 168x39x173 | 234x39x79 |
| | **14SH-CL-47** | 14 | 138x45 | 140 | 176x39x183 | 247x39x79 |

♦Stock item

**Shipping Details:**
1-5 step ladders ship fully assembled.
6 step and larger ladders ship knocked down.
Shipping 6 step and larger ladders fully assembled is only available on select sizes. Extra freight charges will be incurred.

- H Mobile Ladder Stands: 6H – 14H
- SH Safety Angle Mobile Ladder Stands: 6SH – 8SH
- HR RIP Mobile Ladder Stands: 6HR – 14HR
- SHR RIP Mobile Ladder Stands: 6SHR – 9SHR



## RDL Rolling Dock Ladder

- Safe alternative for sealing and unsealing open top shipping containers
- Extendable platform c/w incremental locking pin
- Compact side wall mount design "Easy Roll" track system to maintain optimum clearance
- Typically installed in pairs for optimum efficiency when in use
- Special orders available for unique applications









♦ Stock item

# BAP – Bus Access Platform

- Provides safe, enclosed work area for roof-top access and maintenance
- Lockable swing gates
- Platform includes heavy-duty phenolic swivel caster c/w foot brakes and 24" adjustable outriggers for optimal stability
- Electric shelf lift for battery maintenance and replacement
- 12 volt low maintenance dry cell battery c/w onboard charger system
- Upgraded heavy duty WARN 1200 Series industrial winch
- Industrial contact limit switches at top and bottom position for additional safety
- Requires 110 volt duplex power outlet for battery charger (not included)
- Power system only requires battery terminal cables to be connected at time of assembly
- Heavy duty 300 lbs. capacity cargo shelf
- Integral shelf column mounted vertically on back of ladder stand, c/w extended reinforced chassis







Top View





♦Stock item

# Narrow Aisle Mobile Ladder Stand



7H-20

- Narrow rolling ladder allows user to navigate through narrow aisles
- Overall width of 30-1/4"
- 1" x 16 ga. round tube construction
- 42" high handrail
- 15" platform depth
- Positive floor locking trip step mechanism
- 7-1/2" deep non-slip raised, perforated, dimpled tread pattern
- Heavy duty all-welded construction
- 400 lb. capacity
- Durable blue powder coat finish

OPTIONS:
~ Locking swivel casters
*Please call for details.*

**Parts for 1H – 3H ladders**



♦ **CAS-3TPR-SET**
3" swivel spring-loaded caster, c/w spring & cotter pin


**Parts for 4H – 10H ladders**



♦ **CAS-5RSX-TS**
5RSX swivel c/w threaded stem

**Parts for all H ladders**

♦ **RP2534:** Rubber Pad assembly



**Wheel Description**
For all wheel & caster info & details, please see Section 13.



♦ **6PO**
6" polyolefin wheel (4H-7H ladders)



♦ **8PO**
8" polyolefin wheel (8H-20H ladders)

| Part Number | No. of Steps | Platform Height (in.) | Step Width (in.) | Base Size (in.) LxW | Weight (lb.) | Caster Type and Size | Shipping Size (in.) LxWxH |
|---|---|---|---|---|---|---|---|
| **3H-20** | 3 | 27 | 20 | 31x24 | 55 | 3" spring-loaded non-marking casters | 31x24x69 |
| **4H-20** | 4 | 36 | 20 | 39x30-1/4 | 80 | 5" rubber caster 6" polyolefin wheels | 39x31x78 |
| **5H-20** | 5 | 45 | 20 | 45x30-1/4 | 90 | | 45x31x87 |
| **6H-20** | 6 | 54 | 20 | 50x30-1/4 | 105 | | 102x31x39 |
| **7H-20** | 7 | 63 | 20 | 55x30-1/4 | 115 | | 110x31x39 |
| **8H-20** | 8 | 72 | 20 | 61x30-1/4 | 120 | 5" rubber caster 8" polyolefin wheels | 124x31x39 |
| **9H-20** | 9 | 81 | 20 | 66x30-1/4 | 135 | | 136x31x39 |
| **10H-20** | 10 | 90 | 20 | 72x30-1/4 | 142 | | 144x31x39 |

♦ Stock item