


## Beam Clamps

| Part No. | Lifting Capacity tons | Flange Widths in. | Net Weight lbs. |
|---|---|---|---|
| BC-1 | 1.0 | 2.95 - 8.25 | 8.8 |
| BC-2 | 2.0 | 2.95 - 8.25 | 10.1 |
| BC-3 | 3.0 | 2.95 - 12.0 | 18.5 |
| BC-5 | 5.0 | 2.95 - 12.0 | 21.1 |

## FEATURES

- Available in 1 to 5 ton capacities from 2.95″ to 12″ flange widths.
- Precision machined adjustment screw allows for quick, easy, and secure clamping to a variety of flange widths.
- Lightweight design and threaded adjustment screw allow for easy portability and installation.
- Compact design requires low headroom.
- Ideal for attaching to steel beams as a semi permanent lifting point to be used in combination with chain hoists & lever hoists.
- Can also be used to lift or transport steel beams.
- Tested to 150% of rated capacity. Test certificate includedwith every beam clamp.
- CE certified and compliant with ANSI B30.11 specifications.

## Beam Clamp Specifications

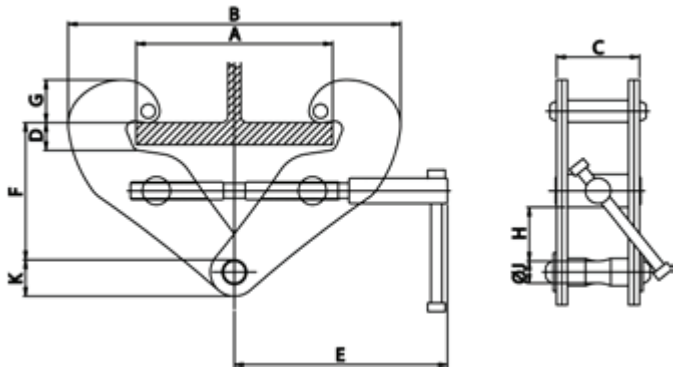


| Capacity tons | Test Load tons | Net Weight lbs. | A inch | B inch | C inch | D inch | E inch | F inch | G inch | J inch | K inch |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 1.5 | 8.8 | 3 - 8.3 | 7.2 - 13 | 3 | 1 | 7.5 | 5.7 - 4.6 | 2.1 - 1.5 | 0.8 | 1.3 |
| 2 | 3 | 10.1 | 3 - 8.3 | 7.2 - 13 | 3.3 | 1 | 7.5 | 5.7 - 4.6 | 2.1 - 1.5 | 0.8 | 1.3 |
| 3 | 4.5 | 18.5 | 3 - 12 | 8.4 - 18.1 | 4.2 | 1.4 | 9.5 | 8.8 - 7.1 | 2.3 - 1.6 | 0.9 | 1.6 |
| 5 | 7.5 | 22 | 3 - 12 | 8.4 - 18.1 | 4.8 | 1.4 | 9.5 | 8.7 - 7 | 2.3 - 1.6 | 1.1 | 1.8 |