WHAT'S NEW IN

Fall PROTECTION



Professional, World-Class Training

Honeywell offers comprehensive training options in Canada designed to help you comply with mandatory government and company safety at height training requirements. Courses are available for all levels of training and provide practical, hands-on learning through active participation that increases comprehension and retention.

- Conveniently located Regional Training Centers in Edmonton, Toronto and Montreal
- On-Site Contract Training tailored to meet your specific industry/site requirements
- A fleet of Mobile Product Demonstration units that visit your site and feature fall protection equipment and other Honeywell safety products
- On-line Training focuses on the user; teaching how to properly inspect and wear fall protection safety equipment
- Oil Sands Safety Association (OSSA) approved training programs that meet the required safety standards to help create an "incident-free" workforce

For complete Training details call us at 888.232.7585, or visit **www.millerfallprotection.com/training**.



MILLER® by Honeywell

NORTH® by Honeywell

⚠ **WARNING!** North and Miller Fall Protection equipment should be used only in conjunction with the manufacturer's instructions. Failure to follow such instructions could result in serious injury or fatality.

North Vest-Style Harness

- Back D-ring – For fall arrest applications (CSA class A)
- Adjustable leg and shoulder straps and sliding chest strap – allow wearers to find a safe and comfortable fit
- CSA approved and ANSI/OSHA compliant – suitable for use in all industries throughout North America

SKU	Shoulder D-rings	Side D-rings	Chest/ Leg Strap	Special Features
FP759/1DP	No	No	Mating	N/A
FP759/5DP	Yes	Yes	Mating	N/A
FP759/1DGP	No	No	Mating	N/A
FP759/1EDP	No	No	Mating	Extended D-ring
FP759/1DPXL	No	No	Mating	N/A



FP759/1DP

North Rite-On™ Harness

- Integrated back and shoulder pad – conforms to the wearer's shape to provide all-day comfort
- Fast-action quick connect buckles – allows quick and easy donning
- Extended D-ring option – makes lanyard connection easier and safer
- Sweat wicking pad fabric – keeps wearers comfortable in hot conditions
- Tangle-free pad design – harness keeps its shape between use, aiding quick and easy donning
- Lightweight polyester webbing – offers superior UV and chemical resistance
- Universal size with full adjustability – one size fits most
- CSA approved and ANSI/OSHA compliant – suitable for use in all industries throughout North America

SKU	Front D-rings	Side D-rings	Chest/ Leg Strap	Special Features
FP81F/1DBA	No	No	Quick-Connect	N/A
FP81F/1EDBA	No	No	Quick-Connect	Extended D-ring
FP81F/1DBA320	No	No	Quick-Connect	Attached energy absorber
FP81F/3DDA	No	Yes	Quick-Connect	N/A
FP81F/4DLA	Yes	Yes	Quick-Connect	N/A
FP81F/4EDLA	Yes	Yes	Quick-Connect	Extended D-ring



FP81F/1DBA

NORTH® by Honeywell

Call Customer Care at 888 212-7233.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

CONNECTING DEVICES



FP16E/PS50



FP542



FP541



FP1/303W



FP1/306W



FP1/305S

Rope Grabs and Lifelines

SKU	Description
FP541	Automatic panic lock rope grab – Carbon steel, automatic rope grab for use with 5/8-in. (16 mm) synthetic rope
FP542	FP541 with 2' (0.6 m) Lanyard energy absorber with snap hook
FP16E/PS50	Co-polymer blend rope lifeline with one end spliced with steel thimble; 5/8-in. (16 mm) diameter; 50-ft. (15 m). Also available in 25' and 100' lengths

**North rope-grabs are only approved for use with North ropes*

North DuraLite III

- Durable polymer housing
- One of the few CSA Type 1 units on the market that is serviceable, reducing cost of ownership
- Dyneema lifeline is up to 15 times stronger than quality steel and up to 40% stronger than aramid fibers
- Swiveling anchor prevents the webbing from twisting and tangling
- CSA Z259.2 Certified and Exceeds OSHA requirements

SKU	Description	Length
FP1/303W	DuraLite III with Dyneema/polyester webbing and swivel snap hook with load indicator	10 ft. (3.0 m)
FP1/304W	DuraLite III with Dyneema/polyester webbing and swivel snap hook with load indicator	12.6 ft. (3.6 m)

North DuraLite II

- Durable polymer housing
- Swiveling anchor prevents the webbing from twisting and tangling
- CSA Z259.2 Certified and Exceeds OSHA requirements
- Dyneema lifeline is up to 15 times stronger than quality steel and up to 40% stronger than aramid fibers

SKU	Description	Length
FP1/306W	DuraLite II with Dyneema/polyester webbing and double locking swivel snap hook with load indicator	20 ft. (6.0 m)

North Self-Retracting Lifelines

- Durable, compact construction
- Corrosion-resistant stainless steel lifeline
- Easy to operate

SKU	Description	Length
FP1/305S	3/16-in. (5 mm) stainless steel cable lifeline and locking swivel snap hook w/load indicator	16 ft. (4.8 m)
FP2/310S	3/16-in. (5 mm) stainless steel cable lifeline and swivel snap hook w/ load indicator	33 ft. (10.0 m)
FP2/315S	3/16-in. (5 mm) stainless steel cable lifeline and swivel double locking snap hook w/load indicator	50 ft. (15.2 m)

NORTH® by Honeywell


Call Customer Care at 888 212-7233.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

ANCHORAGE CONNECTORS

Temporary Anchorage Connectors

- Designed to wrap around approved I-beams or other structures for a secure attachment point for lanyards and self-retracting lifelines
- 400 lbs. maximum capacity

SKU	Description
FP02/6F	Cable Anchor Sling – PVC coated cable anchor sling with two Flemish eyes; 6' (1.82 m). Also available in other lengths
FP09/3	Web Anchor Sling – Cross-Arm Strap with web loops on both ends 2" (55 mm) heavy-duty nylon web; 3' (0.91 m)
FP242/6	Web Anchor Sling – Tiny'n Tough (T'nT) Anchor Sling is lightweight, small size and has exceptional strength – 3/4" (19 mm) web can be used without additional protective materials in concrete forming; 6' (1.82 m). Also available in other lengths
FP03/6	Pass Through Anchor Sling – 2" (50 mm) heavy-duty nylon web with small D-ring which passes through the large D-ring to form loop around anchor; 6' (1.82 m). Also available in other lengths



FP02/6F



FP242/6



FP09/3



FP03/6

HORIZONTAL LIFELINE SYSTEM

North Temporary Horizontal Lifeline System Kit

SKU	Description
FP1001	60' (18 m) of 5/8" (16 mm) synthetic lifeline rope, 2 carabiners, 2 anchor slings, 1 rope tensioner, 1 4-ft. (1.2m) lanyard with energy absorber and convenient carrying bag
FP1002	60' (18 m) of 3/8" (10 mm) galvanized cable, 2 anchor slings, cable tensioner and cable clips, Soft Pak energy absorber, 2 carabiner connectors



FP1001

NORTH®
by Honeywell

Call Customer Care at 888 212-7233.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

CONFINED SPACE & DAVIT SYSTEM



FP66/415SR

North Complete Confined Space Rescue Kit

SKU	Description
FP66/415SR	Includes Self-Retracting Lifeline with 50-ft. (15 m) of 3/16-in. (5 mm) stainless steel cable and snap hook with load indicator; 7-ft. (2 m) tripod; mounting bracket and storage bag

Bantamlift Davit System

- Components are made of strong aluminum alloy (except for bases)
- Rated for working loads up to 450 lbs.
- Provide a proof-tested 5,000 lbs. anchor (in most configurations) or at least a 2:1 safety factor when used with approved fall arrest devices
- Booms reach up to 48" (1219 mm)
- Various masts to meet your requirements

SKU	Description
FP6660/00	Davit fixed base
FP6661	Ladder davit base
FP6660/02	Davit concrete sleeve with flange
FP6662/00	Davit wall mount base
FP6671	Ladder davit fixed 12" (305 mm)
FP6670/24	Davit mast 12" to 24" (305 to 610 mm)
FP6680/24	Davit boom 12" to 24" (305 to 610 mm)
FP6670/48	Davit mast 26" to 48" (660 to 1219 mm)
FP6680/48	Davit boom 36" to 48" (914 to 1219 mm)



FP6671

North Personnel Winches

- The same robust durability and strength of the North 3-way SRL is found in the Personnel Winch; it can handle a variety of tasks including confined space entry/egress and rescue work; swivel snap hook equipped

SKU	Description
FP2/715SR	50-ft. (15 m) of 3/16" (5 mm) stainless cable with swivel snap hook
FP6610/15	Mounting bracket for FP2 series SRL and winch housing types



FP2/715SR

NORTH® by Honeywell

Call Customer Care at 888 212-7233.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

Exceeding worker expectations in comfort, fit, ease-of-use, durability, compliance, flexibility and convenience, the new Miller Revolution Harness provides over 11 key product features from 7 unique components.

Ultimate Comfort and Fit

Miller Revolution™ Harness

Enabled Safety Product

- PivotLink™ Connection – unique rotary design provides greater comfort in bending / mobility
- Integrated Accessory System – modular attachment design provides additional connection points for belts / tools / accessories
- ErgoArmor™ Back Shield – semi-flexible back shield minimizes impact from sharp / heavy snap hooks and self-retracting lifelines
- Web Finials – clip-on design safely organizes webbing after proper adjustment
- Self-Contained Label Pack – integrated pack encapsulates labels minimizing damage and loss

A variety of user-friendly accessories available, including: cell phone and radio holders; water bottle holder; bolt, nail and tool holders; hammer loops; plier/tool holder and utility pouch. Universal size (L/XL) fits most

SKU	Side D-rings	Chest/Leg Strap	Removable Belt
RDT-QC/UBK	No	Quick-Connect	No
RDT-QC-B/UBK	No	Quick-Connect	Yes
RDT-QC-DP/UBK	Yes	Quick-Connect	No
RDT-QC-BDP/UBK	Yes	Quick-Connect	Yes



Gold Winner International Spark Design Awards

RDT-QC/UBK

Miller DuraFlex Python® Ultra Harness

- Cushioned tubular webbing in the shoulder straps minimizes discomfort when required to wear a tool belt; patented DuraFlex® stretchable webbing in the lower torso increases worker mobility with less fatigue
- Quick-connect buckles on the chest and leg straps for easy donning; specially-woven, breathable, comfort-touch back D-ring pad for greater comfort and tangle-free donning
- Universal size (L/XL) fits most

SKU	Side D-rings	Chest/Leg Strap	Special Features
P950QC/UGN	No	Quick-Connect	Comfort-touch back D-ring pad/ Belt loops
P950QC-4/UGN	No	Quick-Connect/ Tongue Buckle	Comfort-touch back D-ring pad/ Belt loops
P950QC-7/UGN	Yes	Quick-Connect	Comfort-touch back D-ring pad/ Belt loops
P950QC-77/UGN	Yes	Quick-Connect	Comfort-touch back D-ring pad/ Belt loops /Removable waist belt

Greater comfort, less fatigue



P950QC/UGN

MILLER by Honeywell

Call Customer Care at 888 212-7233.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

BODY WEAR

Stretchable webbing



E650QC-7/UGN

Miller DuraFlex Ultra™ Harness

- Designed with patented DuraFlex® stretchable webbing for greater comfort, safety and productivity
- Quick-connect buckles on the chest and leg straps for easy donning; specially-woven, breathable, comfort-touch back D-ring pad for greater comfort and tangle-free donning
- Includes friction buckle shoulder straps and belt loops to accommodate a tool belt
- Universal size (L/XL) fits most

SKU	Side D-rings	Chest/Leg Strap	Special Features
E650QC/UGN	No	Quick-Connect	Comfort-touch back D-ring pad/Belt loops
E650QC-7/UGN	Yes	Quick-Connect	Comfort-touch back D-ring pad/Belt loops
E650QC-77/UGN	Yes	Quick-Connect	Comfort-touch back D-ring pad / Belt loops / Removable waist belt



Wrap-around comfort

P950-4/UGN

Miller DuraFlex Python® Harness

Enabled Safety Product

- Feature wrap-around comfort with cushioned tubular webbing in the upper torso that reduces neck irritation and shoulder stress when wearing a tool belt
- DuraFlex® stretchable webbing in lower torso straps moves with the body for greater flexibility, mobility and less fatigue
- Includes friction buckle shoulder straps and belt loops to accommodate a tool belt
- Universal size (L/XL) fits most

SKU	Side D-rings	Leg Strap	Chest Strap	Special Features
P950/UGN	No	Mating	Mating	Santoprene® D-ring back pad / Pull-free lanyard rings / Belt loops
P950-4/UGN	No	Tongue	Mating	Santoprene® D-ring back pad / Pull-free lanyard rings / Belt loops
P950-7/UGN	Yes	Mating	Mating	Santoprene® D-ring back pad / Pull-free lanyard rings / Belt loops
P950-58/UGN	Yes	Tongue	Mating	Santoprene® D-ring back pad / Pull-free lanyard rings / Belt loops
P950-77/UGN	Yes	Tongue	Mating	Santoprene® D-ring back pad / Pull-free lanyard rings / Belt loops Removable tool belt /6-in. back pad

Comfort and mobility



E650-7/UGN

Miller DuraFlex® Stretchable Harness

Enabled Safety Product

- Features specially-formulated stretch webbing to provide greater comfort, safety and mobility
- Pull-free lanyard rings (2) allow user to attach lanyard when not in use
- Belt loops to accommodate a tool belt
- Universal size (L/XL) fits most

SKU	Side D-rings	Leg Strap	Chest Strap	Special Features
E650/UGN	No	Mating	Mating	Pull-up adjustment / Pull-free lanyard rings / Belt loops
E650-4/UGN	No	Tongue	Mating	Pull-up adjustment / Pull-free lanyard rings / Belt loops
E650-7/UGN	Yes	Mating	Mating	Pull-up adjustment / Pull-free lanyard rings / Belt loops
E650-58/UGN	Yes	Tongue	Mating	Pull-up adjustment / Pull-free lanyard rings / Belt loops
E552/UGN	Yes	Mating	Mating	Pull-free lanyard rings / Front D-ring

MILLER® by Honeywell

BODY WEAR

Miller HP™ (High Performance) Non-Stretch Harness

- Lightweight and economical harness for light construction, general industry, painting and maintenance applications
- Comfort-touch back D-ring pad
- Tangle-free donning
- Universal size (L/XL) fits most

Enabled Safety Product

SKU	Side D-rings	Leg Strap	Chest Strap	Special Features
650T/UGK	No	Mating	Mating	Pull-free lanyard rings / Belt loops
650T-4/UGK	No	Tongue	Mating	Pull-free lanyard rings / Belt loops
650T-7/UGK	Yes	Mating	Mating	Pull-free lanyard rings / Belt loops
650T-58/UGK	Yes	Tongue	Mating	Pull-free lanyard rings / Belt loops
552T-4/UGK	Yes	Mating	_	Pull-free lanyard rings / Front D-ring



Extended-wear comfort

650T-58/UGK

BODY WEAR – ACCESSORY

Miller Relief Step™ Safety Device

- Alleviates the effects of orthostatic intolerance, also known as suspension trauma
- When used after a fall, provides support and enhances blood circulation until rescue – permitting the ability to move and flex leg muscles
- Small and lightweight; attaches to any brand full-body harness
- Utilizing two (2) Relief Steps (one for each leg/foot) assures greater comfort until rescue is completed

SKU	Description
9099X/12	Consists of a box of 12 Relief Step Safety Devices
9099/36BULK	36 Relief Step Safety Devices in bulk quantity



Help prevent suspension trauma

CONNECTING DEVICES

Miller Positioning Assembly

SKU	Description
6756RS/	Rebar chain assembly with two locking snap hooks and one locking rebar hook; swivel attachment and length adjuster

Note: Locking Snap Hook – 3/4-in. (19 mm) gate opening;
Locking Rebar Hook – 2-1/2-in. (64 mm) gate opening



6756RS/

MILLER by Honeywell


Call Customer Care at 888 212-7233.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

CONNECTING DEVICES



216WLS/6FTYL

Built-in shock absorber



231WRS/6FTYL

Miller Manyard® Shock-Absorbing Lanyard

Enabled Safety Product

- 6 ft. (1.8 m) web tubular lanyards with a built-in shock-absorbing inner core that smoothly expands to reduce fall arrest forces
- Heavy duty tubular web outer jacket serves as a back-up lanyard for added safety
- Unique warning flag indicates unit has been involved in a fall and should be removed from service
- Maximum work load 310 lbs (141 kg)

SKU	Number of Legs	Harness Connection	Anchorage Connection
216WLS/6FTYL	One	Locking snap hook	Locking snap hook
219WRS/6FTYL	One	Locking snap hook	Locking rebar hook
231WRS/6FTYL	Two	Locking snap hook	Locking rebar hooks
232WLS/6FTYL	Two	Locking snap hook	Locking snap hooks

Reduces Tripping Hazard

Contracts 6 ft. to 4 ft., Manyard® II lanyards greatly reduce the chances of tripping, snagging, or dragging. Meets all applicable OSHA, ANSI and CSA standards.



216M/6FTGN

Miller Manyard® II Shock-Absorbing Lanyard

Enabled Safety Product

- Contracts 6 ft. to 4 ft. (1.8 m to 1.2 m), greatly reducing the chances of tripping, snagging or dragging
- Specially-woven shock-absorbing inner core smoothly expands to reduce fall arrest forces
- Heavy-duty tubular web outer jacket serves as a wear indicator and back-up strap to the red inner core for added safety
- Working load of 310 lbs. (141 kg) and features a warning flag to indicate that it has arrested a fall

SKU	Number of Legs	Harness Connection	Anchorage Connection
216M/6FTGN	One	Locking snap hook	Locking snap hook
219M/6FTGN	One	Locking snap hook	Locking rebar hook
231M/6FTGN	Two	Locking snap hook	Locking rebar hooks

MILLER® by Honeywell

Call Customer Care at 888 212-7233.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

Miller Manyard HP™ Shock-Absorbing Lanyard

- 6 ft. (1.8 m) web tubular lanyards with a built-in shock-absorbing inner core that smoothly expands to reduce fall arrest forces
- Heavy duty tubular web outer jacket serves as a back-up lanyard for added safety
- Unique warning flag indicates unit has been involved in a fall and should be removed from service
- Maximum work load 310 lbs (141 kg)

Enabled Safety Product

SKU	Number of Legs	Harness Connection	Anchorage Connection
216TWLS/6FTGN	One	Locking snap hook	Locking snap hook
219TWLR/6FTGN	One	Locking snap hook	Locking rebar hook
231TWLR/6FTGN	Two	Locking snap hook	Locking rebar hooks
232TWLS/6FTGN	Two	Locking snap hook	Locking snap hooks

Shock-absorbing inner core



216TWLS/6FTGN

Miller HP™ Lanyard with SofStop® Shock Absorber

- 6 ft. (1.8 m) web lanyard with a SofStop shock absorber pack is designed with a specially-woven inner core that smoothly expands to reduce fall arrest forces
- Includes heavy-duty back up safety strap

SKU	Number of Legs	Harness Connection	Anchorage Connection	Special Features
910TWLS/6FTGK	One	Locking snap hook	Locking snap hook	Adjustable
913TWLS/6FTGK	One	Locking snap hook	Locking snap hook	-------
8798T/6FTGN	Two	Locking snap hook	Locking snap hooks	-------
8798TR/6FTGN	Two	Locking snap hook	Locking rebar hooks	-------

Smoothly expands to reduce forces



913TWLS/6FTGN

Miller StretchStop® Lanyard with SofStop® Shock Absorber

- Contracts 6 ft. to 4 ft. (1.8 m to 1.2 m), greatly reducing the chances of tripping, snagging or dragging
- SofStop shock absorber pack is designed with a special woven inner core that smoothly expands to reduce fall arrest forces
- Heavy duty tubular web outer jacket serves as a back-up lanyard for added safety

SKU	Number of Legs	Harness Connection	Anchorage Connection
913SS/6FTGN	One	Locking snap hook	Locking snap hook
913RSS/6FTGN	One	Locking snap hook	Locking rebar hook
8798SS/6FTGN	Two	Locking snap hook	Locking snap hooks
8798RSS/6FTGN	Two	Locking snap hook	Locking rebar hooks

Reduces tripping hazard



913SS/6FTGN

MILLER by Honeywell

Call Customer Care at 888 212-7233.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

CONNECTING DEVICES

BackBiter® lanyard and T-BAK™ PFL offers the ultimate in tie-back safety.

The webbing and snap hooks of regular lanyards are not designed to withstand the rigors of tying back. The innovative BackBiter® Tie-Back Lanyard and T-BAK™ Tie-Back PFL were designed from top to bottom for tie-back use.



913B/6FTGNC

Miller BackBiter® Tie-Back Lanyards

- All-in-one 6 ft. (1.8 m) lanyard with SofStop® shock absorber and cross-arm anchorage connector
- Unique Miller 5K® snap hook with 5,000 lbs. (22 kN) gate load capacity from any angle for greater safety
- Heavy-duty webbing with 5-times more abrasion resistance
- SofStop® shock absorber pack is designed with a special woven inner core that smoothly expands to reduce fall arrest forces
- Heavy duty tubular web outer jacket serves as a back-up lanyard for added safety

SKU	Number of Legs	Harness	Anchorage
913B/6FTGNC	One	Locking snap hook	Locking 5K snap hook
8798B/6FTGNC	Two	Locking snap hooks	Locking 5K snap hook



MFLT-1/7.5FT

MFLTB-1/7.5FT

Miller Turbo T-BAK™ Personal Fall Limiter

- The first and only retractable designed to tie-back anywhere along the lifeline
- Cost-effective alternative to tie-back, shock-absorbing lanyards
- All-in-one design – 7.5 ft. (2.3 m) working capacity and anchorage connector
- Designed for anchoring below a user's harness back D-ring for greater safety
- Integrated shock absorber with load indicator
- Rated for up to a 400 lb. (181.4 kg) worker
- The Miller Turbo T-BAK Fall Protection System easily adapts two units for 100% tie-off fall protection

SKU	Description and Unit Connector
Miller Turbo T-BAK™ Personal Fall Limiter	
MFLT-1/7.5FT	Turbo T-BAK without unit connector
MFLT-2/7.5FT	Turbo T-BAK with a 17D-1 steel twist-lock carabiner
MFLT-3/7.5FT	Turbo T-BAK with a 17D-2 lightweight, aluminum twist-lock carabiner
MFLT-4/7.5FT	Turbo T-BAK with a locking snap hook with 3/4-in. (19 mm) gate opening
Miller Turbo T-BAK™ Fall Protection System	
MFLTB-1/7.5FT	Twin Turbo D-ring Connector with two (2) MFLT-1/7.5FT Turbo T-BAK units

MILLER®
by Honeywell

Call Customer Care at 888 212-7233.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

New patent-pending Twin Turbo™ D-Ring connector easily adapts two lightweight TurboLite™ personal fall limiters (PFLs) for continuous 100% tie-off fall protection.

An Effective Solution When Working with Low Fall Clearance

Miller TurboLite™ Personal Fall Limiter and Twin Turbo™ Fall Protection System

The cost-effective and competitive pricing of the new Miller TurboLite Personal Fall Limiters will make shock-absorbing lanyards obsolete on the jobsite. Workers will no longer need to "switch-out" equipment to maintain a safe fall distance.

Enabled Safety Product

**Miller TurboLite™ PFL*

- First affordable alternative to shock-absorbing lanyards
- Extremely compact and lightweight provides 6 ft. (1.8 m) working capacity; unit attaches directly to the harness back D-ring for greater mobility and versatility
- Engineered webbing for greater abrasion resistance and long service life
- High-strength, impact-resistant nylon housing for maximum durability
- Built-in swivel prevents lifeline from twisting
- Rated for up to a 400 lb. user (181.4 kg)
- Meets all applicable OSHA, ANSI A10.32 and CSA standards

SKU	Description and Unit Connector	Lanyard End Connector
***Miller TurboLite™ PFL**		
MFL-1/6FT	TurboLite with Steel Twist-Lock Carabiner	Locking Snap Hook
MFL-2/6FT	TurboLite with Steel Twist-Lock Carabiner	Locking Rebar Hook
MFL-9/6FT	TurboLite with Locking Snap Hook	Locking Snap Hook
MFL-10/6FT	TurboLite with Locking Snap Hook	Locking Rebar Hook
MFL-11/6FT	TurboLite with Aluminum Twist-Lock Carabiner	Aluminum Locking Snap Hook
MFL-12/6FT	TurboLite with Aluminum Twist-Lock Carabiner	Aluminum Locking Rebar Hook
Miller Twin Turbo™ Fall Protection System		
MFLB-3/6FT	Twin Turbo D-Ring Connector & Locking Snap Hooks two (2) MFL-3/6FT TurboLite PFLs	
MFLB-4/6FT	Twin Turbo D-Ring Connector & Locking Rebar Hooks two (2) MFL-4/6FT TurboLite PFLs	
MFLB-11/6FT	Twin Turbo D-Ring Connector & Aluminum Locking Snap Hooks two (2) MFL-11/6FT TurboLite PFLs without carabiners	
MFLB-12/6FT	Twin Turbo D-Ring Connector &Aluminum Locking Rebar Hooks two (2) MFL-12/6FT TurboLite PFLs without carabiners	



MFL-1/6FT

2008 Plant Engineering PRODUCT of the YEAR Gold Award

OH&S OCCUPATIONAL HEALTH & SAFETY NEW PRODUCT OF THE YEAR



MFLB-12/6FT



MILLER by Honeywell

Call Customer Care at 888 212-7233.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

CONNECTING DEVICES

Small, lightweight cable lifeline



CFL-4/9FT

Miller Black Rhino™ Cable Self-Retracting Lifelines

- Lightweight, 9 ft. (2.7 m) self-retracting lifeline
- Designed with stainless steel wire rope to endure the daily rigors of harsh environments
- Quick-activating, high-strength stainless steel braking system – arrests free falls, providing a quick, safe rescue
- Integral load indicator indicates when the unit must be removed from service and returned for repair
- Rated for up to a 310 lb. (140.6 kg) worker

SKU	Unit Connector	Lanyard End Connector
CFL-2/9FT	Steel twist-lock carabiner	Locking swivel snap hook with load indicator
CFL-4/9FT	Stainless steel swivel and steel twist-lock carabiner	Locking swivel snap hook with load indicator
CFL-5/9FT	Stainless steel swivel and locking rebar hook	Locking swivel snap hook with load indicator
CFL-6/9FT	Stainless steel swivel and steel twist-lock carabiner	Locking rebar snap hook

An Affordable Alternative to Shock-Absorbing Lanyards

The lightweight, compact design of the 9 ft. Miller Scorpion™ Personal Fall Limiter requires less fall clearance, offers greater mobility and reduces tripping hazards. Meets all applicable OSHA, ANSI and CSA standards.



PFL-4/9FT

Miller Scorpion™ Personal Fall Limiters

- Lightweight and compact design; 9 ft. (2.7 m) web lifeline
- Dual operation: attach directly to harness back D-ring or use as traditional retractable lifeline
- Quick-activating, high-strength stainless steel braking system – arrests free falls, providing a quick, safe rescue
- Visual load indicator indicates the unit must be removed from service

SKU	Unit Connector	Lanyard End Connector
PFL-2/9FT	Miller Scorpion w/steel twist-lock carabiner	Locking snap hook
PFL-4/9FT	Miller Scorpion w/carabiner and swivel shackle	Locking snap hook
PFL-5/9FT	Miller Scorpion w/D-ring swivel hook	Locking snap hook
PFL-6/9FT	Miller Scorpion w/rebar hook and swivel shackle	Locking snap hook

MILLER®
by Honeywell

Call Customer Care at 888 212-7233.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

CONNECTING DEVICES

Miller MiniLite® Fall Limiter

- Compact, 11 ft. (3.3 m) retractable web lanyard with quick activating brake system limits free falls
- Corrosion-resistant, stainless steel interior components with high-impact thermoplastic housing
- Ideal for general plant maintenance, aerial or fork lifts, cherry pickers, bucket trucks, scaffold and steel erection
- Visual load indicator identifies when a unit has been involved in a fall
- Maximum work load 310 lbs. (141 kg)

SKU	Unit Connector	Lanyard End Connector
FL11-0/11FT	N/A	Locking swivel snap hook
FL11-1/11FT	Steel twist-lock carabiner	Locking snap hook
FL11-3/11FT	Steel twist-lock carabiner & swivel shackle	Locking snap hook
FL11-6/11FT	Rebar hook & swivel shackle	Locking snap hook
FL11-8/11FT	Locking snap hook & swivel shackle	Locking snap hook



Compact 11-ft. working capacity

FL11-1/11FT

Miller Falcon™ Self-Retracting Lifelines

- High impact-resistant nylon housing withstands the harsh rigors of the toughest applications
- Corrosion-resistant stainless steel and aluminum internal components extend service life and reduce replacement costs
- Dual-swivels (unit top and snap hook) included on all cable models to minimize lifeline from twisting during use
- Unique side payout design reduces wear on the entry bushing and cable for smooth operation with less drag

SKU	Description	Length
MP16P/16FT	Miller Falcon web lifeline w/stainless steel swivel, carabiner and locking snap hook	16 ft. (5 m)
MP20P/20FT	Miller Falcon web lifeline w/stainless steel swivel, carabiner and locking snap hook	20 ft. (6 m)
MP20G/20FT	Miller Falcon galvanized wire rope w/tagline & carabiner	20 ft. (6 m)
MP30G/30FT	Miller Falcon galvanized wire rope w/tagline & carabiner	30 ft. (10 m)
MP50G/50FT	Miller Falcon galvanized wire rope w/tagline & carabiner	50 ft. (15 m)
MP65G/65FT	Miller Falcon galvanized wire rope w/tagline & carabiner	65 ft. (20 m)



Lifetime housing guarantee

MP30G/30FT

MP20P/20FT

MILLER by Honeywell

Call Customer Care at 888 212-7233.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

CONNECTING DEVICES



Extended service life

RL20P/20FT



RL65G/65FT

Miller MightyLite™ Self-Retracting Lifelines

- Corrosion-resistant stainless steel and aluminum components extend service life
- Double-swivel design prevents lifeline from twisting and kinking
- Narrow payout port prevents intrusion of dirt and debris
- No annual factory recertification required, keeping units on the jobsite for increased productivity
- Carabiner for attaching to anchorage and tagline included

SKU	Description	Length
RL20P/20FT	1-in. (25 mm) polyester webbing; tagline and carabiner	20 ft. (6 m)
RL20G/20FT	3/16-in. (5 mm) galvanized wire rope; tagline and carabiner	20 ft. (6 m)
RL20SS/20FT	3/16-in. (5 mm) stainless steel wire rope; tagline and carabiner	20 ft. (6 m)
RLS30G/30FT	3/16-in. (5 mm) galvanized wire rope; tagline and carabiner	30 ft. (9 m)
RLS30S/30FT	3/16-in. (5 mm) stainless steel wire rope; tagline and carabiner	30 ft. (9 m)
RL50SS/50FT	3/16-in. (5 mm) stainless steel wire rope; tagline and carabiner	50 ft. (15 m)
RL65G/65FT	3/16-in. (5 mm) galvanized cable; tagline and carabiner	65 ft. (20 m)



8174/C



300L/50FTBL

Rope Grabs and Lifelines

Enabled Safety Product

SKU	Description
8174/C	Manual rope grab – Stainless steel manual rope grab w/anti-panic feature for use with 5/8-in. (16 mm) or 3/4-in. (19 mm) synthetic rope
8175/C	Trailing Rope Grab – Stainless steel trailing rope grab w/anti-panic feature for use with 5/8-in. (16 mm) rope
300L/50FTBL	Polypropylene blend rope lifeline with locking snap hook and loop; 5/8-in. (16 mm) diameter; 50 ft. (15 m)

**Miller rope-grabs are only approved for use with Miller ropes*

ANCHORAGE CONNECTORS



8183/6FTGN



9065/BK



RA30-1



17D-1



496/

Temporary Anchorage Connectors

Enabled Safety Product

**Cross-Arm Strap 8183/6FTGN*

SKU	Description
17D-1/	Steel twist-lock carabiner; 1-in. (25 mm) gate opening
18D-1/	Large, steel twist-lock carabiner; 2-in. (51 mm) gate opening
18D-2/	Large, aluminum twist-lock carabiner; 2-1/4-in. (57 mm) gate opening
RA30-1/	Reusable chain with 'O' ring; steep-pitched or flat roof
*8183/6FTGN	6 ft. (1.8 m) web Cross-Arm Strap wraps around I-beams and other structures and attaches with a 2-in. (51 mm) D-ring that slips through a 3-in. (76 mm) D-ring
9065/BK	Lightweight Beam Trolley adjusts to fit beam flanges from 3-in. (76 mm) to 4-1/2-in. (114 mm) wide. Adjustable trolley slides along with the worker to provide maximum mobility.
496/	Miller Grip™ portable/reusable anchorage supports 5,000 lb. (2,268 kg) ultimate strength; for single user connection; 400 lbs. (181.4 kg) maximum capacity; color-coded green. Hole diameter – 3/4-in. (19 mm)

ANCHORAGE CONNECTORS

Temporary Anchorage Connectors (continued)	
8816-14/	Lightweight, adjustable ShadowLite™ Beam Anchor – high-strength aluminum and bronze; 4.2 lbs. (2 kg)
8815-12/	Lightweight, fixed Miller Shadow® Beam Anchor – stainless steel and high-strength aluminum 4-in. to 12-in. (102 mm to 305 mm)
470/	Connects to various approved anchorages including railings, small I-beams, angle iron and scaffolding. Squeeze the spring-loaded hook and slip the large opening over the approved structure



470/




8816-14/

Miller Fusion™ Roof Anchor Post


- Permanent or temporary solution for roof safety
- Versatile single-point anchor adapts to a wide range of roof designs
- Protects worker by maintaining a secure connection to the structure; protects the structure with a unique energy-absorbing load distribution system

SKU	Description	Designed to Accommodate
X10000	Standing Seam Roofing	Standing seam spacing from 11.75-in. to 17-in. (298 mm to 432 mm)
X10001	Standing Seam Roofing	Standing seam spacing from 11.75-in. to 21.25-in. (298 mm to 540 mm)
X10002	Standing Seam Roofing	Standing seam spacing from 11.75-in. to 24-in. (298 mm to 610 mm)
X10010	Metal Sheathing Roofing	Metal sheathing w/minimum thickness of 24 gauge (0.024-in / 0.61 mm)
X10011	Metal Sheathing Roofing	Metal sheathing w/minimum thickness of 24 gauge (0.024-in / 0.61 mm). Trapezoidal spacing of 8-in. (203 mm) to 20-in. (508 mm) in one-inch (25.4 mm) increments
X10030	Membrane/Built-up Roofing	Fastens through membrane, insulation and into metal sheathing, wood sheathing or concrete with a combined thickness of up to 5.5-in. (140 mm)
X10031	Membrane/Built-up Roofing	Fastens through membrane, insulation and into metal sheathing, wood sheathing or concrete with a combined thickness of > 5.5-in. (140 mm) up to 10.5-in. (267 mm)
X10020	Multi-Purpose Metal Sheathing, Wood and Concrete Roofing (no hardware included)	With Miller approved hardware, accommodates: Metal sheathing w/minimum thickness of 24 gauge (0.024-in / 0.61 mm); Trapezoidal spacing of 8-in. (203 mm) to 20-in. (508 mm) in one-inch (25.4 mm) increments; Plywood with minimun thickness of 5/8-in. (15.9 mm) CDX; Concrete decking with minimum thickness of 6.5-in. (165 mm) and minimum concrete compressive strength of 3000 PSI (20.7 MPa)

Note: Additional models available for wood sheathing, concrete roofing and multi-purpose applications

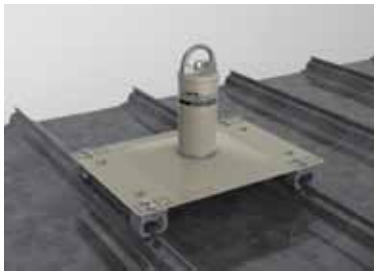

Standing Seam

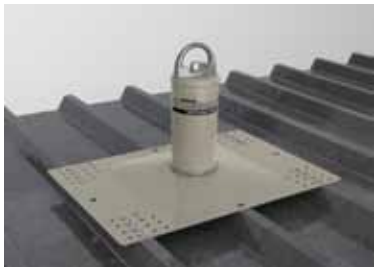

Metal Sheathing



Membrane

MILLER by Honeywell


Call Customer Care at 888 212-7233.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

ANCHORAGE CONNECTORS



RA40/

RA41/



RA45/



416/

Permanent Roof Anchors

SKU	Description
RA40/	Double D™ permanent roof anchor is designed to provide two (2) D-ring anchorage points when securely installed on a wood roof sub-surface ridge peak; complete with 8, 16d nails
RA41/	Single D™ permanent roof anchor is designed to provide one (1) D-ring anchorage point when securely installed on a wood roof sub-surface ridge peak or vertical wall; complete with 8, 16d nails
RA45/	The Claw™ permanent roof anchor is designed to provide a single anchorage point when securely installed on a wood rafter or truss member; fits wood sizes 2-in. x 4-in., 2-in. x 6-in., 2-in. x 8-in., 2-in. x 10-in. or 2-in. x 12-in.
416/	D-Bolt Anchor for up to 4-in. (102 mm) working thickness includes a 5/8-in. (16 mm) diameter bolt with lock washer and nut

HORIZONTAL LIFELINE SYSTEMS

Accommodates two workers



Miller TechLine™ Temporary Horizontal Lifeline System Kit

- Low-stretch rope lifeline for better performance/less deflection
- Lightweight kit; easy to carry
- Quick and easy to install for increased productivity
- Cross-arm anchorage straps for easy installation
- Connecting O-rings for greater mobility
- Shock absorber pack reduces fall arrest forces
- Designed so anchorage points only need to be rated for 5,000 lbs. (22 kN)
- Rope lifeline adjuster to accommodate required length
- Meets applicable OSHA, ANSI and CSA requirements
- Waterproof bucket for safe storage

SKU	Description
HLLR2/60FT	60 ft. (18 m) Rope Temporary HLL System for two workers



MILLER® by Honeywell

Call Customer Care at 888 212-7233.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

HORIZONTAL LIFELINE SYSTEMS

SkyGrip® Horizontal Lifeline systems are designed for easy installation on steel or concrete applications. A variety of innovative features have been engineered into these new systems, making them extremely user friendly with enhanced safety considerations. Maximize worker safety/productivity and minimize liability!

A New Dimension in Horizontal Lifeline Fall Arrest Technology

Miller SkyGrip™ Temporary Horizontal Lifeline System

- Systems available for steel and concrete applications
- Interchangeable stanchion posts enable systems for steel applications to be converted to concrete applications, and systems for concrete applications to be converted for steel applications
- Above the beam quick installation for increased safety
- Stainless steel energy absorber minimizes fall clearance
- Tension indicator ensures proper tensioning critical to knowing fall clearance
- Continuous pass-through design
- Lightweight and compact

SKU	Description
Systems for Steel Applications –	
Accommodates flanges 4 to 18 in. (.1 to .5 m) wide and up to 2-1/4 in. (57 mm) thick	
SGS18/60FT	60 ft. (18 m) single-span system accommodates up to 2 workers
SGS18/120FT	120 ft. (37 m) multi-span system accommodates up to 4 workers
Systems for Concrete Applications –	
Attaches to rebar, concrete inserts or expansion bolt anchors	
SGC/60FT	60 ft. (18 m) single-span system accommodates up to 2 workers
SGC/120FT	120 ft. (37 m) multi-span system accommodates up to 4 workers
Lifeline Kits	
SG416/60FT	60 ft. (18 m) Kit w/two 416 D-bolt anchors, accommodates up to 2 workers
SG8183-10/60FT	60 ft. (18 m) Kit w/two 10 ft (3 m) 8183 cross arm straps, accommodates up to 2 workers
SG8815-12/60FT	60 ft. (18 m) Kit w/two 8815-12 fixed beam anchors, accommodates up to 2 workers
System Components	
SGXK	Energy absorber kit includes energy absorber, tension indicator and 2 anchor shackles
Convert systems for concrete applications for use in steel applications	
SGSB18	Base to convert stanchions for concrete applications for use in steel applications (1 SGSB18 required for each stanchion)
Convert systems for steel applications for use in concrete applications	
SGCB	Base to convert stanchions for steel applications for use in concrete applications (1 SGCB required for each stanchion)
SGCA	Kit to convert system for steel applications for use in concrete applications (1 SGCA required for each system)

Note: Longer systems available that will accommodate up to six workers.

Maximum gripping power



SGS18/60FT



SGC/60FT

MILLER® by Honeywell

Call Customer Care at 888 212-7233.
Call Honeywell Technical Service at 800-873-5242 or visit www.millerfallprotection.com.

COLLECTIVE SAFETY AT HEIGHT SYSTEMS



EPIC ULTRA Barrier System
M3203 Mesh Barrier, M1140 Post with compatible base



EPIC Basic Barrier System
M1102 Post with compatible base and lumber

Miller EPIC™ Barrier Systems

Most commonly used in building construction and other elevated areas where workers are exposed to leading edges, the Miller EPIC Barrier Systems provide durable, reusable safety solutions for multiple workers. Engineered for quick and easy installation to reduce labor costs, the barriers are available in four (4) cost-effective safety systems.

- EPIC ULTRA Barrier System
- EPIC POST-N-Barrier System
- EPIC Basic Barrier System
- EPIC Stair Barrier System

SKU	Description
M3203	EPIC ULTRA Barrier – Tightly engineered steel mesh design; height adjustable. Maximum post spacing 8 ft. (2.4 m)
M1290	EPIC Multi-Foot Base – Used for horizontal surface applications, most commonly at the slab edge or for stair applications. The three points of support allow accurate installation on an uneven surface and ensure that the anchor load is correctly controlled. The Multi-Foot Base can be through-fitted using a variety of anchors appropriate to the base material. Hole size diameter 0.71-in. (18 mm) for fastening base
M1140	EPIC Adjustable Safety Post – Galvanized steel construction and designed with the Quiclox auto-locking mechanism to secure the post into the base making installation and dismantling quick and easy. Length 59.06-in. (1500 mm)

CONFINED SPACE & RESCUE/DESCENT



DuraHoist Portable Confined Space System



DuraHoist Portable Fall Arrest Post

Miller DuraHoist™ Safety Systems

Designed for manhole and confined space entry/retrieval and fall arrest applications. The modular design allows the use of components in various configurations and applications. Multiple winches and/or lifeline systems may be mounted as required. Lightweight, manageable components for easy storage, transport and set-up.

SKU	Description
DuraHoist™ Portable Confined Space System	
DH-1/	Four-piece system with ManHandler hoist/winch w/65-ft. (20 m) of 3/16-in. (5 mm) galvanized steel cable
DH-2/	Four-piece system without ManHandler hoist/winch
DuraHoist™ Portable Fall Arrest Post	
DH-AP-1/	Portable Fall Arrest Post
DH-AP-3/	Rescue/Material Handling Davit Arm
DH-AP-9/	Portable I-beam anchor base
Miller Winch and Hoist Mounting Brackets	
8442/65FT	ManHandler® personnel-rated hoist w/65 ft. (20 m) of 3/16-in. (5 mm) galvanized steel cable
MR50GB/50FT	MightEvac® SRL w/50 ft. (15 m) of 3/16-in. (5 mm) galvanized wire rope, mounting bracket & carabiner
DH-19-MILLER/	Complete mounting bracket assembly required to mount a Miller ManHandler Hoist/Winch or a Miller MightEvac SRL
Miller Floor Mount Sleeve	
DH-7ZP/	Zinc-plated, mild steel floor mount sleeve – mounts to horizontal concrete or steel structures

CONFINED SPACE & RESCUE/DESCENT

Miller Tripod w/MightEvac® Self-Retracting Lifeline/ Emergency Retrieval Hoist

- Promotes quick and easy rescue with a 4:1 mechanical advantage (avg. speed of 25 ft. (7.6 m) per minute)
- 7 ft. (2 m) tripod; lightweight, high-strength aluminum construction; adjustable legs; safety chain; rubber skid pads/serrated edge tripod feet
- Corrosion-resistant stainless steel/aluminum components; 310 lb. (141 kg) capacity

SKU	Description
MR50GC/50FT	MightEvac w/50 ft. (15 m) of 3/16-in. (5 mm) galvanized wire rope; 7 ft. (2 m) tripod; mounting bracket, pulley, carabiner and two heavy-duty equipment bags
Build Your Own Miller Confined Space System	
51/7FT	7-ft. (2 m) high-strength aluminum tripod
51X/9FT	9-ft. (3 m) high-strength aluminum tripod
MR50GB/50FT	MightEvac Self Retracting Lifeline with 50-ft. (15 m) of 3/16-in. (5 mm) galvanized wire rope with mounting bracket and pulley
8442/65FT	ManHandler Hoist with 65-ft. (20 m) of 3/16-in. (5 mm) galvanized wire rope




MR50GC/50FT

Miller SafEscape® ELITE Controlled Descent/ Self-Rescue System

- Used for vertical and angular controlled descent from overhead cranes, towers, aerial lifts, oil derricks, platforms and other elevated work areas; approved for multiple descents
- Includes lifeline (specify length); rescue harness; cross arm strap anchorage connector / carabiner; retrieval yoke; and carrying bag

SKU	Description
SE/75FT	Miller SafEscape ELITE RDD; also includes anchor slings and rescue bag; 75 ft. (23 m)
SEHW/75FT	Miller SafEscape ELITE RDD w/Hoisting Wheel; also includes anchor slings and rescue bag; 75 ft. (23 m)





SEHW/75FT

CLIMBING AND FALL RESTRAINT

GlideLoc® Vertical Height Access Ladder System Kits

GlideLoc Ladder Systems provide an innovative solution for vertical climbing that is easy-to-use, requires minimal maintenance and provides superior safety. The easy-climb GlideLoc Systems offer hands-free safety at height that ultimately increases worker mobility, safety and productivity.

- Unique design keeps hands free for climbing
- Engineered for smooth operation for ascending/descending
- Durable construction for extended service life
- Accommodates multiple workers

Kits are available in aluminum, galvanized or stainless steel construction and come complete with GlideLoc rail, gated top end-stop, gated bottom end-stop, ladder attachment brackets, and hardware

SKU	Description
GG0030	30 ft. (9 m) GlideLoc system; requires 3 sections of 10 ft. (3 m) rail and 6 rung clamps
GG0050	50 ft. (15 m) GlideLoc system; requires 5 sections of 10 ft. (3 m) rail and 9 rung clamps
22697/	Comfort GlideLoc Fall Arrester – Locks into the rail in the event of a fall. Stainless steel and aluminum construction.
25805/	Universal II GlideLoc Fall Arrester – Can be removed from the rail anywhere along the system enabling transfer onto platforms. Stainless steel and aluminum construction



GG0050

MILLER® by Honeywell