FLASHLIGHTS - PELICAN LIMITED LIFETIME GUARANTEE OF EXCELLENCE
Pelican Products, Inc. guarantees its lights for a lifetime against breakage or defects in workmanship. This guarantee does not cover the lamp or batteries. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. For complete warranty details, see http://www.pelican.com/warranty. In Australia: www.pelican.com/warranty/australia.

REMOTE AREA LIGHTING SYSTEMS - PELICAN
1 YEAR LIMITED WARRANTY FOR RALS PRODUCTS
Pelican Products, Inc. guarantees to the original purchaser of its **RALS** products that its products will be free of defects in materials and workmanship for one year from the date of purchase. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. For complete warranty details, see http://www.pelican.com/warranty. In Australia: www.pelican.com/warranty/australia.

U.S.A.

CALIFORNIA
23215 Early Avenue
Torrance, CA 90505
Tel: 310.326.4700
800.473.5422
Fax: 310.326.3311
www.pelican.com

MASSACHUSETTS
147 North Main Street
South Deerfield, MA 01373
Tel: 800.542.7344
Fax: 413.665.8330
www.pelican.com

INTERNATIONAL

EUROPE, MIDDLE EAST AND AFRICA
Peli Products, S.L.U.
c/ Provença, 388, Planta 7
Barcelona, Spain, 08025
Tel: +34.934.674.999
Fax: +34.934.877.393
www.peli.com

JAPAN
Pelican Products K.K.
Nisso 22 Bldg 9F
1-11-10 Azabu Dai
Minato ward Tokyo
Japan 106-0041
Tel: +81.33.585.9100
Fax: +81.33.585.9109
www.pelican.com/jp

CANADA
Pelican Products ULC
10221-184th Street
Edmonton, Alberta
T5S 2J4, Canada
Tel: +780.481.6076
Fax: +780.481.9586
www.pelican.ca

AUSTRALIA
Pelican Products Pty Ltd
West Wing, Platinum Building, Suite 2.33
4 Rja Av
Erina NSW 2250
Tel: +612.4367.7022
Fax: +612.4367.7066
www.pelicanaustralia.com

CHINA
Pelican Products China Representative Office
Pine City Building, Room 1026
777 Zhaojiabang Road
Shanghai, China 200032
Tel: +86.21.64189685
Fax: +86.21.64189679
www.pelican.com/cn

KOREA
Pelican Products Korea Ltd
#909 Hyundai 41 Tower, #2616
917-9, Mok-dong, Yangchon-gu, Seoul, Korea 158-050
Tel: +82.2.6092.4700
Fax: +82.2.6739.4700
www.pelican.com/ko

INDIA and SOUTH ASIA (Bangladesh, Bhutan, Maldives, Nepal, Sri Lanka)
Pelican Products and Services India Pvt. Ltd.
GF 9&10, Augusta Point
Sector-53, Golf Course Road
Haryana, Gurgaon 122002, India
Tel: +91.124.4377227
Fax: +91.124.4049227
www.pelican.com

SE ASIA and rest of ASIA (Hong Kong, Macau, Taiwan, Pakistan)
No.777, Pine City Building ZhaoJiaBang Road
#10-26 XuHui District
Shanghai, China 200032
Phone: +86.21.64189685
Fax: +86.21.64189679
www.pelican.com


LATIN AMERICA
23215 Early Avenue
Torrance, California 90505 USA
Tel: +1.310.326.4700 x 1462
Fax: +1.310.325.5740
www.pelican.com

MIX
Paper from responsible sources
FSC® C005341

PELICAN™
©2017 Pelican Products, Inc. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates. Lexan® is a registered trademark of SABIC. iOS is a registered trademark of Apple, Inc. BLUETOOTH is a registered trademark of Bluetooth Sig, Inc. Android is a trademark of Google Inc. BLACK JACK™ is a trademark of 1445 Designs Corporation. 3M is a trademark of 3M Company

DISTRIBUTED BY:

Part No. 0030-000-200 JA/17

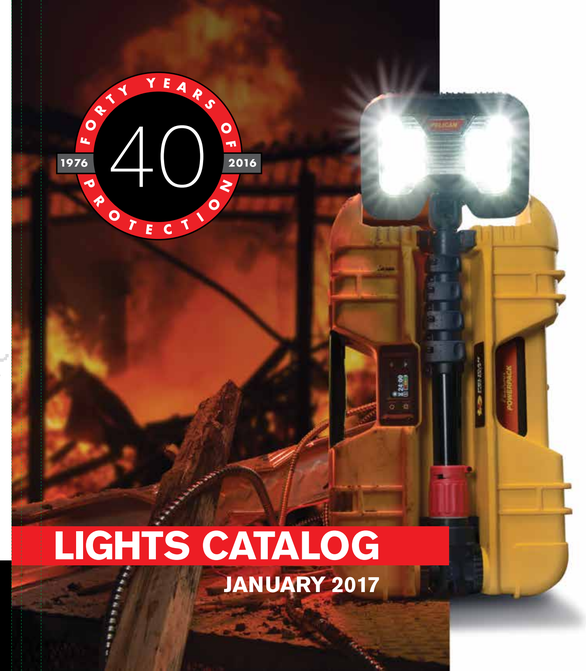

LIGHTS CATALOG

JANUARY 2017

REMOTE AREA LIGHTING SYSTEMS
SMALL LIGHTS
MEDIUM LIGHTS
LARGE LIGHTS
TACTICAL LIGHTS
HEADLAMPS
RIGHT ANGLE LIGHTS
DIVE LIGHTS
SPECIALTY LIGHTS

PELICAN™



DEAR CUSTOMER,

Lighting tools – they're a core element of every toolbox. They have a straightforward and simple purpose. Yet, when you're in a situation that requires a lighting tool, you want to make sure you have the right one. Pelican understands the critical importance of this tool. We provide a wide range of advanced lighting systems to support professionals, outdoor enthusiasts and everyday do-it-yourself hobbyists. Regardless of the purpose, our lighting tools and remote area lighting systems enable you to accomplish your tasks in a safer and more efficient manner.


With this perspective, Pelican relentlessly pursues innovation for new lighting tool products and manufacturing processes. We have adopted the ANSI FL-1 flashlight standards (see page 2) and continue to increase the number of industry leading safety certificates for specific models.

Our new lighting catalog features multiple technology advances. These include state of the art LED performance upgrades, new electronic features, upgraded safety certificates and enhanced packaging. We are committed to environmentally responsible manufacturing, in fact most of our lights use LED bulbs that help protect our planet. LEDs are long lasting, promote extended battery life and allow for the latest technological advancements.

From basic models to the high-performance 9410L LED Lantern (our brightest handheld flashlight to date) and the 9470 Remote Area Lighting System (which delivers 12,000 lumens), we are ready to provide world-class support for our dealers and end users across the globe. And, all of this comes with Pelican's industry-leading guarantee of excellence.

We invite you to look through our new catalog and discover the ideal lighting tools for your specific needs.

CEO and President
Lyndon Faulkner



MARKETS SERVED//

Fire
Military
Industrial
Law Enforcement
Outdoor
Consumer
Dive

REMOTE AREA LIGHTING SYSTEM PGS 04 - 07

9420XL | 9430 | 9435 | 9430SL | 9440 | 9500 | 9460 | 9460M | 9470 | 9470M | 9480 | 9490



SMALL LIGHTS PGS 08-09

1810 | 1830 | 1900 | 1910 | 1920 | 1930 | 1965 | 2140 | 2200 | 2300 | 2340



MEDIUM LIGHTS PGS 10 - 13

1800 | 1820 | 2000 | 2000PL | 2010 | 2010PL | 2020 | 2400 | 2400PL | 2410 | 2410PL | 2430 | 2450 | 2460 | 3310PL | 3310ELS | 3315 | 3315PL | 3315R | 3325



LARGE LIGHTS PGS 14 - 15

4000 | 9410L | 9415



TACTICAL LIGHTS PGS 16 - 17

2350 | 2360 | 2370 | 2380 | 2380R | 3330 | 7000 | 7060 | 7100 | 7600 | 8050 | 8060



HEADLAMPS PGS 18 - 21

2600 | 2610 | 2620 | 2640 | 2680 | 2690 | 2720 | 2740 | 2745 | 2750 | 2755 | 2760 | 2765 | 2780 | 2780R | 2785



RIGHT ANGLE LIGHTS PGS 22 - 25

2250 | 3315R-RA | 3610 | 3610PL | 3660 | 3700 | 3700PL | 3715 | 3715PL | 3750 | 3750PL | 3765 | 3765PL



DIVE LIGHTS PGS 26 - 27

1960N | 2010N | 2410N



SPECIALTY LIGHTS PGS 28 - 29

2130 | 2130IR | 2365 | 2490





PELICAN LIGHTING TOOLS: MORE THAN JUST FLASHLIGHTS.

Here are just a few features that make our lighting tools shine:



WIRELESS BLUETOOTH CONTROL
(on select models only)



SELF PROGRAMMABLE
(on select models only)



GESTURE ACTIVATION
(on select models only)



PHOTOLUMINESCENT DESIGNS
(on select models only)



BATTERY LEVEL INDICATION
(on select models only)



DOWNCAST LIGHTING FEATURES
(on select models only)



UNDERWATER APPLICATIONS
(on select models only)



LEGENDARY LIFETIME GUARANTEE



INTELLIGENT CONTROL
(on select models only)



TABLE + OF CONTENTS

Performance & Safety	2-3
Remote Area Lighting Systems	4-7
Small Lights	8-9
Medium Lights	10-13
Large Lights	14-15
Tactical Lights	16-17
Headlamps	18-21
Right Angle Lights	22-25
Dive Lights	26-27
Specialty Lights	28-29
Light Mounting Systems Holster and Holder Styles	30-31
Specifications	32-35
Custom Labels | Lighting Features	36-37

www.pelican.com

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)

PERFORMANCE

STANDARDS AND RATINGS
(Applicable to flashlights only)

LIGHT OUTPUT
Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.

BEAM DISTANCE
Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon "on a clear night in an open field").



WATER RESISTANT
Water Resistant – IPX4 Water splashed against the device from any direction shall have no harmful effects.

WATERPROOF/SUBMERSIBLE
Water Proof // IPX7 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time. **Submersible // IPX8** – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.

RUN TIME
Run Time is defined as the duration of time from the initial light output value – defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.

PEAK BEAM INTENSITY
Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.

ANSI STANDARDS □ (AMERICAN NATIONAL STANDARDS INSTITUTE)

Why create standards? While Pelican was one of the first manufacturers to use quantifiable test procedures, the need was recognized to develop a common language that customers could use to select the right flashlight for their specific needs. As a result, the American National Standards Institute (ANSI), with input from the flashlight industry, developed performance standards and symbols to effectively communicate a flashlight's features and benefits.

The Resulting ANSI/NEMA FL 1 Standards include the following six criteria.

GLOSSARY OF TERMS

Candela A unit of measurement of the intensity of light that is emitted by a light source in a particular direction.

Lux The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

Lumen A unit of measurement of the amount of brightness that comes from a light source. Lumens define "luminous flux," which is energy within the range of frequencies we perceive as light.

Integrating Sphere An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffuse with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

IP (Ingress Protection) – These ratings specify the environmental protection the enclosure provides. The IP rating normally has two numbers (IPXX).

The first number represents protection from solid objects or materials (dust) whereas the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids as described by the IP Rating System (Solids vary from 0-6 IP rating, Liquids vary from 0-8 IP rating).

Rechargeable Denotes a flashlight which contains rechargeable batteries and charging station. These models are shown with the rechargeable icon.



NEW DEEP MOUNT LED TECHNOLOGY

Our engineering team has designed a new high performance LED lamp module (Deep Mount LED Module). These lights are now brighter, with close to 100% increase in lumens and a 2.5 times increase in lux value over previous versions (as well as offering a more robust design).

A New deep dish reflector provides up to 2.5 times lux increase, and 100% lumen increase

B Robust, over-molded polycarbonate lens won't yellow

C Opti-mechanical design gathers and focuses 100% of the light

D LED is mounted directly to the PCB board, creating a strong and efficient design solution



SAFETY.

YOUR PASSPORT THROUGH HAZARDOUS LOCATIONS

Whether working in a **Class I** Oil Refinery or in the silo of a **Class III** Textile Mill, safety is always a concern and your lighting tool shouldn't add to your worries. Pelican builds lighting tools approved for any work environment. In fact we make more safety approved lights certified for **Class I II III Div. 1** and groups **ABCDEFG** than anyone else. To find the right light for your job visit us at Pelican.com/safety.

HAZARDOUS AREA ELECTRICAL GUIDELINES

	CLASSIFICATIONS	SUBSTANCE	TYPICAL ENVIRONMENTS
CLASS I	DIVISION 1 DIVISION 2	Flammable Gases, Vapors, or Liquids	Oil Refinery, Paint Warehouse Spray Booth, Offshore Oil Rig
CLASS II	DIVISION 1 DIVISION 2	Combustible Dusts	Coal Mine, Munitions Factory, Grain Silo, Hay Storage Facility
CLASS III	DIVISION 1 DIVISION 2	Ignitable Fibers & Flyings	Paper Mill, Woodworking Facility, Textile Mill, Cotton Gin

Division 1 (hazard likely): Where volatile substances can exist all of the time or some of the time under normal operating conditions.
Division 2 (hazard not likely): Where volatile substances are not likely to exist under normal operating conditions.



RALS
REMOTE AREA LIGHTING SYSTEMS

Providing increased performance, safer working conditions, emergency preparedness and greater flexibility, Pelican's RALS line is the modern alternative to generator based lighting:

- Silent performance
- No flammable fuel
- Eliminated trip hazards
- No exhaust fumes
- Remote activation

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)

9420XL RALS

LIGHT SOURCE LED
BATTERIES//Lithium ion
DIMENSIONS//29" (73.6 cm) Closed, 62" (157.4 cm) Deployed
MODES// High / Low
BEAM SPREAD// 58°, 2 LEDs per head

LUMENS 1000 UP TO
RUN TIME 4h




9430 RALS

LIGHT SOURCE//LED
BATTERIES//Sealed Lead Acid
DIMENSIONS//15.75" (40 cm) Closed, 32.28" (82 cm) Extended
MODES// High / Low
BEAM SPREAD// 125°, 6 LEDs

LUMENS 3000 UP TO
RUN TIME 15h



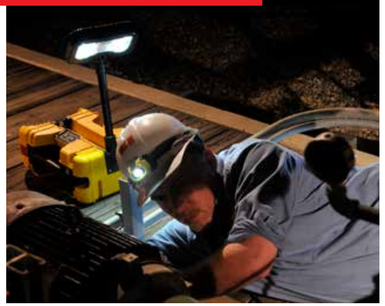

9430SL SPOT LIGHT RALS

LIGHT SOURCE//LED
BATTERIES//Sealed Lead Acid
DIMENSIONS//15.75" (40 cm) Closed, 32.28" (82 cm) Extended
MODES// High / Low
BEAM SPREAD// 10°, 24 LEDs

LUMENS 2000 UP TO
RUN TIME 15h



9435 SAFETY LIGHT RALS

LIGHT SOURCE//LED
BATTERIES//NiMH
DIMENSIONS//15.75" (40 cm) Closed, 32.28" (82 cm) Extended
MODES// High / Low
BEAM SPREAD// 90°, 18 LEDs
CERTIFICATIONS// CI, D2

SAFETY CERTIFIED
LUMENS 1500 UP TO
RUN TIME 10h



9440 RALS

LIGHT SOURCE//LED
BATTERIES//Lithium-Ion
DIMENSIONS//37.4" (95 cm) Closed, 85"(215.8 cm) Extended
MODES// High / Medium / Low
BEAM SPREAD// 120°, 10 LEDs

LUMENS 5300 UP TO
RUN TIME 8h

Bluetooth




9500 SHELTER LIGHTING SYSTEM

LIGHT SOURCE//LED
INPUT VOLTAGE//12 - 30vdc or 110-240vac
DIMENSIONS//20.62"(52.4 cm) Closed, 157.5" (399.9 cm) Extended
LIGHT OUTPUT// 6000 (White LED) Per Head, 1200 (Red LED) Per Head
BEAM SPREAD// 210° Diffused, 36 LEDs per head 24 White/12 Red, 3 lamp heads
PELICAN CASE// Included

LUMENS 6000 UP TO



Select between white light or red night vision mode

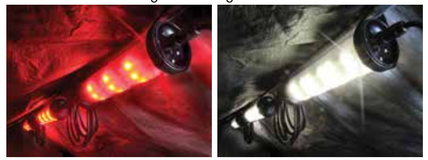

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)

REMOTE AREA **LIGHTING SYSTEMS**

9460/9460M RALS

LIGHT SOURCE// LED
BATTERIES// Sealed Lead Acid
DIMENSIONS// 23.25"(59.1 cm) Closed, 79.50" (201.9 cm) Deployed
MODES// Variable Light Output / Flashing / 3 Preset Levels
BEAM SPREAD// 120 °, 10 LEDs per head, 2 lamp heads

LUMENS 12000 OUTPUT
RUN TIME 24h



INTELLIGENT CONTROL SYSTEM calculates and displays current battery life, allowing the user to regulate the intensity of the light and choose the desired run time.



9460



9460M

9470/9470M RALS

LIGHT SOURCE// LED
BATTERIES// Sealed Lead Acid
DIMENSIONS// 24.75" (62.9 cm) Closed, 80.00"(208.3 cm) Deployed
MODES// Variable Light Output / Flashing / 3 Preset Levels
BEAM SPREAD// 120°, 10 LEDs per head, 4 lamp heads

LUMENS 24000 OUTPUT
RUN TIME 24h



INTELLIGENT CONTROL SYSTEM calculates and displays current battery life, allowing the user to regulate the intensity of the light and choose the desired run time.



9470



9470M

9460, 9460M, 9470, 9470M FEATURES



12V POWER SUPPLY WITH DUAL USB ADAPTER
12 volt power supply port can be used to power any electrical product that utilizes a standard 12v vehicle style connector (up to 4 amps) or a variety of USB connections.



BLUETOOTH™ CONTROL
Bluetooth app controls multiple units and variable light from 0-100% output. Free App for iOS™ and Android™.



MULTI-TERRAIN TROLLEY (ONLY ON 9460M, 9470M)
Large 1.5 inch polyurethane wheels allow for easier transport across rough surfaces. Molded feet level and stabilize case.

9480 RALS

LIGHT SOURCE// LED
BATTERIES// Sealed Lead Acid
DIMENSIONS// 15.50 (39.4 cm) Closed, 23.75" (60.3 cm) Deployed
MODES// High/ Medium / Low / Flashing
BEAM SPREAD// 125°, 8 LEDs

LUMENS 4000 OUTPUT
RUN TIME 28h



Bluetooth



SWAPPABLE POWER PACK
Swappable power pack w/12v aux. port adapter powers smartphones, laptops, etc.



BATTERY LEVEL INDICATOR
Full time battery level indication.

9490 RALS

LIGHT SOURCE// LED
BATTERIES// Sealed Lead Acid
DIMENSIONS// 20" (50.8 cm) Closed, 72" (182.9 cm) Deployed
MODES// High/ Medium / Low/ / Flashing / (6000-Variable)
BEAM SPREAD// 125°, 10 LEDs

LUMENS 6000 OUTPUT
RUN TIME 24h



INTELLIGENT CONTROL SYSTEM calculates and displays current battery life, allowing the user to regulate the intensity of the light and choose the desired run time.



Bluetooth



BLUETOOTH™ CONTROL
Bluetooth app controls multiple units and variable light from 0-100% output. Free App for iOS™ and Android™.





SMALL LIGHTS

When compact is a must or just a convenience, choose from Pelican's range of powerful lights. Whether composite or alloy, certified or colored, you'll find the perfect model for your next job.

1810

LIGHT SOURCE//
LED
BATTERIES//
4 LR 41 Alkaline (included)
LENGTH//
1.50" (3.8 cm)



LUMENS 16 RUN TIME 8h30m

L4™ 1830

LIGHT SOURCE//
LED
BATTERIES//
3 AAAA Alkaline (included)
LENGTH//
6.2" (15.7cm)
CERTIFICATIONS//
CI, D1



SAFETY CERTIFIED LUMENS 5 RUN TIME 32h

MITYLITE™ 1900

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
2 AAA Alkaline (included)
LENGTH//
4.09" (10.4cm)
CERTIFICATIONS//
CI, D1/CII, D2



SAFETY CERTIFIED LUMENS 11 RUN TIME 1h30m

1910

LIGHT SOURCE//
LED
BATTERIES//
1 AAA Alkaline (included)
LENGTH//
3.8" (9.7cm)
MODES//
High / Low



LUMENS 106 RUN TIME UP TO 4h

LUMENS 72 RUN TIME UP TO 4h

1920

LIGHT SOURCE//
LED
BATTERIES//
2 AAA Alkaline (included)
LENGTH//
5.5" (14.0cm)
MODES//
High / Low



LUMENS 224 RUN TIME UP TO 8h 45m

LUMENS 120 RUN TIME UP TO 8h 30m

L1™ 1930

LIGHT SOURCE//
LED
BATTERIES//
4 LR 44 Alkaline (included)
LENGTH//
2.64" (6.7cm)
CERTIFICATIONS//
CI, D1/CII, D2



SAFETY CERTIFIED LUMENS 12 RUN TIME 4h 15m

MITYLITE™ 1965

LIGHT SOURCE//
LED
BATTERIES//
2 AAA Alkaline (included)
LENGTH//
5.48" (13.9cm)
CERTIFICATIONS//
CI II III, D1



SAFETY CERTIFIED LUMENS 34 RUN TIME 3h 45m

TRACKER™ 2140

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
2 AAA Alkaline (included)
LENGTH//
3.5" (8.9 cm)
CERTIFICATIONS//
CI, D2



SAFETY CERTIFIED LUMENS 13 RUN TIME 2h

VB3™ 2220

LIGHT SOURCE//
LED
BATTERIES//
2 CR2032 Lithium (included)
LENGTH//
3.5" (8.9cm)
CERTIFICATIONS//
CI, D1



SAFETY CERTIFIED LUMENS 9 RUN TIME 34h

MITYLITE™ 2300

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
2 AA Alkaline (included)
LENGTH//
5.62" (14.3cm)
CERTIFICATIONS//
CI, D1/CII, D2



SAFETY CERTIFIED LUMENS 11 RUN TIME 4h 30m

MITYLITE™ 2340

LIGHT SOURCE//
Incandescent (Xenon)
BATTERIES//
2 AA Alkaline (not included)
LENGTH//
6.25" (15.9cm)
CERTIFICATIONS//
CI II, D2



SAFETY CERTIFIED LUMENS 10 RUN TIME 4h 30m





MEDIUM LIGHTS

Nothing beats the versatility of a hand-held light. Easy to carry, stash in a pocket, or clip to a helmet, these lights do just about everything. And when hazardous areas are present, you can count on Pelican's line of safety certified lighting tools. You'll even find photoluminescent models with "glow-in-the-dark" material to help you find your flashlight in an emergency.

PELILITE™ 1800

LIGHT SOURCE// Incandescent (Xenon)
BATTERIES// 2 C Alkaline (not included)
LENGTH// 6" (15.2cm)
CERTIFICATIONS// CI II, D2



SAFETY CERTIFIED — LUMENS 21 — RUN TIME 7h

POCKET SABRE™ 1820

LIGHT SOURCE// Incandescent (Xenon)
BATTERIES// 2 C Alkaline (included)
LENGTH// 5.83" (14.8cm)
CERTIFICATIONS// CI II III, D2



SAFETY CERTIFIED — LUMENS 22 — RUN TIME 6h 45m

SABRELITE™ 2000

LIGHT SOURCE// Incandescent (Xenon)
BATTERIES// 3 C Alkaline (not included)
LENGTH// 7.79" (19.8cm)
CERTIFICATIONS// CI, D1/CII, D2



SAFETY CERTIFIED — LUMENS 53 — RUN TIME 5h

SABRELITE™ 2000PL
PHOTOLUMINESCENT SHROUD

LIGHT SOURCE// Incandescent (Xenon)
BATTERIES// 3 C Alkaline (not included)
LENGTH// 7.79" (19.8cm)
CERTIFICATIONS// CI, D1/CII, D2



SAFETY CERTIFIED — LUMENS 53 — RUN TIME 5h

SABRELITE™ 2010

LIGHT SOURCE// LED
BATTERIES// 3 C Alkaline (not included)
LENGTH// 8.11" (20.6cm)
CERTIFICATIONS// CI II III, D1



SAFETY CERTIFIED — LUMENS 161 — RUN TIME 22h

SABRELITE™ 2010PL
PHOTOLUMINESCENT SHROUD

LIGHT SOURCE// LED
BATTERIES// 3 C Alkaline (not included)
LENGTH// 8.11" (20.6cm)
CERTIFICATIONS// CI II III, D1



SAFETY CERTIFIED — LUMENS 161 — RUN TIME 22h

SABRELITE™ 2020

LIGHT SOURCE// Recoil™ LED
BATTERIES// 3 C Alkaline (not included)
LENGTH// 8.75" (22.2cm)
CERTIFICATIONS// CI, D1



SAFETY CERTIFIED — LUMENS 75 — RUN TIME 6h 30m

STEALTHLITE™ 2400

LIGHT SOURCE// Incandescent (Xenon)
BATTERIES// 4 AA Alkaline (included)
LENGTH// 6.49" (16.5cm)
CERTIFICATIONS// CI, D1/CII, D2



SAFETY CERTIFIED — LUMENS 45 — RUN TIME 3h 45m

STEALTHLITE™ 2400PL
PHOTOLUMINESCENT SHROUD

LIGHT SOURCE// Incandescent (Xenon)
BATTERIES// 4 AA Alkaline (included)
LENGTH// 6.49" (16.5cm)
CERTIFICATIONS// CI D1, CII D2



SAFETY CERTIFIED — LUMENS 45 — RUN TIME 3h 45m

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)



STEALTHLITE™ 2450

LIGHT SOURCE// Incandescent (Xenon)
BATTERIES// NIMH (included)
LENGTH// 6.5" (16.5cm)
CERTIFICATIONS// CI II, D2



SAFETY CERTIFIED | LUMENS 35 | RUN TIME 3h 30m

STEALTHLITE™ 2410 LED

LIGHT SOURCE// LED
BATTERIES// 4 AA Alkaline (included)
LENGTH// 7" (17.8cm)
CERTIFICATIONS// CI II III, D1



SAFETY CERTIFIED | LUMENS 183 | RUN TIME 5h 45m

STEALTHLITE™ 2460

LIGHT SOURCE// LED
BATTERIES// NIMH (included)
LENGTH// 7" (17.8cm)
CERTIFICATIONS// CI II, D2



SAFETY CERTIFIED | LUMENS 183 | RUN TIME 5h

3315

LIGHT SOURCE// LED
BATTERIES// 3 AA Alkaline (included)
LENGTH// 6.14" (11.8cm)
CERTIFICATIONS// CI II III, D1



SAFETY CERTIFIED | LUMENS 160 | RUN TIME 19h

3315PL
PHOTOLUMINESCENT

LIGHT SOURCE// LED
BATTERIES// 3 AA Alkaline (included)
LENGTH// 6.14" (11.8cm)
CERTIFICATIONS// CI II III, D1
(Photoluminescent)



NEW

SAFETY CERTIFIED | LUMENS 160 | RUN TIME 19h

STEALTHLITE™ 2410PL
PHOTOLUMINESCENT SHROUD

LIGHT SOURCE// LED
BATTERIES// 4 AA Alkaline (included)
LENGTH// 7" (17.8cm)
CERTIFICATIONS// CI, I, III D1



SAFETY CERTIFIED | LUMENS 183 | RUN TIME 5h 45m

3310PL
PHOTOLUMINESCENT

LIGHT SOURCE// LED
BATTERIES// 3 AA Alkaline (included)
LENGTH// 6.14" (15.6cm)
MODES// High / Low / Flashing (flashlight body glows in the dark)
(Photoluminescent)



LUMENS 378 | RUN TIME UP TO 202h

3315R

LIGHT SOURCE// LED
BATTERIES// Lithium-Ion (included)
LENGTH// 6.11" (15.5cm)
CERTIFICATIONS// CI, D1



NEW

SAFETY CERTIFIED | LUMENS 132 | RUN TIME 34h

MITYLITE™ 2430

LIGHT SOURCE// Incandescent (Xenon)
BATTERIES// 4 AA Alkaline (included)
LENGTH// 6.50" (16.5cm)
CERTIFICATIONS// CI, D2



SAFETY CERTIFIED | LUMENS 70 | RUN TIME 2h 15m

3310 ELS (EMERGENCY LIGHTING SYSTEM)

LIGHT SOURCE// LED
BATTERIES// 3 AA Alkaline (included)
LENGTH// 6.14" (15.6cm)
INCLUDES// 3310PL and Wall Mountable Case (flashlight body glows in the dark)
(Photoluminescent)



LUMENS 378 | RUN TIME UP TO 202h

3325

LIGHT SOURCE// LED
BATTERIES// 3 AA Alkaline (included)
LENGTH// 6.06" (15.4cm)
CERTIFICATIONS// CI, D1, IECEx ia



NEW

SAFETY CERTIFIED | LUMENS 162 | RUN TIME 16h



SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)
PELICAN **LIGHTS CATALOG**

MEDIUM **LIGHTS**

LARGE LIGHTS

Colossal performance with lightweight designs. Features such as full time battery level indication, articulating light head and multiple light modes keep you in control of the job. Pelican is also a leader of high performance lithium-ion technology in portable lighting.

KINGLITE™ 4000

LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
8 D Alkaline (not included)

LENGTH//
9.37" (23.8cm)

CERTIFICATIONS//
CI II, D2



SAFETY CERTIFIED
LUMENS 249
RUN TIME 11h

9410L LED LANTERN

LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
8.75" (22.2 cm)

MODES//
High / Low / Flashing
Full Time Battery Indicator



LUMENS 1203
RUN TIME 10h 30m
up to

9415 LED LANTERN

LIGHT SOURCE//
LED

BATTERIES//
NIMH (included)

LENGTH//
8.75" (22.2cm)

CERTIFICATIONS//
CI, D1

MODES//
High / Low / Flashing
Full Time Battery Indicator



SAFETY CERTIFIED
LUMENS 413
RUN TIME 12h
up to

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)



SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)



TACTICAL LIGHTS

Pelican's tactical lights are field ready and built to withstand the hard knocks that come with the job. Intense, focused beams provides downrange visibility and peripheral lighting aids in situational awareness.

2350



LIGHT SOURCE//
LED

BATTERIES//
1 AA Alkaline (included)

LENGTH//
4.23" (10.7 cm)

MODES//
High/ Strobe / Low

■

LUMENS 178 | RUN TIME UP TO 21h

2360 LED



LIGHT SOURCE//
LED

BATTERIES//
2 AA Alkaline (included)

LENGTH//
6.2" (15.7cm)

MODES//
High/ Strobe/ Low

■

LUMENS 375 | RUN TIME UP TO 13h

2380R



LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
6.48"(16.5 cm)

MODES//
High / Strobe / Low
Spot To Flood

■

USB

LUMENS 305 | RUN TIME UP TO 25h

PM6 3330



LIGHT SOURCE//
LED

BATTERIES//
2 CR123 Lithium-Ion (included)

LENGTH//
5.27" (13.4cm)

■ ■

LUMENS 90 | RUN TIME 4h 45m

7100



LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
5.12" (13cm)

MODES//
High / Strobe / Medium / Low

PROGRAMMABLE//
5 Selectable Programs

■

NEW

USB

LUMENS 695 | RUN TIME UP TO 9h 15m

7600



LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
6.19" (15.7cm)

MODES//
High / Strobe / Medium / Low

LED COLORS//
White / Red / Green

PROGRAMMABLE//
5 Selectable Programs

■

NEW

USB

LUMENS 944 | RUN TIME UP TO 29h



2370



LIGHT SOURCE//
LED

BATTERIES//
2 AA Alkaline (included)

LENGTH//
6.43" (16.3cm)

MODES//
High / Low / Red / Blue

LIGHT COLORS//
White / Red / Blue

■

LUMENS 358 | RUN TIME 11h

2380



LIGHT SOURCE//
LED

BATTERIES//
2 AA Alkaline (included)

LENGTH//
6.44" (16.4cm)

MODES//
High / Low /
Spot To Flood

■

NEW

LUMENS 372 | RUN TIME UP TO 13h

7000



LIGHT SOURCE//
LED

BATTERIES//
2 CR123 Lithium-Ion

LENGTH//
5.31" (13.5 cm)

MODES//
High / Strobe / Medium / Low
Self Programmable

■

LUMENS 602 | RUN TIME UP TO 1h 30m

7060



LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
8.65" (22cm)

MODES//
High / Strobe / Medium / Low
Self Programmable

■

LUMENS 368 | RUN TIME UP TO 45h

M11 8050



LIGHT SOURCE//
Incandescent (Xenon)

BATTERIES//
NiMH (included)

LENGTH//
11.25" (28.6cm)

■ ■

LUMENS 164 | RUN TIME 2h 15m

8060



LIGHT SOURCE//
LED

BATTERIES//
NiMH (included)

LENGTH//
12.67" (32.2cm)

MODES//
High / Strobe / Medium / Low
Flashing / Self Programmable

■

LUMENS 803 | RUN TIME UP TO 69h



HEADLAMPS

With up to 500 lumens, revolutionary downcast lighting, USB charging and battery level indication, these headlamps are packed with features. Other options, including night vision friendly red illumination, interchangeable body colors and multiple settings, make these headlamps your best partner for the dark.

HEADSUP LITE™ 2600

LIGHT SOURCE//
Incandescent (Krypton)

BATTERIES//
4 AA Alkaline (included)

LENGTH//
3.81" (9.7cm)

CERTIFICATIONS//
CI II III, D2

■

SAFETY CERTIFIED | LUMENS 18 | RUN TIME 3h 30m



HEADSUP LITE™ 2610

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
1.49" (3.8cm)

CERTIFICATIONS//
CI, D1

MODES//
High / Low

■

SAFETY CERTIFIED | LUMENS 30 | RUN TIME UP TO 47h



HEADSUP LITE™ 2620

LIGHT SOURCE//
Incandescent (Xenon), LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.16" (5.5cm)

CERTIFICATIONS//
CI, D1

MODES//
High / Low

■

SAFETY CERTIFIED | LUMENS 26 | RUN TIME UP TO 18h



HEADSUP LITE™ 2640

LIGHT SOURCE//
Incandescent (Halogen), LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
2.63" (6.7cm)

CERTIFICATIONS//
CI, D2

MODES//
High / Low

■

SAFETY CERTIFIED | LUMENS 29 | RUN TIME UP TO 17h



HEADSUP LITE™ 2680

LIGHT SOURCE//
Recoil™ LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
4.64" (11.8cm)

CERTIFICATIONS//
CI II III, D2

■

SAFETY CERTIFIED | LUMENS 79 | RUN TIME 10h



HEADSUP LITE™ 2690

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.81" (7.1 cm)

CERTIFICATIONS//
CI II III, D1

■

SAFETY CERTIFIED | LUMENS 74 | RUN TIME 11h



2720 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.48" (6.3 cm)

MODES//
Variable Light Output / Spot to Flood / Red Night Vision Friendly LEDs

■

LUMENS 200 | RUN TIME UP TO 103h

GESTURE ACTIVATION CONTROL



2740 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.25" (5.7 cm)

MODES//
High / Low / Flashing / Red LED

■ ■ (Translucent Blue)

NEW

LUMENS 66 | RUN TIME UP TO 21h



SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)

2745 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.25" (5.7 cm)

CERTIFICATIONS//
CI, D1

MODES//
High / Low / Flashing



SAFETY CERTIFIED — LUMENS 33 — RUN TIME UP TO 40h

2750 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.25" (5.7 cm)

MODES//
High / Low / Flashing / Red LED / Low Battery Warning

(Photoluminescent)



LUMENS 193 — RUN TIME UP TO 11h

2755 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.25" (5.7 cm)

CERTIFICATIONS//
CI, D1

MODES//
High / Low / Flashing / Low Battery Warning



SAFETY CERTIFIED — LUMENS 72 — RUN TIME UP TO 15h

2780R HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
Lithium-Ion (included)

LENGTH//
3.00" (7.6 cm)

MODES//
High / Medium / Low / Flashing / Downcast/ Full-time Battery Level Indicator

(Photoluminescent)
3 Interchangeable Covers Included

NEW



LUMENS 558 — RUN TIME UP TO 7h 30m

2760 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.25" (5.7 cm)

MODES//
High / Medium / Low / Downcast / Flashing/ Red LED / Full-time Battery Level Indicator

(Translucent Red)



LUMENS 204 — RUN TIME UP TO 11h

2765 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
3 AAA Alkaline (included)

LENGTH//
2.25" (5.7 cm)

CERTIFICATIONS//
CI, D1

MODES//
High / Low / Flashing / Downcast



SAFETY CERTIFIED — LUMENS 105 — RUN TIME UP TO 9h

2780 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
3.00" (7.6 cm)

MODES//
High / Medium / Low / Flashing / Downcast/ Full-time Battery Level Indicator

(Photoluminescent)
3 Interchangeable Covers Included



LUMENS 430 — RUN TIME UP TO 12h

2785 HEADLAMP

LIGHT SOURCE//
LED

BATTERIES//
4 AA Alkaline (included)

LENGTH//
3.00" (7.6 cm)


CERTIFICATIONS//
CI D1

MODES//
High / Medium / Low / Flashing / Downcast

NEW



SAFETY CERTIFIED — LUMENS 226 — RUN TIME UP TO 66h

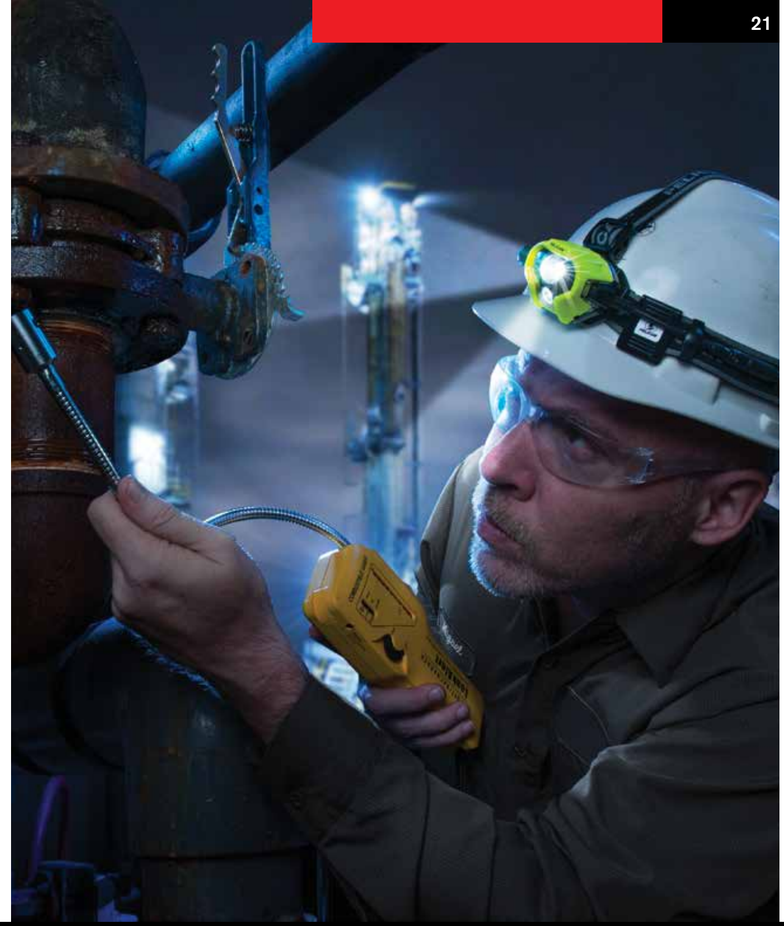

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)

PELICAN **LIGHTS CATALOG**



RIGHT ANGLE LIGHTS

Firefighters put everything on the line and the correct lighting tools are critical. Right angle (90°) flashlights often worn on turnout coats offer hands-free performance. With extreme peak beam intensity and smoke-cutting penetration, these lights will get you in and out of tough situations safely.

VERSABRITE™ 2250

LIGHT SOURCE// Incandescent (Xenon)
BATTERIES// 2 AA Alkaline (included)
LENGTH// 3.87" (9.8cm)
CERTIFICATIONS// CI II, D2



LUMENS 7 | RUN TIME 5h 30m

3315R-RA

LIGHT SOURCE// LED
BATTERIES// Lithium-Ion (included)
LENGTH// 6.11" (15.5cm)
CERTIFICATIONS// CI, D1



LUMENS 132 | RUN TIME 34h

LITTLE ED™ 3610

LIGHT SOURCE// LED
BATTERIES// 4 AA Alkaline (included)
LENGTH// 7.51" (19.1cm)
CERTIFICATIONS// CI II III, D1



LUMENS 183 | RUN TIME 5h 45m

LITTLE ED™ 3610PL
PHOTOLUMINESCENT SHROUD

LIGHT SOURCE// LED
BATTERIES// 4 AA Alkaline (included)
LENGTH// 7.51" (19.1cm)
CERTIFICATIONS// CI II III, D1



LUMENS 183 | RUN TIME 5h 45m

LITTLE ED™ 3660

LIGHT SOURCE// LED
BATTERIES// NiMH (included)
LENGTH// 7.51" (19.1cm)
CERTIFICATIONS// CI II, D2



LUMENS 183 | RUN TIME 5h

BIG ED™ 3700

LIGHT SOURCE// Incandescent (Krypton)
BATTERIES// 4 C Alkaline (not included)
LENGTH// 7" (17.8cm)
MODES// High / Backup
CERTIFICATIONS// CI, D2



LUMENS 39 UP TO | RUN TIME 8h 30m

BIG ED™ 3700PL
PHOTOLUMINESCENT SHROUD

LIGHT SOURCE// Incandescent (Krypton)
BATTERIES// 4 C Alkaline (not included)
LENGTH// 7" (17.8cm)
CERTIFICATIONS// CI, D2
MODES// High / Backup



LUMENS 39 UP TO | RUN TIME 8h 30m

3715

LIGHT SOURCE// LED
BATTERIES// 4 AA Alkaline (not included)
LENGTH// 5.36" (13.6cm)
CERTIFICATIONS// CI, D1
MODES// High / Low / Flashing / Downcast



LUMENS 233 UP TO | RUN TIME 31h

3715PL
PHOTOLUMINESCENT SHROUD

LIGHT SOURCE// LED
BATTERIES// 4 AA Alkaline (not included)
LENGTH// 5.36" (13.6cm)
CERTIFICATIONS// CI, D1
MODES// High / Low / Flashing / Downcast



LUMENS 233 UP TO | RUN TIME 31h

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)

RIGHT ANGLE **LIGHTS**



BIG ED™ 3750

LIGHT SOURCE//
Incandescent (Krypton)

BATTERIES//
NiCad (included)

LENGTH//
7" (17.8cm)

CERTIFICATIONS//
CI, D2

MODES//
High / Backup



SAFETY CERTIFIED — LUMENS 96 — RUN TIME UP TO 4h

BIG ED™ 3750PL
PHOTOLUMINESCENT SHROUD

LIGHT SOURCE//
Incandescent (Krypton)

BATTERIES//
NiCad (included)

LENGTH//
7" (17.8cm)

CERTIFICATIONS//
CI, D2

MODES//
High / Backup



SAFETY CERTIFIED — LUMENS 96 — RUN TIME UP TO 4h

3765

LIGHT SOURCE//
LED

BATTERIES//
NiMH (included)

LENGTH//
5.36" (13.6cm)

CERTIFICATIONS//
CI, D1(w/alkalines)/CI, D2

MODES//
High / Low / Flashing / Downcast



SAFETY CERTIFIED — LUMENS 237 — RUN TIME UP TO 20h

3765 PL
PHOTOLUMINESCENT SHROUD

LIGHT SOURCE//
LED

BATTERIES//
NiMH (included)

LENGTH//
5.36" (13.6cm)

CERTIFICATIONS//
CI, D1(w/alkalines)/CI, D2

MODES//
High / Low / Flashing / Downcast



SAFETY CERTIFIED — LUMENS 237 — RUN TIME UP TO 20h



DIVE LIGHTS

Whether you'll be exploring underwater caves and crevices during daylight hours or the exhilarating adventure of a night dive, Pelican's Nemo line of dive lights will fill your needs. Designed to support depths up to 100 meters and built Pelican tough, you'll appreciate the reliability these underwater tools provide.



NEMO™ 1960N
PHOTOLUMINESCENT SHROUD

LIGHT SOURCE//
LED
BATTERIES//
2 AAA Alkaline (included)
LENGTH//
5.48" (13.9cm)
SUBMERSIBLE//100 Meters



LUMENS 34
RUN TIME 3h 30m

NEMO™ 2010N
PHOTOLUMINESCENT SHROUD

LIGHT SOURCE//
LED
BATTERIES//
3 C Alkaline (not included)
LENGTH//
8.11" (20.6cm)
SUBMERSIBLE//
100 Meters




LUMENS 161
RUN TIME 22h

NEMO™ 2410N
PHOTOLUMINESCENT SHROUD

LIGHT SOURCE//
LED
BATTERIES//
4 AA Alkaline (included)
LENGTH//
7" (178cm)
SUBMERSIBLE//
100 Meters



LUMENS 183
RUN TIME 5h 45m

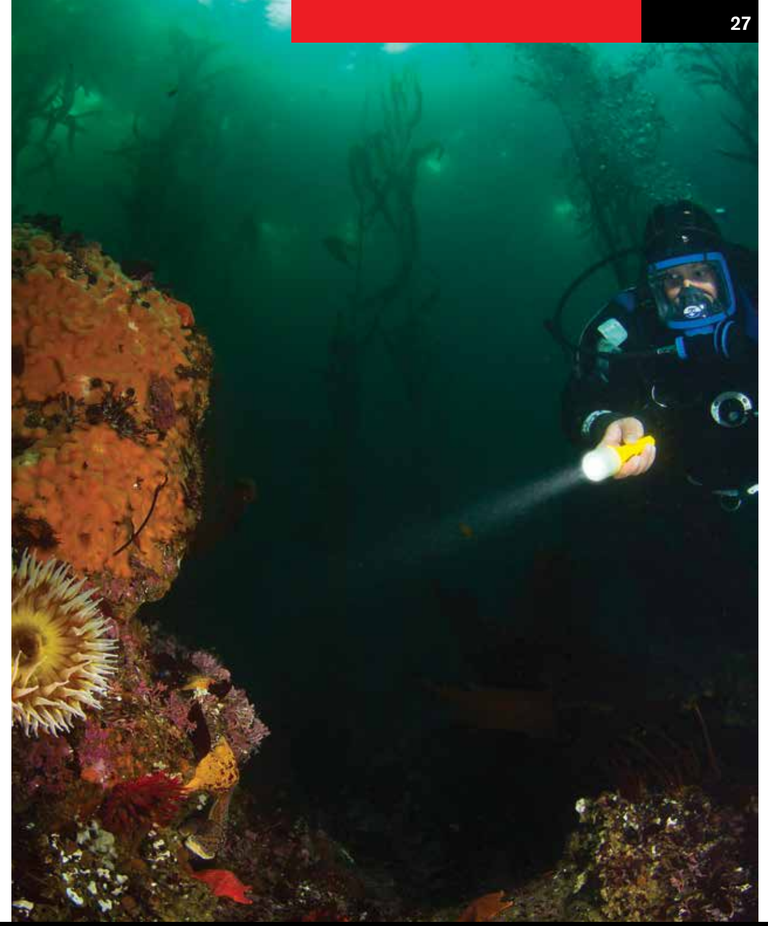

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)

DIVE **LIGHTS**



SPECIALTY LIGHTS

Whether directing fighter jets on the decks of aircraft carriers or protecting our troops with friend-or-foe infrared beacons, Pelican manufactures quality lighting tools for many unique military applications. Also available, magnetically secured flexible neck designs for mechanics and red LED flashers that are helpful in keeping workers safe.

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)

MINI FLASHER™ 2130

LIGHT SOURCE//
LED
BATTERIES//
2 L1154 Alkaline (included)
LENGTH//
1.73" (4.4 cm)



MINI FLASHER™ 2130IR

LIGHT SOURCE//
LED (infrared)
BATTERIES//
2 L1154 Alkaline (included)
LENGTH//
1.73" (4.4 cm)



2365 FLEX NECK

LIGHT SOURCE//
LED
BATTERIES//
2 AA Alkaline (not included)
LENGTH//
21.92" (55.7cm)

LUMENS 65
RUN TIME 7h



2490 (WITH TRAFFIC WAND)

LIGHT SOURCE//
LED
BATTERIES//
4 AA Alkaline (not included)
LENGTH//
12.5" (31.7 cm)

NEW



LUMENS 64
RUN TIME 12h



SPECIALTY **LIGHTS**

SEE SPECIFICATIONS CHART FOR ADDITIONAL LIGHT PERFORMANCE DATA | PERFORMANCE DATA IS TO FL 1 STANDARDS (APPLIES TO FLASHLIGHTS ONLY)

PELICAN **LIGHTS CATALOG**

LIGHT MOUNTING SYSTEMS





CAT. NO. **610**

FRONT SIGHT MOUNT
Fits Pelican Light 7000. Includes Remote Pressure Switch. For use with: AR15, M16, and M4 Carbine



CAT. NO. **630**

FOREGRIP MOUNT
Fits Pelican Light 7000. Includes Remote Pressure Switch. For use with: Heckler, and Koch MP5



CAT. NO. **620**

SIDE SLING MOUNT
Fits Pelican Light 7000. Includes Remote Pressure Switch. For use with: AR15, M16, and M4 Carbine




CAT. NO. **7006**

REMOTE PRESSURE SWITCH
Our tactical pressure switch replaces the standard tailcap on the flashlight. A 6" cord attached to a 2" pressure-sensitive switch mounts to the foregrip. Fits Pelican Light 7000 (Cat. No. 7006). COLOR: Black // WT.: 2.0 oz.

HOLSTER **STYLES** +

CAT NO.	CAT. NO. 2327 Nylon Holster	CAT. NO. 2357/2367 Nylon Holster	CAT. NO. 2377 Nylon Holster	CAT. NO. 2383 Nylon Holster	CAT. NO. 2407 Nylon Holster	CAT. NO. 7077 Plain Leather Holster	CAT. NO. 7078 Nylon Holster	CAT. NO. 7075 Basketweave Leather Holster	CAT. NO. 7106 Nylon Holster	CAT. NO. 7606 Nylon Holster	CAT. NO. 7607 Nylon Holster / Wand Kit	CAT. NO. 8057 Nylon Holster
2300	•											
2320	•											
2330	•											
2360		•										
2370			•									
2380			•									
2380R				•								
2340/NVG		•										
2400/NVG					•							
2400PL					•							
2450					•							
2410					•							
2410PL					•							
2460					•							
7000	•											
7060						•	•	•				
7100									•			
7600										•	•	
8040												•
8050												•

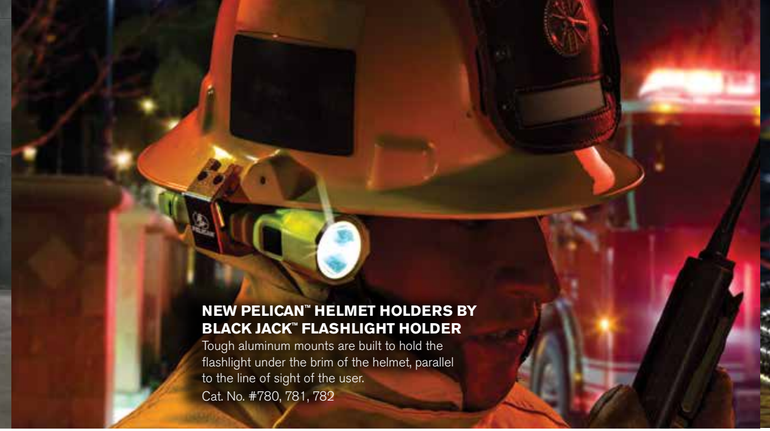

NEW PELICAN™ HELMET HOLDERS BY BLACK JACK™ FLASHLIGHT HOLDER
Tough aluminum mounts are built to hold the flashlight under the brim of the helmet, parallel to the line of sight of the user.
Cat. No. #780, 781, 782



NEW PELICAN™ HEAD STRAP RETAINERS BY BLACK JACK™
Set of four high temperature composite clips that utilize a 3M™ adhesive and will attach to any helmet.
CAT. No. 783

LIGHT AND HEADLIGHT HOLDER **STYLES** +

CAT NO.	CAT. NO. 700	CAT. NO. 750	CAT. NO. 770	CAT. NO. 780 FULL HOUSE	CAT. NO. 781 ACE	CAT. NO. 782 ALL IN	CAT. NO. 783 DOUBLE DOWN
2140		•					
2250	•	•					
2300		•	•		•		
2320			•		•		
2330			•		•		
2340		•	•		•		
2350					•		
2360					•		
2370					•		
2380/2380R					•		
2390			•		•		
2400/PL	•	•	•	•			
2410/PL	•	•	•	•			
2430	•	•	•	•			
2450	•	•	•	•			
2460	•	•	•	•			
3310			•			•	
3315/PL			•			•	
3325						•	
3330			•		•		
7000					•		
All Headlamps							•

	CAT NO.	BATTERIES (included)	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	LUMENS	RUN TIME	BEAM SPREAD	NUMBER OF LEDs	LAMP HEADS	CERTIFICATIONS	COLORS
REMOTE AREA **LIGHTING SYSTEMS** +	**9420XL**	Rechargeable Lithium ion	8.4 lbs. (3.8)	62.0" (157)[A]	1000*, 500***	2h*, 4h***	58°	2	1	N/A	■
	9430	Rechargeable, Sealed Lead Acid	22.65 lbs. (10.27)	32.28" (82)[A]	3000*, 1500***	8h*, 15h***	125°	6	1	N/A	■■
	9430SL	Rechargeable, Sealed Lead Acid	22.05 lbs. (10)	32.28" (82)[A]	2000*, 1000***	8h*, 15h***	10°	24	1	N/A	■
	9435	Rechargeable NiMH	17.6 lbs. (7.98)	32.28" (82)[A]	1500*, 750***	5h*, 10h***	90°	18	1	CI, D2	■
	9440	Rechargeable Lithium ion	16.09 lbs. (7.3)	85" (215.8)[A]	5300*, 2800** 1400***	1h 30m*, 4h** 8h***	125°	12	1	N/A	■■
	9460	Rechargeable, Sealed Lead Acid	61 lbs. (27.7)	79.50" (201.9)[A]	12,000 (variable)	3h*, 24h***	120°	10 per head	2	N/A	■■
	9460M	Rechargeable, Sealed Lead Acid	64 lbs. (24.95)	79.50" (201.9)[A]	12,000 (variable)	3h*, 24h***	120°	10 per head	2	N/A	■■
	9470	Rechargeable, Sealed Lead Acid	105 lbs. (47.6)	82.00" (208.3)[A]	24,000 (variable)	2h 45m*, 24h***	120°	10 per head	4	N/A	■■
	9470M	Rechargeable, Sealed Lead Acid	108lbs. (49)	82.00" (208.3)[A]	24,000 (variable)	2h 45m*, 24h***	120°	10 per head	4	N/A	■■
	9480	Rechargeable, Sealed Lead Acid	27.5 lbs. (12.47)	23.75" (60.3)[A]	4000*, 3000** 1000***	6h*, 8h** 28h***	125°	8	1	N/A	■■
	9490	Rechargeable, Sealed Lead Acid	32 lbs. (14.51)	72" (182.8)[A]	6000 (variable)	3h 30m*, 12h** 24h***	125°	10	1	N/A	■■
	9500	N/A	29.8 lbs. (13.52)	20.62" (52.4)	6000 (white LED) 1200 (red LED)	constant 120V	210° (diffused)	36	3	N/A	■

	CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
SMALL **LIGHTS** +	**1810**	4 LR 41 Alkaline (included)	0.5 oz. (0.01)	1.5" (3.8)	16	8h 30m	23	137	IPX4	N/A	■■■■■■
	1830	3 AAAA Alkaline (included)	1.2 oz. (0.03)	6.2" (15.7)	5	32h	13	44	IPX4	CI, D1	■■
	1900	2 AAA Alkaline (included)	1.6 oz. (0.05)	4.09" (10.4)	11	1h 30m	45	571	IPX7	CI, D1/CII, D2	■■■■□■
	1910	1 AAA Alkaline (included)	1.5 oz. (0.04)	3.8" (9.6)	106*, 21***	2h 30m*, 4h***	55*, 24***	765*, 140***	IPX7	N/A	■
	1910	1 AAA Alkaline (included)	1.5 oz. (0.04)	3.8" (9.6)	72*, 14***	1h 45m*, 4h***	64*, 28***	1031*, 198***	IPX7	N/A	■■■■■
	1920	2 AAA Alkaline (included)	2.2 oz. (0.06)	5.5" (14)	224*, 22***	2h 15m*, 8h 45m***	81*, 25***	1640*, 152***	IPX7	N/A	■
	1920	2 AAA Alkaline (included)	2.2 oz. (0.06)	5.5" (14)	120*, 12***	2h 45m*, 8h 30m***	87*, 27***	1893*, 184***	IPX7	N/A	■■■■■
	1930	4 LR 44 Alkaline (included)	0.9 oz. (0.03)	2.64" (6.7)	12	4h 15m	17	70	IPX4	CI, D1/CII, D2	■■
	1965	2 AAA Alkaline (included)	1.9 oz. (0.05)	5.48" (13.9)	34	3h 45m	45	512	IPX7	CI II III, D1	■■
	2140	2 AAA Alkaline (included)	1.8 oz. (0.05)	3.5" (8.9)	13	2h	84	1761	IPX7	CI, D2	■
	2220	2 CR2032 Lithium (included)	1 oz. (0.03)	3.5" (8.9)	9	34h	12	38	IPX4	CI, D1	■■■
	2300	2 AA Alkaline (included)	3.4 oz. (0.1)	5.62" (14.3)	11	4h 30m	43	478	IPX4	CI, D1/CII, D2	■■
	2340	2 AA Alkaline (not included)	3.5 oz. (0.1)	6.25" (15.9)	10	4h 30m	43	461	IPX4	CI II, D2	■■

*High | **Medium | ***Low | ****Downcast | [A] Extended Height | Additional approvals may apply. For details go to www.pelican.com

	CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
MEDIUM **LIGHTS** +	**1800**	2 C Alkaline (not included)	7.8 oz. (0.22)	6" (15.2)	21	7h	131	4370	IPX7	CI II, D2	■■
	1820	2 C Alkaline (included)	8.3 oz. (0.24)	5.83" (14.8)	22	6h 45m	146	5466	IPX7	CI II III, D2	■■
	2000	3 C Alkaline (not included)	12.8 oz. (0.36)	7.79" (19.8)	53	5h	158	6234	IPX7	CI, D1/CII, D2	■■■
	2000PL	3 C Alkaline (not included)	12.8 oz. (0.36)	7.79" (19.8)	53	5h	158	6234	IPX7	CI, D1/CII, D2	■
	2010	3 C Alkaline (not included)	13.4 oz. (0.38)	8.11" (20.6)	161	22h	160	6398	IPX7	CI II III, D1	■■
	2010PL	3 C Alkaline (not included)	13.4 oz. (0.38)	8.11" (20.6)	161	22h	160	6398	IPX7	CI II III, D1	■
	2020	3 C Alkaline (not included)	14.7 oz. (0.42)	8.75" (22.2)	75	6h 30m	113	3211	IPX7	CI, D1	■■
	2400	4 AA Alkaline (included)	7.1 oz. (0.2)	6.49" (16.5)	45	3h 45m	125	3934	IPX7	CI, D1/CII, D2	■■■■
	2400PL	4 AA Alkaline (included)	7.1 oz. (0.2)	6.49" (16.5)	45	3h 45m	125	3934	IPX7	CI, D1/CII, D2	■
	2410	4 AA Alkaline (included)	7.3 oz. (0.21)	7" (17.8)	183	5h 45m	184	8480	IPX7	CI II III, D1	■■
	2410PL	4 AA Alkaline (included)	7.3 oz. (0.21)	7" (17.8)	183	5h 45m	184	8480	IPX7	CI II III, D1	■
	2430	4 AA Alkaline (included)	6.1 oz. (0.17)	6.5" (16.5)	70	2h 15m	104	2766	IPX4	CI, D2	■■
	2450	Rechargeable NiMH (included)	7.8 oz. (0.22)	6.5" (16.5)	35	3h 30m	122	3735	IPX7	CI II, D2	■■
	2460	Rechargeable NiMH (included)	7.8 oz. (0.22)	7" (17.8)	183	5h	179	8050	IPX7	CI II, D2	■■
	3310PL	3 AA Alkaline (included)	6.2 oz. (0.18)	6.14" (15.6)	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	■ (photoluminescent)
	3310ELS	3 AA Alkaline (included)	6.2 oz. (0.18)	6.14" (15.6)	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	■ (photoluminescent)
	3315	3 AA Alkaline (included)	6.2 oz. (0.18)	6.14" (15.6)	160	19h	144	5153	IPX7	CI II III, D1	■■
	3315R	Rechargeable Lithium-Ion (included)	6.2 oz. (0.18)	6.11" (15.5)	132*, 15***	5h*, 34h***	108*, 35***	2931*, 308***	IPX7	CI, D1	■■
	3315PL	3 AA Alkaline (included)	6.2 oz. (0.18)	6.14" (15.6)	160	19h	144	5153	IPX7	CI II III, D1	■ (photoluminescent)
	3325	3 AA Alkaline (included)	6.1 oz. (0.17)	6.06" (15.4)	162	16h	144	5215	IPX7	CI, D1	■
LARGE **LIGHTS** +	**4000**	8 D Alkaline (not included)	74.08 oz. (2.1)	9.37" (23.8)	249	11h	106	3168	IPX7	CI II, D2	■■■
	9410L	Rechargeable Lithium-Ion (included)	44.7 oz. (1.27)	8.75" (22.2)	1203*, 553***	4h 30m*, 10h 30m***	430*, 287***	46,328*, 20,616***	IPX4	N/A	■■
	9415	Rechargeable NiMH (included)	49.3 oz. (1.4)	8.75" (22.2)	413*, 159***	4h 30m*, 12h***	325*, 201***	26352*, 10076***	IPX4	CI, D1	■
TACTICAL **LIGHTS** +	**2350**	1 AA Alkaline (included)	3.4 oz. (0.1)	4.23" (10.7)	178*, 15***	2h 15m*, 21h***	130*, 37***	4196*, 345***	IPX7	N/A	■
	2360	2 AA Alkaline (included)	5.4 oz. (0.15)	6.2" (15.7)	375*, 29***	2h 30m*, 13h***	192*, 53***	9187*, 705***	IPX8	N/A	■
	2370	2 AA Alkaline (included)	6.5 oz. (0.18)	6.43" (16.3)	358*, 35***	2h*, 11h***	158*, 52***	9000*, 823***	IPX7	N/A	■
	2380	2 AA Alkaline (included)	6.6 oz. (0.19)	6.44" (16.4)	372*, 31***	3h 30m*, 13h***	167*, 46***	6967*, 527***	IPX7	N/A	■

*High | **Medium | ***Low | ****Downcast | [A] Extended Height | Additional approvals may apply. For details go to www.pelican.com

	CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
TACTICAL LIGHTS +	2380R	Rechargeable Lithium-Ion (included)	6.6 oz. (0.19)	6.48" (16.5)	305*, 30***	3h 30m*, 25h***	159*, 50***	6317*, 613***	IPX7	N/A	■
	3330	2 CR123 Lithium (included)	3.45 oz. (0.1)	5.27" (13.4)	90	4h 45m	88	1959	IPX4	N/A	■ ■
	7000	2 CR123 Lithium (included)	5.6 oz. (0.16)	5.31" (13.5)	602*, 311** , 64***	1h 30m*, 2h**, 16h***	233*, 165**, 75***	13604*, 6830**, 1409***	IPX7	N/A	■
	7060	Rechargable Lithium-Ion (included)	10.4 oz. (0.29)	8.65" (22)	368*, 150**, 18***	3h*, 9h**, 45h***	199*, 125**, 43***	9953*, 3922**, 473***	IPX4	v	■
	7100	Lithium-Ion	4.4 oz. (0.13)	5.12" (13)	695*, 348**, 33***	1h 15m*, 1h 30m**, 9h 15m***	194*, 130**, 38***	9314*, 4247**, 358***	IPX8	N/A	■
	7600	Lithium-Ion	7.1 oz. (0.20)	6.19" (15.7)	944*, 479**, 37***	3h 15m*, 4h 30m**, 29h***	225*, 157**, 44***	12693*, 6172**, 480***	IPX8	N/A	■
	8050	Rechargeable NiMH (included)	17.92 oz. (0.51)	11.25" (28.6)	164	2h 15m	256	16448	IPX4	N/A	■ ■
	8060	Rechargeable NiMH (included)	23.2 oz. (0.66)	12.67" (32.2)	803*, 447**, 25***	2h 30m*, 4h**, 69h***	359*, 265**, 62***	32252* , 17492**, 958***	IPX4	N/A	■
HEAD LAMPS +	2600	4 AA Alkaline (included)	9.7 oz. (0.27)	3.81" (9.7)	18	3h 30m	27	203	IPX7	CI II III, D2	■
	2610	3 AAA Alkaline (included)	3.2 oz. (0.09)	1.49" (3.8)	30*, 14***	19h*, 47h***	28*, 19***	194*, 91***	IPX4	CI, D1	■
	2620	3 AAA Alkaline (included)	4.8 oz. (0.14)	2.16" (5.5)	26*, 14***	2h 15m*, 18h**	44*, 29**	491*, 216**	IPX4	CI, D1	■
	2640	4 AA Alkaline (included)	10.9 oz. (0.31)	2.63" (6.7)	29*, 16***	2h 45m*, 17h**	46*, 20***	586*, 103***	IPX4	CI, D2	■
	2680	4 AA Alkaline (included)	9.7 oz. (0.27)	4.64" (11.8)	79	10h	123	3789	IPX7	CI II III, D2	■
	2690	3 AAA Alkaline (included)	4.1 oz. (0.12)	2.81" (7.1)	74	11h	92	2124cd	IPX7	CI II III, D1	■
	2720	3 AAA Alkaline (included)	3.8 oz. (0.11)	2.48" (6.3)	200*, 12***	3h*, 103h***	82*, 20***	1684*, 103***	IPX4	N/A	■
	2740	3 AAA Alkaline (included)	3.3 oz. (0.09)	2.25" (5.7)	66*, 36***	7h 15m*, 21h***	22*, 16***	122*, 68***	IPX4	N/A	■ ■ (translucent)
	2745	3 AAA Alkaline (included)	3.3 oz. (0.09)	2.25" (5.7)	33*, 17***	20h*, 40h***	35* , 25***	309*, 155***	IPX4	CI, D1	■ ■
	2750	3 AAA Alkaline (included)	3.4 oz. (0.1)	2.25" (5.7)	193*, 63***	3h*, 11h***	98*, 58***	1250* , 591***	IPX4	N/A	■ ■ (photoluminescent)
	2755	3 AAA Alkaline (included)	3.4 oz. (0.1)	2.25" (5.7)	72*, 34***	6h*, 15***	57*, 40***	807* , 404***	IPX4	C1, D1	■ ■
	2760	3 AAA Alkaline (included)	3.4 oz. (0.1)	2.25" (5.7)	204*, 141**, 95***, 42****	2h*, 3h 15m**, 5h***, 11h****	111*, 80**, 59***, 19****	3065*, 1606**, 861***, 88****	IPX4	N/A	■ ■ (translucent)
	2765	3 AAA Alkaline (included)	3.4 oz. (0.1)	2.25" (5.7)	105*, 104**, 65***, 33****	4h 15m*, 4h**, 6h 15m***, 9h****	107*, 93**, 63***, 9****	2876*, 2163**, 978***, 18****	IPX4	C1, D1	■ ■
	2780	4 AA Alkaline (included)	250 oz. (7.09)	3" (7.6)	430*, 203**, 53***	1h 30m*, 3h**, 12h***	127*, 81**, 27***	3868*, 1625**, 425***	IPX7	N/A	■ □ ■ (photoluminescent)
	2780R	Rechargeable Lithium-Ion (included)	250 oz. (7.09)	3" (7.6)	558*, 213**, 95***	2h*, 3h**, 7h 30m***	127*, 78**, 53***	4060*, 1540**, 695***	IPX7	N/A	■ □ ■ (photoluminescent)
	2785	4 AA Alkaline (included)	250 oz. (7.09)	3" (7.6)	226*, 103**, 33***	5h 45m*, 20h**, 66h***	111*, 74**, 41***	3058*, 1372**, 417***	IPX7	CI, D1	■ ■

*High | **Medium | ***Low | ****Downcast | ^ Extended Height | Additional approvals may apply. For details go to www.pelican.com

	CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
RIGHT ANGLE LIGHTS +	2250	2 AA Alkaline (included)	0.3 oz. (0.09)	3.87" (9.8)	7	5h 30m	54	726	IPX4	CI II, D2	■
	3315R-RA	Rechargeable Lithium-Ion (included)	6.2 oz. (0.18)	6.11" (15.5)	132*, 15***	5h*, 34h***	108*, 35***	2931*, 308***	IPX7	CI, D1	■
	3610	4 AA Alkaline (included)	10.5 oz. (0.3)	7.51" (19.1)	183	5h 45m	184	8480	IPX7	CI II III, D1	■ ■
	3610PL	4 AA Alkaline (included)	10.5 oz. (0.3)	7.51" (19.1)	183	5h 45m	184	8480	IPX7	CI II III, D1	■
	3660	Rechargeable 4 AA NiMH (included)	10.56 oz. (0.3)	7.51" (19.1)	183	5h	153	5828	IPX7	CI II, D2	■ ■
	3700	4 C Alkaline (not included)	20.32 oz. (0.58)	7" (17.8)	39*, 25 (back-up)	6h 15m*, 8h 30m (back-up)	98*, 51(back-up)	2437*, 684 (back-up)	IPX4	CI, D2	■
	3700PL	4 C Alkaline (not included)	20.32 oz. (0.58)	7" (17.8)	39*, 25 (back-up)	6h 15m*, 8h 30m (back-up)	98*, 51(back-up)	2437*, 684 (back-up)	IPX4	CI, D2	■
	3715	4 AA Alkaline (not included)	14.4 oz. (0.41)	5.36" (13.6)	233*, 113***, 31****	4h*, 7h***, 31h****	293*, 187***, 30****	21440*, 8775***, 220****	IPX4	CI, D1	■ ■
	3715PL	4 AA Alkaline (not included)	14.4 oz. (0.41)	5.36" (13.6)	233*, 113***, 31****	4h*, 7h***, 31h****	293*, 187***, 30****	21440*, 8775***, 220****	IPX4	CI, D1	■
	3750	Rechargeable NiCad (included)	20.48 oz. (0.58)	7" (17.8)	96*, 28 (back-up)	1h 45m*, 4h (back-up)	133* , 65 (back-up)	4468*, 1048 (back-up)	IPX4	CI, D2	■
	3750PL	Rechargeable NiCad (included)	20.48 oz. (0.58)	7" (17.8)	96*, 28 (back-up)	1h 45m*, 4h (back-up)	133* , 65 (back-up)	4468*, 1048 (back-up)	IPX4	CI, D2	■
	3765	Rechargeable NiMH (included)	14.6 oz. (0.41)	5.36" (13.6)	237*, 113***, 32****	3h*, 6h 30m***, 14h****	301*, 193***, 28****	22720*, 9354***, 192****	IPX4	CI, D1/CI, D2 (w/alkalines)	■ ■
	3765PL	Rechargeable NiMH (included)	14.6 oz. (0.41)	5.36" (13.6)	237*, 113***, 32****	3h*, 6h 30m***, 14h****	301*, 193***, 28****	22720*, 9354***, 192****	IPX4	CI, D1/CI, D2 (with/alkalines)	■
DIVE LIGHTS +	1960N	2 AAA Alkaline (included)	1.9 oz. (0.05)	5.48" (13.9)	34	3h 30m	42	450	IPX8	N/A	■ ■ ■
	2010N	3 C Alkaline (not included)	13.4 oz. (0.38)	8.11" (20.6)	161	22h	260	6398	IPX8	N/A	■ ■ ■
	2410N	4 AA Alkaline (included)	7.3 oz. (0.21)	7" (17.8)	183	5h 45m	184	8480	IPX8	N/A	■ ■ ■
SPECIALTY LIGHTS +	2130	2 L1154 Alkaline (included)	0.5 oz. (0.01)	1.73" (4.4)	4.7 (non ANSI)	130h (non ANSI)	N/A	N/A	IPX7	N/A	■
	2130IR	2 L1154 Alkaline (included)	0.5 oz. (0.01)	1.73" (4.4)	N/A	65h (non ANSI)	N/A	N/A	IPX7	N/A	■
	2365	2 AA Alkaline (not included)	9.3 oz. (0.26)	21.92" (55.7)	65	7h	81	1644	IPX4	N/A	■
	2490	4 AA Alkaline (not included)	8.2 oz. (0.23)	12.5" (31.7)	64	12h	118	3459	IPX7	N/A	■

*High | **Medium | ***Low | ****Downcast | ^ Extended Height | Additional approvals may apply. For details go to www.pelican.com

CUSTOM LABELS

Pelican Products offers the ultimate in private labeling. You can put your company name and logo or a special statement on many Pelican lights. Our in-house private label molding and production department has complete short and long run capabilities for a variety of custom applications and custom colors. We have the latest hot stamping equipment, utilizing the world's most durable inks and foils in our screening, hot tipping, embossing, and molding programs.





GRAPHIC DESIGN STUDIO
Our in-house graphics studio will take your logo and size it appropriately to the flashlight of your choice.



HOT STAMPING
Our hot stamping department is equipped with the latest technology in custom imprinting. Minimum quantities apply.



100% ACCURACY
Pelican's strict QA inspection team will check for quality of print and 100% accuracy in color and placement.