North American Headquarters
601 Rayovac Drive
Madison, WI 53711
Telephone 1-800-331-4522
Internet www.rayovac.com


Marketing Data Sheet - Batteries

S6600506
Issue A
Memo No:19752


Rayovac Stock Number: PL714

Name: PL714 C Platinum NiMH, R2U Grade (3000)

Dimensions:

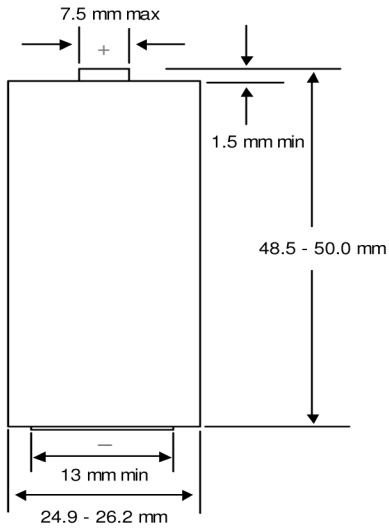


Discharge Curve Profiles:

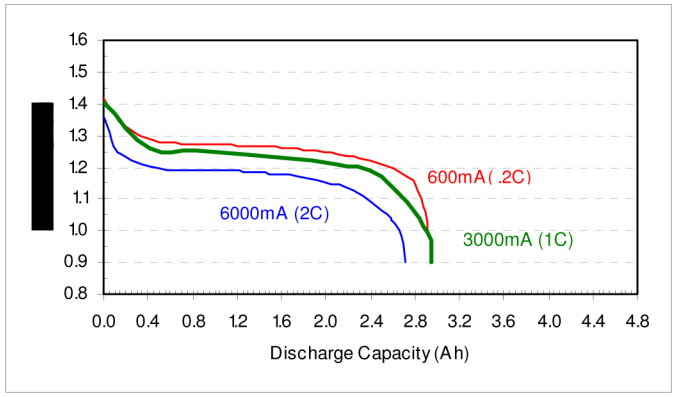

Specifications:

Cell Type: Nickel Metal Hydride		Size: C - PL714
Size Designation	ANSI C18.2	1.2H3
	IEC 61951-2	HR 14
Physical Attributes	Weight	62 g
	Size	7.5 (D) x 50 (H) mm
	Volume	24.53 cc
External Insulating Cell Jacket		Polyvinylchloride (PVC)
Nominal Voltage for 600mA ($0.2I_tA$) load		1.24 V
Energy Content	Energy Density	147 Wh/l
	Specific Energy	59 Wh/kg
Charge Temperature Range	Standard	0º to 45ºC
	Rapid	0º to 45ºC
	Maintenance	0º to 45ºC
Discharge Temperature Range		-10º to 60ºC
Storage Temperature Range	<3 Months	-20º to 50ºC
	3-9 Months	-20º to 40ºC
	3-12 Months	-20º to 30ºC
Cycle Life Expectancy		More than 200 Cycles
Meets EPA requirements for landfill, no mercury added formulation		

Charge Curve Profiles:

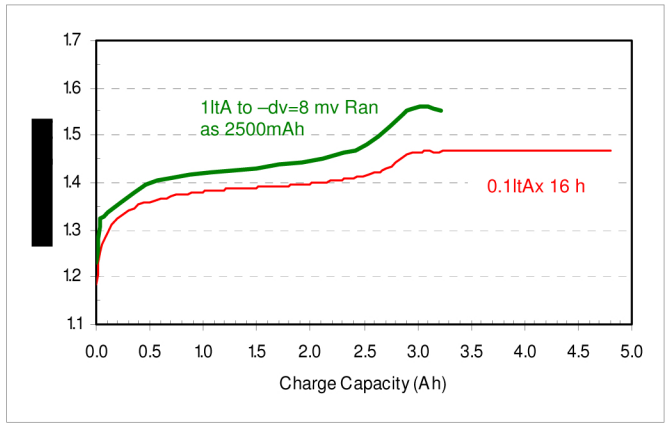

Discharge Capacity Profile (Crg:Dis)

