Series 60
BLOW GUNS

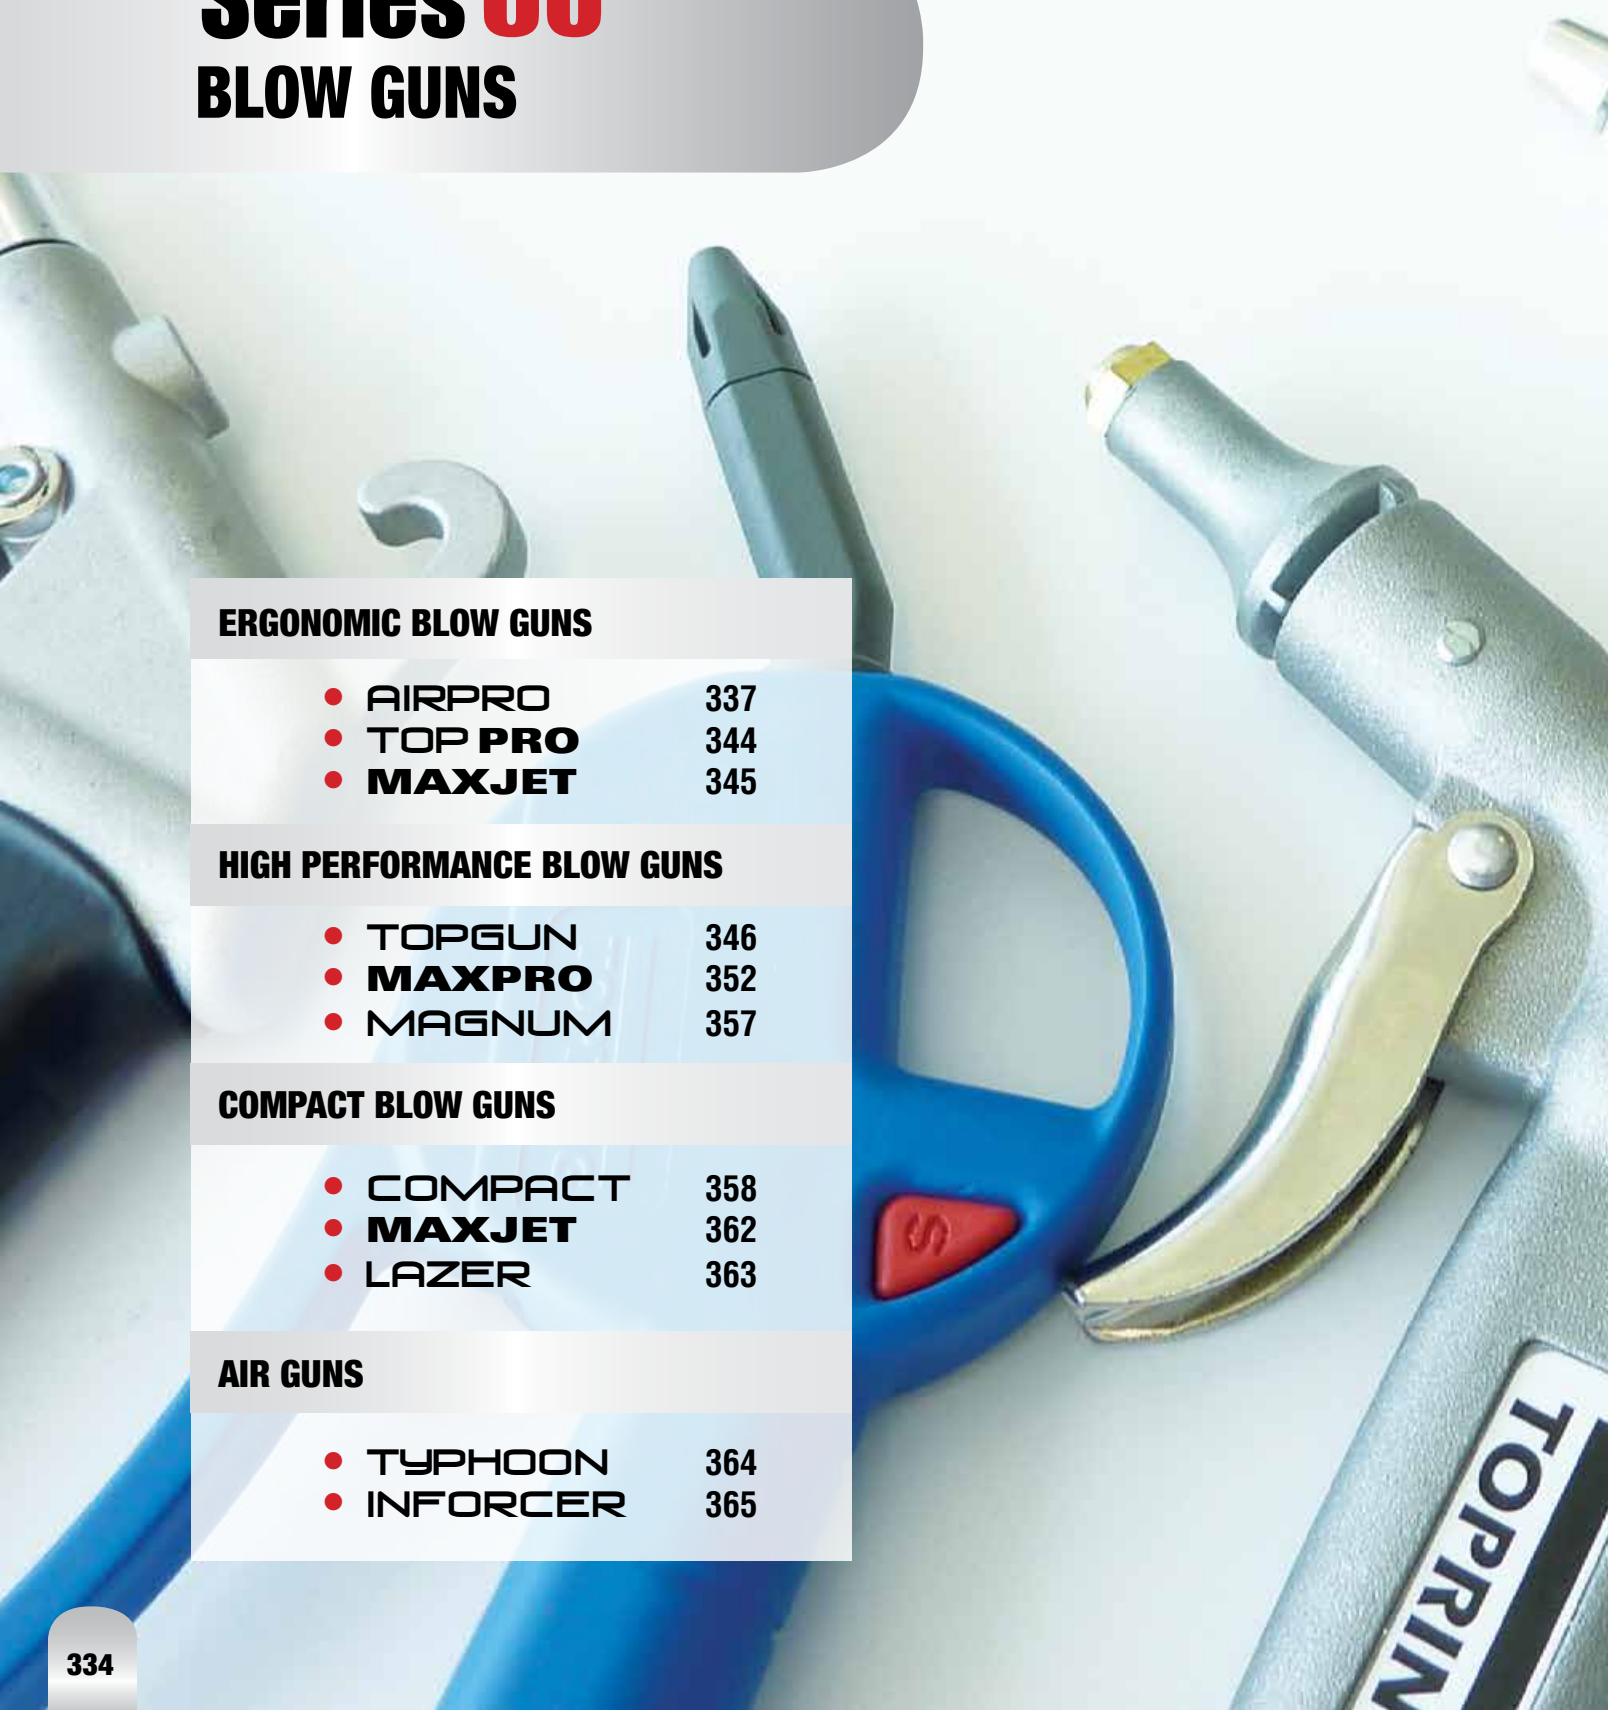

ERGONOMIC BLOW GUNS

- AIRPRO 337
- TOP PRO 344
- MAXJET 345

HIGH PERFORMANCE BLOW GUNS

- TOPGUN 346
- MAXPRO 352
- MAGNUM 357

COMPACT BLOW GUNS

- COMPACT 358
- MAXJET 362
- LAZER 363

AIR GUNS

- TYPHOON 364
- INFORCER 365


TOPRING
Max. 2 bar

WORKING WITH A QUALITY BLOW GUN IS NOT ONLY COMMON SENSE, BUT A SAFE INVESTMENT

Wherever compressed air blow guns are used for cleaning there is a real danger of injury to workers and damage to equipment caused by particles being ejected and blown into the air. This is why the following OSHA regulations pertaining to output pressure, chip guarding and noise are of particular relevance to users of safety air guns and spray equipment.

OUTPUT PRESSURE

Factory air lines operate at pressures of between 80 and 120 PSI. Most pneumatic tools, including air guns, require such high pressures to operate effectively.

However, OSHA and other Safety Agencies require that in the event such air lines are dead-ended (for example, if the tip of an air gun is blocked), the static pressure at the point of blockage should be no more than 30 PSI. All **TOPRING** safety air guns meet this requirement.

Refer to 29CFR Part 1910.242 (b) Hand and portable powered tools and equipment, general and OSHA Instruction STD 1-13.1 (OSHA PROGRAM DIRECTIVE #100-1)

CHIP GUARDING

When blowing off debris with an air gun in close quarters, workers are subject to “chip fly-back”. This term refers to the tendency of loose particles or chips to fly back into the operator's face, eyes or skin. For operations which require close-in work, OSHA and other Safety Agencies require that “effective chip guarding” be incorporated into the workplace. Many **TOPRING** safety air guns designed for close-in work incorporate a protective air cone for effective chip guarding.

Refer to 29CFR Part 1910.242 (b) Hand and portable powered tools and equipment, general and OSHA Instruction STD 1-13.1 (OSHA PROGRAM DIRECTIVE #100-1)

NOISE

Excessive noise generated in the workplace can be harmful. To address this problem, OSHA and other Safety Agencies have developed permissible daily noise exposure specifications. Air guns often contribute to high levels of occupational noise; the use of low noise, safety air guns can be an important component in moving towards noise compliance. Many **TOPRING** safety air guns incorporate noise limiting features.

Refer to 29CFR Part 1910.95 (A) Occupational noise exposure.

OSHA REGULATIONS

29CFR Part 1910.242 (b)

Hand and portable powered tools and equipment, general. Compressed air used for cleaning. Compressed air shall not be used for cleaning purposes except where reduced to less than 30 PSI and then only with effective chip guarding and personal protective equipement.

OSHA Instruction STD 1-13.1

October 30, 1978
Office of Program Operations

February 14, 1972
OSHA PROGRAM DIRECTIVE N° 100-1

To: **National and Field Offices**
Subject: **Reduction of Air Pressure Below 30 PSI for Cleaning Purposes**
Attachment: **Acceptable Methods for Complying with 41 CFR 50-204.8 and 29 CFR 1910.242(b)**

1. **Purpose.** To provide guidance and examples of what alternate systems will meet the requirements of this section, and to clarify its intent.
2. **Background.** A number of inquiries have been received requesting a clarification of the meaning of 1910.242(b) also known as 41 CFR 50-2048 under the Walsh-Healey Act.
3. **Interpretation.** The phrase ”reduce to less than 30 PSI” means that the downstream pressure of the air at the nozzle (nozzle pressure) or opening of a gun, pipe, cleaning lance, etc., used for cleaning purposes will remain at a pressure level below 30 PSI for all static conditions. The requirements for dynamic flow are such that in the case when dead ending occurs a static pressure at the main orifice shall not exceed 30 PSI. This requirement is necessary in order to prevent a back pressure buildup in case the nozzle is obstructed or dead ended. See enclosure (1) for two acceptable methods of meeting this requirement. Also, there is no intent to restrict the diameter of the nozzle orifice or the volume (CFM) flowing from it.

   "Effective chip guarding" means any method or equipment which will prevent a chip or particle (of whatever size) from being blown into the eyes or unbroken skin of the operator or other workers. Effective chip guarding may be separate from the air nozzle as in the case where screens or barriers are used. The use of protective cone air nozzles are acceptable in general for protection of the operator but barriers, baffles or screens may be required to protect other workers if they are exposed to flying chips or particles.
4. **Action.** Inquiries about subject section should be handled in accordance with this instruction.
5. **Effective Date.** This instruction is effective immediately, and will remain in effect until canceled or superseded.

   Director, of Program Operations.

29CFR Part 1910.95 (a)

Occupational noise exposure.
Protection against the effects of noise exposure shall be provided when the sound levels exceed those shown in Table G-16 when measured on the A scale of a standard sound level meter at slow response.

Table G-16 Permissible Noise Exposures

Duration per day, hours	8.0	6.0	4.0	3.0	2.0	1.5	1.0	0.5	0.25
Sound level dBA slow response	90	92	95	97	100	102	105	110	115

AIRPRO
BLOW GUNS

GENERAL FEATURES AND BENEFITS

AIRFLOW ADJUSTMENT
- Control mechanism allows progressive airflow adjustment
- Airflow can be regulated simply by squeezing and releasing the handle

HIGH OUTPUT PERFORMANCE
- High flow for maximum blowing power

SAFETY BLOW GUNS
- Safety models comply with OSHA and other Safety Agencies' requirements.

HIGH QUALITY, HIGH STRENGTH CONSTRUCTION
- Polymer material construction provides maximum durability
- High impact resistance and chemically inert

EASY CLEANING
- Highly resistant surface can be easily cleaned of oil and greases without solvents

EASY STORAGE
- Convenient built-in ring
- Inside of handle may be also used to hang up gun

ERGONOMIC DESIGN
- Nozzle and lever are ergonomically designed to reduce hand fatigue and help minimize carpal tunnel syndrome
- Direction of air jet is aligned with forearm to avoid unnecessary strain
- Long lever for quick, comfortable grip, easy to squeeze even during prolonged use
- Lightweight body fits perfectly into the palm of the hand
- Comfortable slip-free hand grip with soft spring action
- Extended gap between lever and nozzle provides efficient safety guard for user's fingers
- Bent tube allows access to difficult-to-reach places
- Body material insulator prevents cold hands

GENERAL APPLICATIONS

Clearing away chips and shavings, cleaning of parts and machines, blowing, drying and dust removal from parts and work areas

For machine and woodworking shops, construction, lumber mills, paper mills, textile mills, foundries, transportation, bakeries and food processing, rubber and plastic manufacturing plants, general cleanup and maintenance

MATERIALS

Body: Hostaform C®

Nozzle: Plated steel/stainless steel/Aluminium

Valve: Hostaform C®

Springs: Stainless steel

Seals: Buna-N/Nitrile

SPECIFICATIONS

Temperature Range: -40 °C to 65 °C

Connection: 1/4 (F) NPT



WARNING

Under no circumstances should a blow gun be used to clean workers' clothes or body. A vacuum should be used instead.

AIRPRO
MAXIMUM SAFETY BLOW GUNS

Maximum safety, a unique concept!

TOPRING maximum safety blow guns exceed OSHA or other Health and Safety Agencies requirements. If the tip of the nozzle is blocked, a check valve located inside the blow gun mechanism immediately shuts off the airflow. Thus a worker will never risk being exposed to dangerous airflow on his skin. When the tip of nozzle is free of any obstruction, the valve reactivates to release air.



FEATURES AND BENEFITS

- The safest blow gun on the market
- These models combine full-strength air jet and low noise level
- A built-in tamper-proof regulator automatically shuts off the airflow if the tip of the nozzle is blocked
- Rubber tip model eliminates scratching on delicate surfaces
- Airflow is variable depending on the amount of pressure applied to the lever

150 PSI | ERGONOMIC SOLUTION | OSHA | SAFETY SOLUTION | QUIET

SPECIFICATIONS

Noise Level at 87 PSI: 67 dB
Air Consumption: 4.2 SCFM
Maximum Working Pressure: 150 PSI
Maximum Output Thrust: 0.2 lb
Connection: 1/4 (F) NPT



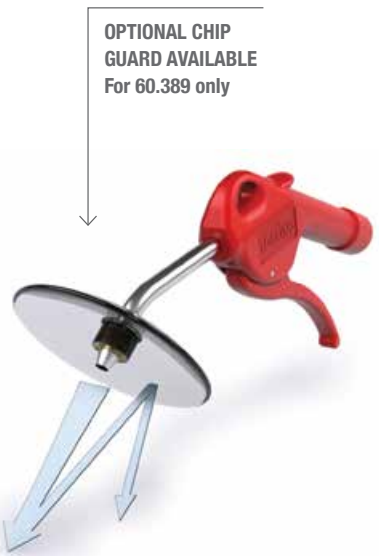

Product No	Description
60.385	With 8 mm x 10 cm (4") tube and rubber tip - Red
60.389	With 8 mm x 10 cm (4") tube - Red
60.296	Chip guard for 60.389

For applications, materials and specifications, see page 337

AIRPRO
SAFETY BLOW GUNS WITH StarTip NOZZLE

SAFETY SOLUTION

ERGONOMIC SOLUTION

QUIET

FEATURES AND BENEFITS

- Powerful safety blow guns
- Quiet – StarTip nozzle reduces noise by up to 20 decibels
- StarTip nozzle prevents total blockage, thereby complying with OSHA safety standards
- Concentrated airflow for maximum effectiveness
- Slim tip allows access to tight spaces
- Corrosion-resistant stainless steel tube

SPECIFICATIONS

Noise Level at 87 PSI: 76.8 dB
Air Consumption: 8.7 SCFM
Maximum Working Pressure: 150 PSI
Maximum Output Thrust: 0.46 lb
Connection: 1/4 (F) NPT



Product No	Description
60.357	With 6 mm tube x 10 cm (4") - Blue
60.377	With 8 mm tube x 10 cm (4") - Red

For applications, materials and specifications, see page 337

AIRPRO
SAFETY HIGH FLOW VENTURI NOZZLE BLOW GUNS

FEATURES AND BENEFITS

- Powerful safety air guns
- Aluminium Venturi nozzle increases the available thrust
- If tip is blocked, static pressure will remain at less than 30 PSI to meet OSHA safety standards

SPECIFICATIONS

Noise Level at 87 PSI: 83.7 dB
Air Consumption: 8.3 SCFM
Maximum Working Pressure: 150 PSI
Maximum Output Thrust: 0.52 lb
Connection: 1/4 (F) NPT

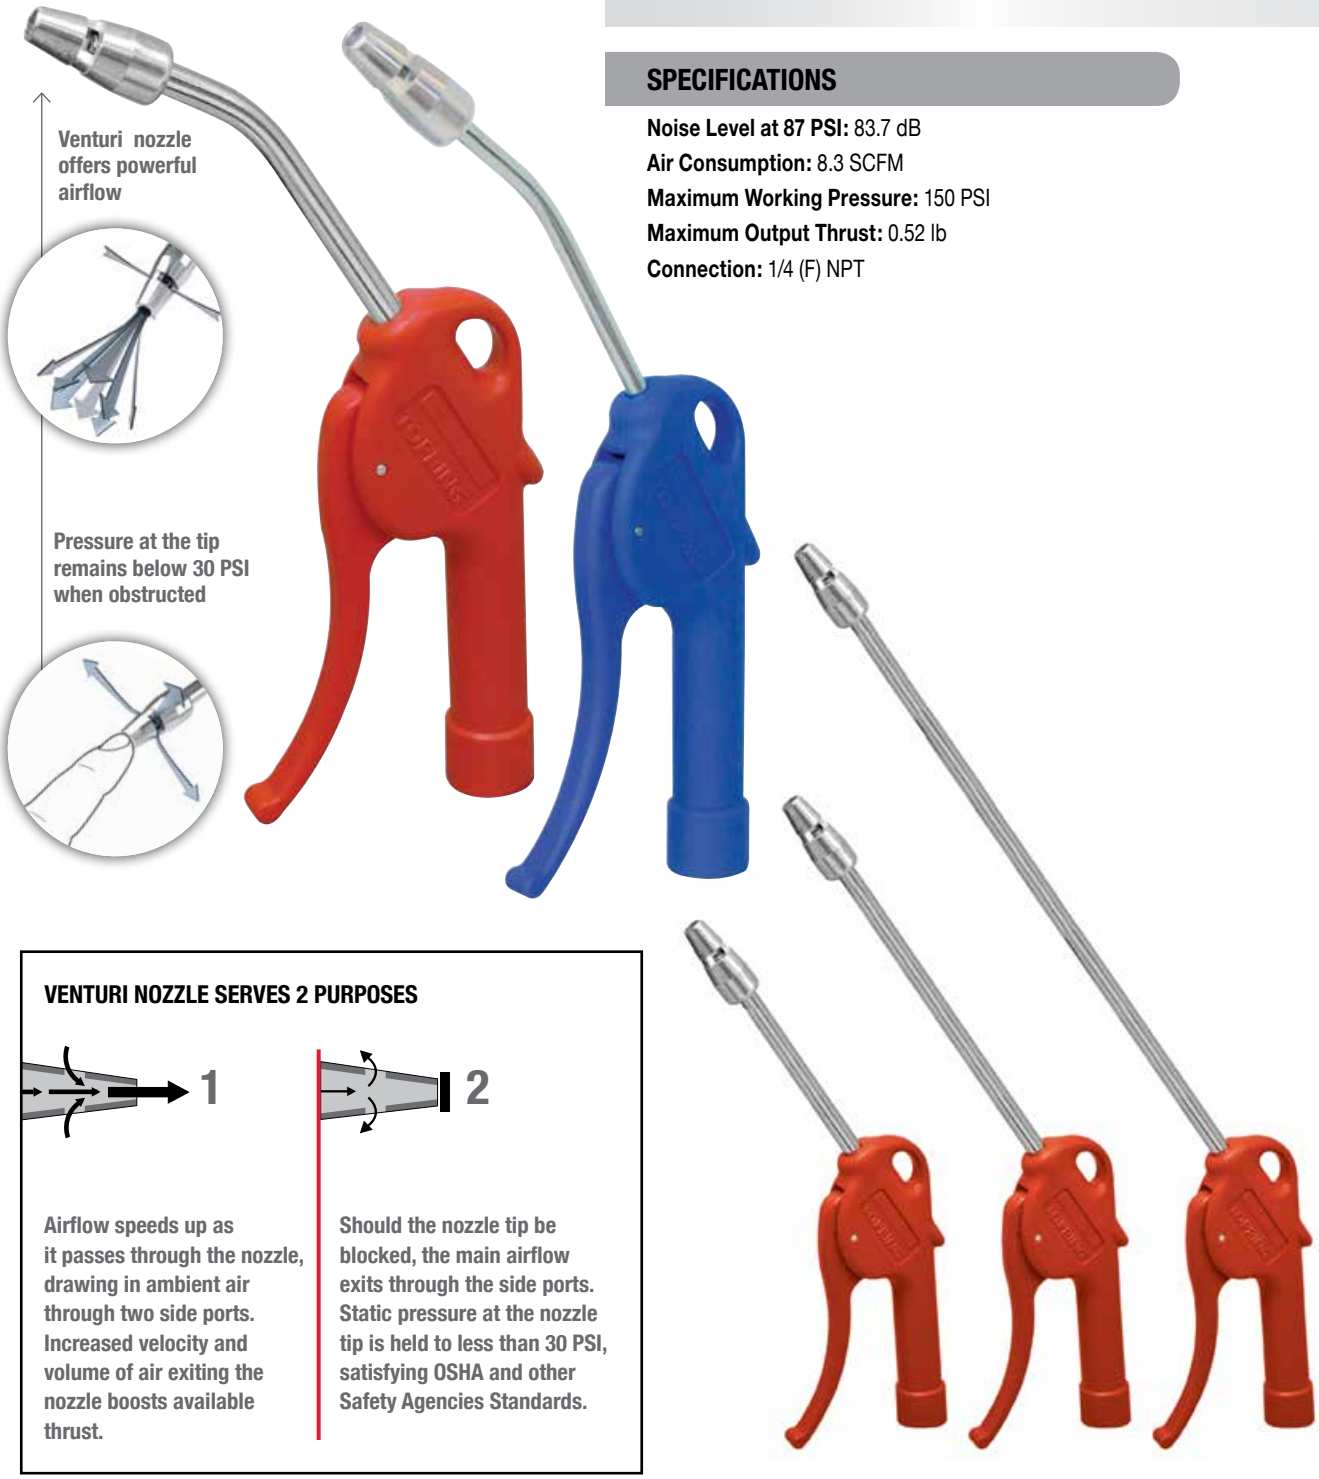

VENTURI NOZZLE SERVES 2 PURPOSES

Airflow speeds up as it passes through the nozzle, drawing in ambient air through two side ports. Increased velocity and volume of air exiting the nozzle boosts available thrust.

Should the nozzle tip be blocked, the main airflow exits through the side ports. Static pressure at the nozzle tip is held to less than 30 PSI, satisfying OSHA and other Safety Agencies Standards.

Product No	Description
60.386	With 8 mm tube x 10 cm (4") - Red
60.350	With 6 mm tube x 10 cm (4") - Blue

Product No	Description
60.382	With 8 mm tube x 30 cm (12") - Red
60.383	With 8 mm tube x 50 cm (20") - Red
60.384	With 8 mm tube x 100 cm (40") - Red

For applications, materials and specifications, see page 337

AIRPRO FLAT NOZZLE SAFETY BLOW GUN

OSHA 115 PSI
SAFETY SOLUTION
ERGONOMIC SOLUTION
QUIET

FEATURES AND BENEFITS

- Specially designed flat nozzle for applications requiring a concentrated flat stream of powerful air
- The best air gun for cleaning bench tops, work stations, machinery and equipment in noise-sensitive areas
- In the event of a tip blockage, air escapes through radial holes keeping the pressure safely below 30 PSI to meet OSHA safety standards



SPECIFICATIONS

Noise Level at 87 PSI : 78 dB
Air Consumption: 15.9 SCFM
Maximum Working Pressure: 115 PSI
Maximum Output Thrust: 0.84 lb
Connection: 1/4 (F) NPT

Product No	Description
60.381	Flat nozzle - Red

For applications, materials and specifications, see page 337

SILENT SAFETY BLOW GUNS

OSHA 150 PSI
SAFETY SOLUTION
ERGONOMIC SOLUTION
QUIET

FEATURES AND BENEFITS

- Specially designed tip reduces noise by 6 to 20 dB over conventional air guns
- Energy efficient
- Tip prevents blockage, satisfying OSHA safety standards
- Airflow control throttle screw model provides lower independent airflow for delicate jobs (60.388)

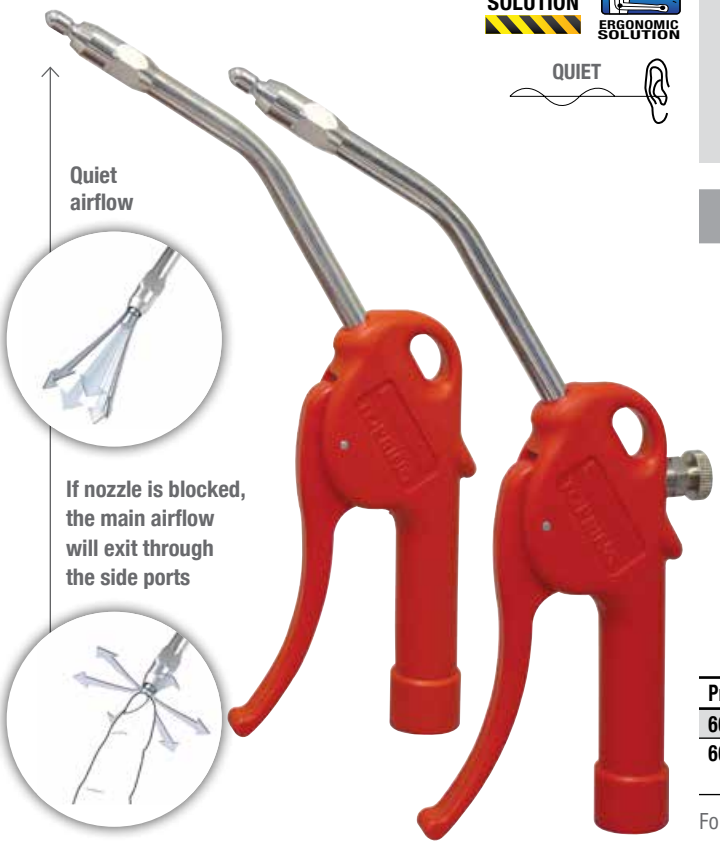

SPECIFICATIONS

Noise Level at 87 PSI: 71.6 dB
Air Consumption: 6.7 SCFM
Maximum Working Pressure: 150 PSI
Maximum Output Thrust: 0.27 lb
Connection: 1/4 (F) NPT

Product No	Description
60.387	With 8 mm tube x 13 cm (5") - Red
60.388	With 8 mm tube x 13 cm (5") with airflow control - Red

For applications, materials and specifications, see page 337

AIRPRO NON-RESTRICTED BLOW GUNS

WARNING

AIRPRO non-restricted blow guns do not have a safety by-pass and must be used on air lines which have a pressure regulator (such as a 62.202) set at a maximum of 30 PSI to conform to OSHA and other Safety Agencies' requirements.

HIGH PERFORMANCE NON-RESTRICTED BLOW GUNS

150 PSI

FEATURES AND BENEFITS

- Provides a narrow, high velocity jet of air
- Ergonomic design reduces fatigue and carpal tunnel syndrome
- Airflow control throttle screw model provides lower independent airflow for delicate jobs (60.392)
- Corrosion-resistant stainless steel tube for harsh or aggressive environments (60.399)



SPECIFICATIONS

Noise Level at 87 PSI : 84 dB
Air Consumption: 10.2 SCFM
Maximum Working Pressure: 150 PSI
Maximum Output Thrust: 0.64 lb
Connection: 1/4 (F) NPT

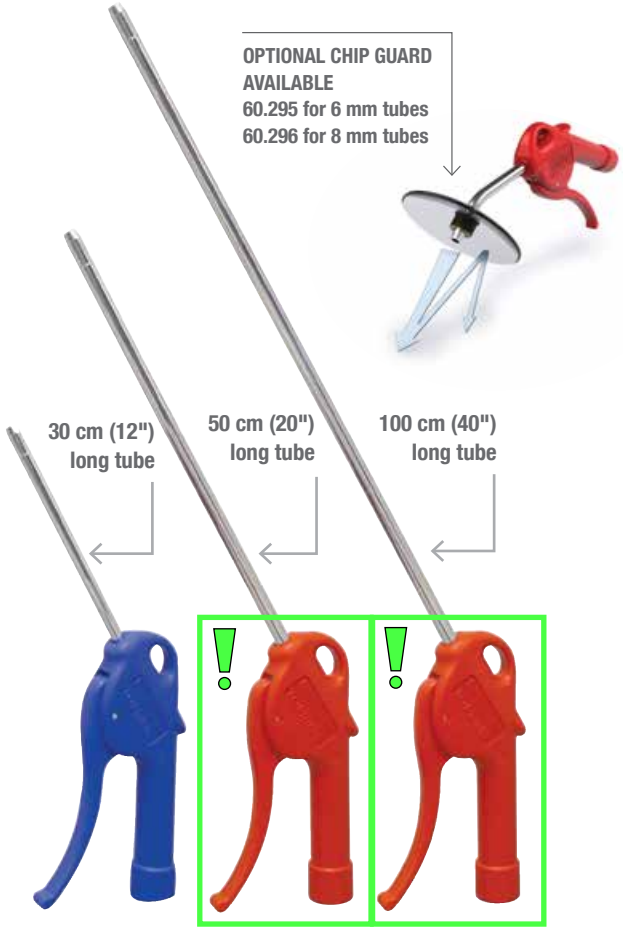

For applications, materials and specifications, see page 337

Product No	Description
60.320	With 6 mm tube x 10 cm (4") - Blue
60.390	With 8 mm tube x 10 cm (4") - Red
60.392	With 8 mm tube x 10 cm (4") with airflow control - Red
60.399	With 8 mm stainless steel tube x 10 cm (4") - Red

Product No	Description
60.325	With 6 mm tube x 30 cm (12") - Blue
60.393	With 8 mm tube x 30 cm (12") - Red
60.395	With 8 mm tube x 50 cm (20") - Red
60.396	With 8 mm tube x 100 cm (40") - Red

AIRPRO NON-RESTRICTED BLOW GUNS WITH RUBBER TIP

150 PSI

FEATURES AND BENEFITS

- Powerful airflow
- Provides a narrow, high velocity jet of air
- Rubber tip eliminates scratching of delicate surfaces



For applications, materials and specifications, see page 337

SPECIFICATIONS

Noise Level at 87 PSI: 84 dB
Air Consumption: 10.2 SCFM
Maximum Working Pressure: 150 PSI
Maximum Output Thrust: 0.64 lb
Connection: 1/4 (F) NPT

WARNING

AIRPRO non-restricted blow guns do not have a safety by-pass and must be used on air lines which have a pressure regulator (such as a 62.202) set at a maximum of 30 PSI to conform to OSHA and other Safety Agencies' requirements. However, AIRPRO non-restricted blow guns do incorporate the same design and construction features as the AIRPRO safety blow guns.

Product No	Description
60.330	With 6 mm tube x 4" - Blue
60.397	With 8 mm tube x 4" - Red

SAVEAIR® IN-LINE PRE-SET ENERGY SAVING MINIATURE REGULATOR

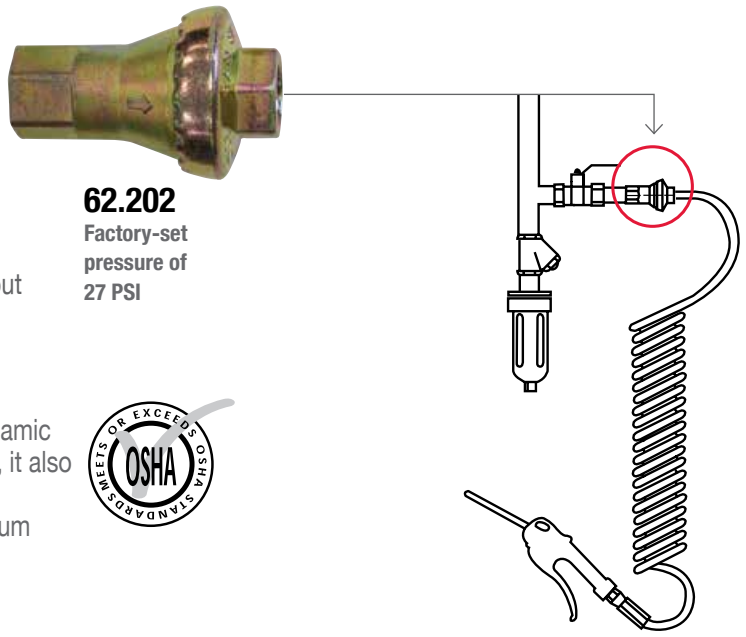

62.202
Factory-set pressure of 27 PSI

The SAVEAIR® supplies a constant, exact outlet pressure regardless of the input pressure. The pressure is factory-set and cannot be changed.

Not only does this regulator prevents "dynamic pressure waste" which is extremely costly, it also optimizes blow guns performance while respecting safety standards with a maximum exit pressure of less than 30 PSI.

FOR MORE DETAILS, SEE SERIES 62

TOP PRO
SAFETY BLOW GUN

OSHA STANDARDS MEETS OR EXCEEDS OSHA
145 PSI
SAFETY SOLUTION
ERGONOMIC SOLUTION



FEATURES AND BENEFITS

- **Airflow can be precisely regulated simply by squeezing and releasing the handle**
- **Convenient built-in ring for easy storage**
- **Ergonomically designed non-slip grip to ensure complete safety and handling**
- **Superior durability thanks to the materials used in the manufacturing**
- **Laboratory tested mechanism to resist to more than 100 000 operation cycles**

MATERIALS

Body: Reinforced antishock polyamide
Nozzle: Reinforced antiscratch polyamide
Valve: Reinforced polyamide
Springs: Galvanized steel
Seals: NBR
Connection inset: Brass

SPECIFICATIONS

Maximum Working Pressure: 145 PSI
Temperature range: -15 °C to 70 °C
Connection: 1/4 (F) NPT







Product No	Description	Consumption SCFM*	Decibels*
60.302	With 10 cm (4") tube	6.4	86
60.303	With 30 cm (12") long tube	11.7	103
60.304	With 50 cm (20") long tube	10.4	101
60.315	With Quiet tip	7.4	73
60.316	With Venturi tip	18.4	108

* At 87 PSI

09_06_2016

MAXJET
NON-RESTRICTED BLOW GUNS

150 PSI

ERGONOMIC SOLUTION

FEATURES AND BENEFITS

- Powerful airflow that provides a narrow, high velocity jet of air
- Trigger action provides progressive airflow adjustment
- Ergonomic design reduces fatigue and carpal tunnel syndrome
- Plastic tip eleminates scratching of delicate surfaces



SPECIFICATIONS

Maximum Operating Pressure: 150 PSI

Connection: 1/4 (F) NPT

WARNING

MAXJET plastic blow guns do not have a safety by-pass and must be used on air lines which have a pressure regulator (such as a 62.202) set at a maximum of 30 PSI to conform to OSHA and other safety agencies' standards.

See page 375 for more details

Product No	Description
60.322	With standard tip • 10 cm (4") Tube
60.324	With 51 cm (20") long tube
60.332	With anti-scratch tip • 10 cm (4") Tube

MAXJET
BLOW GUN AND INTERCHANGEABLE TIPS KIT

150 PSI



FEATURES AND BENEFITS

- Maximum blow gun versatility with 9 tip options
- Maximum utility with 2 different blow gun bodies
- Each tip fits both blow gun bodies with a convenient, quick coupler style connection
- Ergonomic blow gun body provides a narrow, high velocity jet of air
- Compact blow gun body provides long-lasting, rugged performance

SPECIFICATIONS

Maximum operating pressure: 150 PSI

Connection: 1/4 (F) NPT

INCLUDED IN THE KIT:

- Plastic-body ergonomic blow gun with quick coupler style connection for tips
- Compact metal blow gun with quick coupler style connection for tips
- **1/4 INDUSTRIAL** plug, 1/4 (M) NPT
- Plastic safety tip
- Safety booster tip
- Rubber tip
- Inflator needle tip
- Aerosol spray nozzle tip
- Siphon tip
- 8 cm needle extension tip
- 10 cm extension tip
- 15 cm safety extension tip

Product No	Description
60.550	12 piece blow gun kit

TOPGUN
SAFETY BLOW GUNS

GENERAL FEATURES AND BENEFITS

AIRFLOW ADJUSTMENT
- Control mechanism allows progressive airflow adjustment
- Airflow can be regulated simply by squeezing and releasing the handle

HIGH OUTPUT PERFORMANCE
- High flow for maximum blowing power

SAFETY BLOW GUNS
- These guns are manufactured to meet OSHA and other Safety Agencies' requirements, ensuring maximum output pressure of 30 PSI even with complete obstruction to a pressure of 120 PSI

ROBUST AND POWERFUL
- Composite material construction provides maximum durability
- Very resistant aluminium body

FACILITATE STORAGE
- Convenient built-in hook to facilitate storage

LONG TUBE MODELS
- Choices of various lengths of tube for hard-to-reach locations

ERGONOMIC
- Ergonomic design with lever for quick, comfortable grip, easy to squeeze even during prolonged use



APPLICATIONS

Machine and woodworking shops

Industries and shops: construction, transportation, food, paper and textile, foundries, rubber and plastic manufacturing

General clean-up and maintenance

MATERIALS

Body: Cast aluminium

Nozzle: Aluminium or brass

Extention: Aircraft grade aluminium

Valve: Brass

Springs: Stainless steel

Seals: Buna-N/Nitrile

SPECIFICATIONS

Maximum Operating Pressure: 120 PSI

Temperature Range: -40 °C to 65 °C

Connection: 1/4 (F) NPT

WARNING

Under no circumstances should a blow gun be used to clean workers' clothes or body. A vacuum should be used instead.

TOPGUN
PROTECTIVE AIR SCREEN SAFETY BLOW GUNS

OSHA STANDARDS MEETS OR EXCEEDS OSHA
120 PSI
SAFETY SOLUTION
ERGONOMIC SOLUTION

FEATURES AND BENEFITS

- Deliver high thrust with pinpoint accuracy
- Protective air cone protects workers against dangerous "chip fly-back"
- Limit static pressure to 30 PSI when tip is blocked
- Airflow control throttle screw model provides lower independent airflow for delicate jobs (60.405)
- 15 cm brass tube with 1/8" O.D. flexible tube for blind holes (60.475)

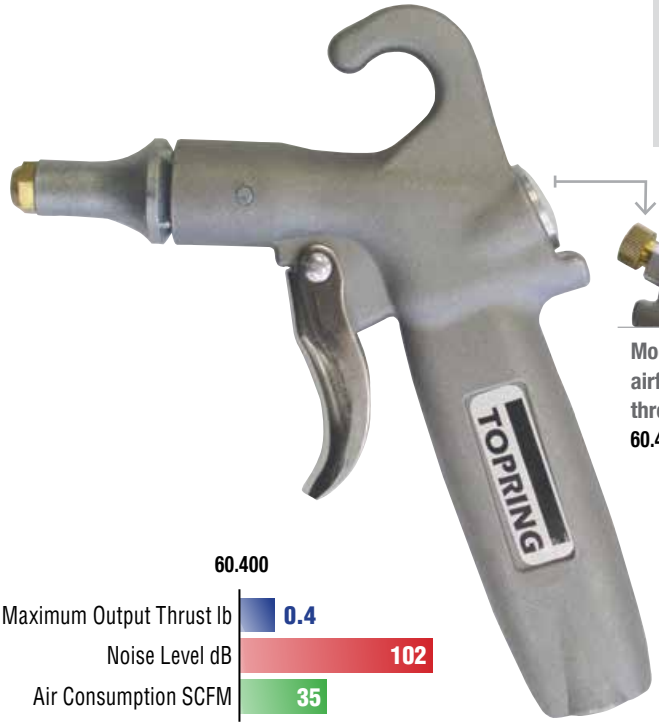



Model with airflow control throttle screw
60.405

60.400

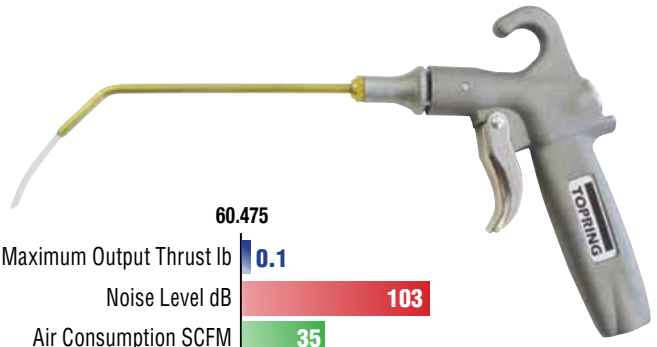

60.475

PROTECTIVE AIR SCREEN

During normal operation, the main flow of air exits through the nozzle tip and full plant air pressure is available to move and dislodge debris. In addition, a small portion of the main flow is diverted through slots around the periphery of the nozzle to form a protective air screen. This protective air screen helps prevent chips and other debris from blowing back towards the operator.

Should the tip become blocked, the entire air flow is diverted through the slots.



Therefore the pressure at the nozzle tip is held to less than 30 PSI, satisfying OSHA safety standards.





Specially designed to clean out blind holes in metal, plastic and wood work pieces.

APPLICATIONS

Cleaning of machine tools, woodworking tools, textile and other production equipment

SPECIFICATIONS

Maximum Output Thrust: 60.400 and 60.405: 0.4 lb
60.475: 0.1 lb

Noise Level: 60.400 and 60.405: 102 dB • 60.475: 103 dB

Air Consumption: 35 SCFM

Maximum Operating Pressure: 120 PSI

Product No	Description
60.400	Short tip
60.405	Short tip with airflow control throttle screw
60.475	Tip for blind holes (15 cm tube)

For applications, materials and specifications, see page 346

TOPGUN
BOOSTER SAFETY BLOW GUNS WITH VENTURI NOZZLE

120 PSI

ERGONOMIC SOLUTION

OSHA MEETS OR EXCEEDS OSHA STANDARDS

SAFETY SOLUTION

FEATURES AND BENEFITS

- **Designed for moving large volumes of debris using air at standard shop pressures**
- **Venturi tip increases thrust and limits static pressure to less than 30 PSI when tip is blocked**

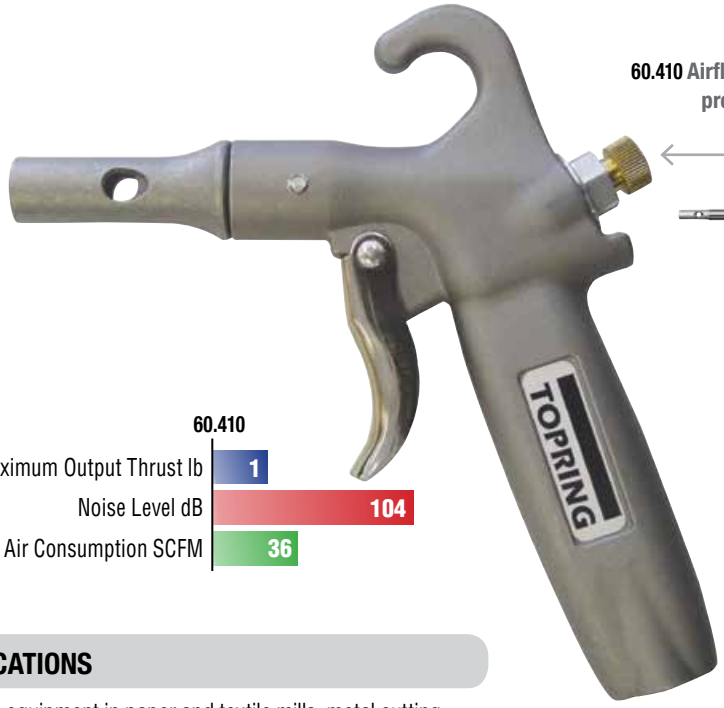

60.410 Airflow control throttle screw provides lower independent airflow for delicate jobs



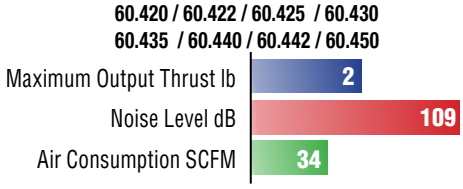

APPLICATIONS

Cleaning equipment in paper and textile mills, metal cutting and wood-working equipment

Blow guns with long tubes for hard-to-reach spaces: for blowing floor debris into piles, cleaning masonry forms, tanks, ovens, large molds, as well as machinery and storage areas

SPECIFICATIONS

Maximum Output Thrust: 60.410: 1 lb / Long tubes: 2 lb

Noise Level: 60.410: 104 dB / Long tubes: 109 dB

Air Consumption: 60.410: 36 SCFM / Long tubes: 34 SCFM

Maximum Operating Pressure: 120 PSI

VENTURI TIP SERVES 2 PURPOSES







Main airflow speeds up as it passes through the nozzle, drawing in ambient air through the two side ports. The increased velocity and increased volume of air exiting the nozzle amplify the thrust.

Should the nozzle tip become blocked, all of the main airflow exits through the side ports. Static pressure at the nozzle tip is held to less than 30 PSI satisfying OSHA safety Standards.



Long tube for hard to reach spaces

Product No	Description
60.410	Short tip with airflow throttle screw
60.450	With 15 cm (6") tube
60.420	With 30 cm (12") tube
60.422	With 45 cm (18") tube
60.425	With 60 cm (24") tube
60.430	With 90 cm (36") tube
60.435	With 120 cm (48") tube
60.440	With 152 cm (60") tube
60.442	With 182 cm (72") tube

For applications, materials and specifications, see page 346

TOPGUN
WHISPER JET SAFETY BLOW GUNS WITH COANDA NOZZLE

120 PSI
ERGONOMIC SOLUTION
OSHA
SAFETY SOLUTION
QUIET

FEATURES AND BENEFITS

- Provides extra high thrust with reduced air consumption
- Unique Coanda nozzle design reduces noise by up to 6 to 20 dB over conventional blow guns
- Solid conical tip design prevents blockage of nozzle
- Ergonomic pistol grip and trigger eliminate hand fatigue





60.415

60.416 / 60.418 / 60.419

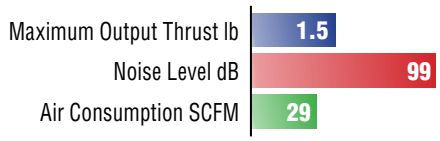

APPLICATIONS

Cleaning equipment in paper and textile mills, metal cutting and wood-working equipment

Blow guns with long tubes for hard-to-reach spaces: for blowing floor debris into piles, cleaning masonry forms, tanks, ovens, large molds, as well as machinery and storage areas

SPECIFICATIONS

Maximum Output Thrust: 60.415: 1.1 lb / Long tubes: 1.5 lb
Noise Level: 60.415: 93 dB / Long tubes: 99 dB
Air Consumption: 60.415: 21 SCFM / Long tubes: 29 SCFM
Maximum Operating Pressure: 120 PSI

COANDA NOZZLE



High speed jets of air issuing from the narrow slots around the periphery of the nozzle adhere to the conical nozzle tip surface. This primary airflow draws in a large amount of surrounding air.

The net result is increased thrust at lower noise levels and savings of expensive compressed air. The solid conical tip physically prevents blockage thereby satisfying OSHA safety standards.

For applications, materials and specifications, see page 346



Long tube for places for difficult to reach

Product No	Description
60.415	Short tip
60.416	With 30 cm (12") tube
60.418	With 60 cm (24") tube
60.419	With 90 cm (36") tube

TOPGUN
EXTRA THRUST SAFETY BLOW GUNS WITH VENTURI NOZZLE

120 PSI

ERGONOMIC SOLUTION

OSHA

SAFETY SOLUTION

FEATURES AND BENEFITS

- **Designed to quickly move large volumes of debris**
- **Extra thrust venturi tip increases thrust and limits static pressure to less than 30 PSI when tip is blocked**
- **Rugged, cast aluminium body with pistol-grip handle and full-length trigger**

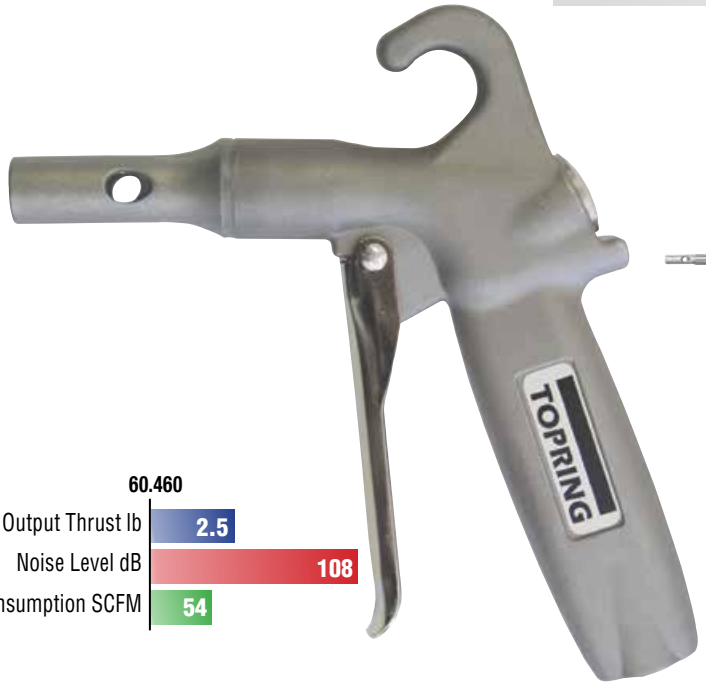



60.462 / 60.465 / 60.467 / 60.470
60.471 / 60.472 / 60.473 / 60.474

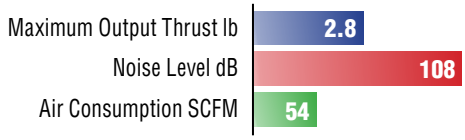

60.460

APPLICATIONS

Short nozzle: cleaning equipment in paper and textile mills, metal cutting and wood-working equipment

Blow guns with long tubes for hard-to-reach spaces: for foundries, lumber mills, and for conveyors and heavy equipment

SPECIFICATIONS

Maximum Output Thrust: 60.460: 2.5 lb / Long tubes: 2.8 lb

Noise Level: 108 dB

Air Consumption: 54 SCFM

Maximum Operating Pressure: 120 PSI

VENTURI TIP SERVES 2 PURPOSES







Main airflow speeds up as it passes through the nozzle, drawing in ambient air through the two side ports. The increased velocity and increased volume of air exiting the nozzle amplify the thrust.

Should the nozzle tip become blocked, all of the main airflow exits through the side ports. Static pressure at the nozzle tip is held to less than 30 PSI satisfying OSHA safety Standards.

TECH TIP

A high flow coupler and plug are required to insure optimum performance.
SEE SERIES 31

Product No	Description
60.460	Short nozzle
60.462	With 15 cm (6") tube
60.465	With 30 cm (12") tube
60.467	With 45 cm (18") tube
60.470	With 60 cm (24") tube
60.471	With 90 cm (36") tube
60.472	With 120 cm (48") tube
60.473	With 152 cm (60") tube
60.474	With 182 cm (72") tube

For applications, materials and specifications, see page 346

REPLACEMENT PARTS FOR BLOW GUNS TOPGUN

TOPGUN safety blow guns are repairable.
Both valve repair kits and replacement nozzles are available for most models.





Replacement nozzle 60.490



Valve repair kit 60.498

Product No	Description	Replacement Nozze	Valve Repair Kits
60.400	Protective air screen gun	-	60.498
60.405	Protective air screen gun / with airflow control	-	60.499
60.475	Blind hole air gun	-	60.498
60.410	Venturi tip booster air gun	-	60.499
60.450	Venturi tip booster air gun, 15 cm tube (6")	60.490	60.498
60.420	Venturi tip booster air gun, 30 cm tube (12")	60.490	60.498
60.422	Venturi tip booster air gun, 45 cm tube (18")	60.490	60.498
60.425	Venturi tip booster air gun, 60 cm tube (24")	60.490	60.498
60.430	Venturi tip booster air gun, 90 cm tube (36")	60.490	60.498
60.435	Venturi tip booster air gun, 120 cm tube (48")	60.490	60.498
60.440	Venturi tip booster air gun, 152 cm tube (60")	60.490	60.498
60.442	Venturi tip booster air gun, 182 cm tube (72")	60.490	60.498
60.415	Whisper jet air gun	-	60.498
60.416	Whisper jet air gun, 30 cm tube (12")	-	60.498
60.418	Whisper jet air gun, 60 cm tube (24")	-	60.498
60.419	Whisper jet air gun, 90 cm tube (36")	-	60.498
60.460	Extra thrust venturi tip air gun	60.491	60.498
60.462	Extra thrust venturi tip air gun, 15 cm tube (6")	60.491	60.498
60.465	Extra thrust venturi tip air gun, 30 cm tube (12")	60.491	60.498
60.470	Extra thrust venturi tip air gun, 60 cm tube (24")	60.491	60.498
60.471	Extra thrust venturi tip air gun, 90 cm tube (36")	60.491	60.498
60.472	Extra thrust venturi tip air gun, 120 cm tube (48")	60.491	60.498
60.473	Extra thrust venturi tip air gun, 152 cm tube (60")	60.491	60.498
60.474	Extra thrust venturi tip air gun, 182 cm tube (72")	60.491	60.498

MAXPRO
SAFETY HIGH FLOW BLOW GUNS
WITH VENTURI NOZZLE

OSHA EXCEEDS OR MEETS STANDARDS
120 PSI
SAFETY SOLUTION
ERGONOMIC SOLUTION

FEATURES AND BENEFITS

- Airflow regulated simply by squeezing and releasing the handle
- Robust and powerful safety blow guns
- Designed to quickly move large volumes of debris
- Provides maximum thrust from available air
- Lightweight cast aluminium pistol-style body
- Cushioned handle provides better control and comfort
- Integrated hook for convenient storage

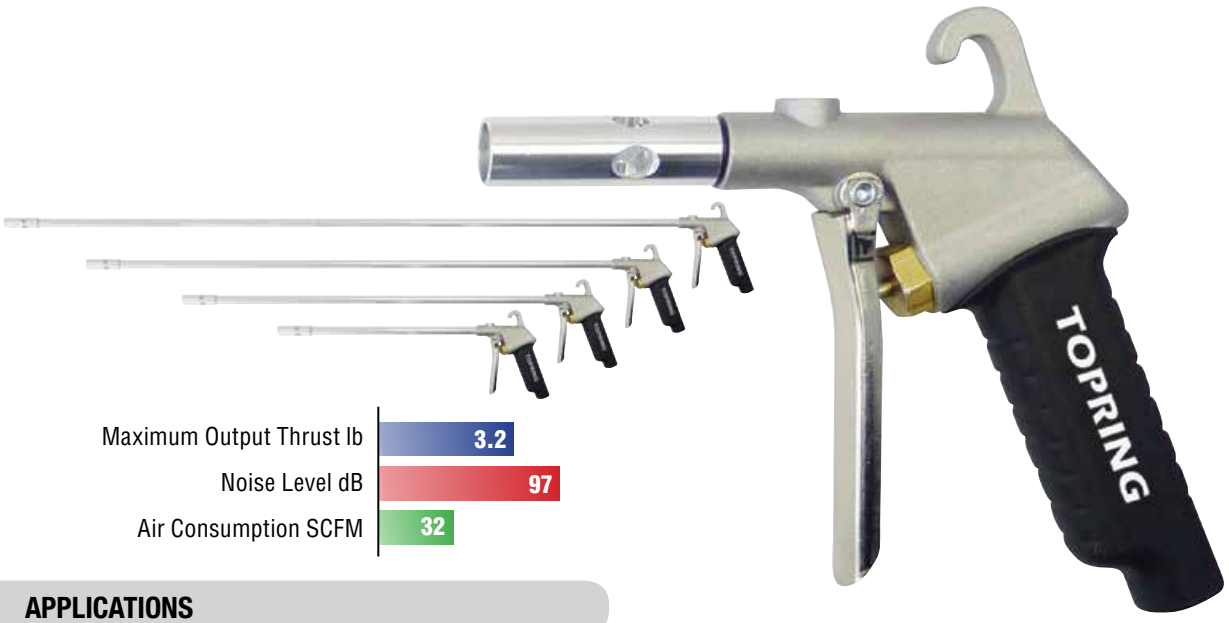

APPLICATIONS

Machine and woodworking shops, construction, lumber mills, paper and textile mills, foundries, transportation, bakeries and food processing, rubber and plastic manufacturing plants, general cleanup and maintenance

MATERIALS

Body and Nozzle: Aluminium
Valve: Brass and nickel plated steel
Springs: Stainless steel
Seals: EPDM and NBR
Cushioned Handle: Polymer

SPECIFICATIONS

Maximum Output Thrust: 3.2 lb
Noise Level: 97 dB
Air Consumption: 32 SCFM
Maximum Working Pressure: 120 PSI
Connection: 1/4 (F) NPT

VENTURI TIP SERVES 2 PURPOSES

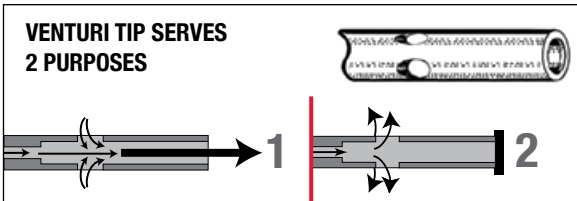

Main airflow speeds up as it passes through the nozzle, drawing in ambient air through the four side ports. The increased velocity and increased volume of air exiting the nozzle amplify the thrust.

Should the nozzle tip become blocked, all of the main airflow exits through the side ports. Static pressure at the nozzle tip is held to less than 30 PSI, thereby satisfying OSHA Safety Standards.

Product No	Description
60.561	With short tip
60.563	With 30 cm tube (12")
60.564	With 60 cm tube (24")
60.565	With 90 cm tube (36")
60.566	With 120 cm tube (48")

MAXPRO
SAFETY HIGH FLOW BLOW GUNS WITH AIRFLOW CONTROL NOZZLE

OSHA STANDARDS MEETS OR EXCEEDS OSHA STANDARDS
120 PSI
SAFETY SOLUTION
ERGONOMIC SOLUTION

FEATURES AND BENEFITS

- Adjustable nozzle for accurate airflow control
- Airflow regulated simply by squeezing and releasing the handle
- Lightweight cast aluminium pistol-style body
- Cushioned handle provides better control and comfort
- Integrated hook for convenient storage



Adjustable nozzle for accurate airflow



Should tip become blocked, the main airflow will keep the static pressure under 30 PSI





APPLICATIONS

Machine and woodworking shops, construction, lumber mills, paper and textile mills, foundries, transportation, bakeries and food processing, rubber and plastic manufacturing plants, general cleanup and maintenance

MATERIALS

Body and Nozzle: Aluminium
Valve: Brass and nickel plated steel
Springs: Stainless steel
Seals: EPDM and NBR
Cushioned Handle: Polymer

SPECIFICATIONS

Maximum Output Thrust: 3.2 lb
Noise Level: 92 dB
Air Consumption: 32 SCFM
Maximum Working Pressure: 120 PSI
Connection: 1/4 (F) NPT

Product No	Description
60.575	Safety high flow with standard nozzle
60.576	Safety high flow with 5.4 mm x 10 cm (4") nozzle

MAXPRO
SAFETY HIGH FLOW BLOW GUNS WITH NOZZLE FOR TIGHT SPACES

OSHA MEETS OR EXCEEDS OSHA STANDARDS · 120 PSI · SAFETY SOLUTION · ERGONOMIC SOLUTION

FEATURES AND BENEFITS

- Airflow regulated simply by squeezing and releasing the handle
- Narrow nozzle to access tight spaces
- Lightweight cast aluminium pistol-style body
- Cushioned handle provides better control and comfort
- Integrated hook for convenient storage

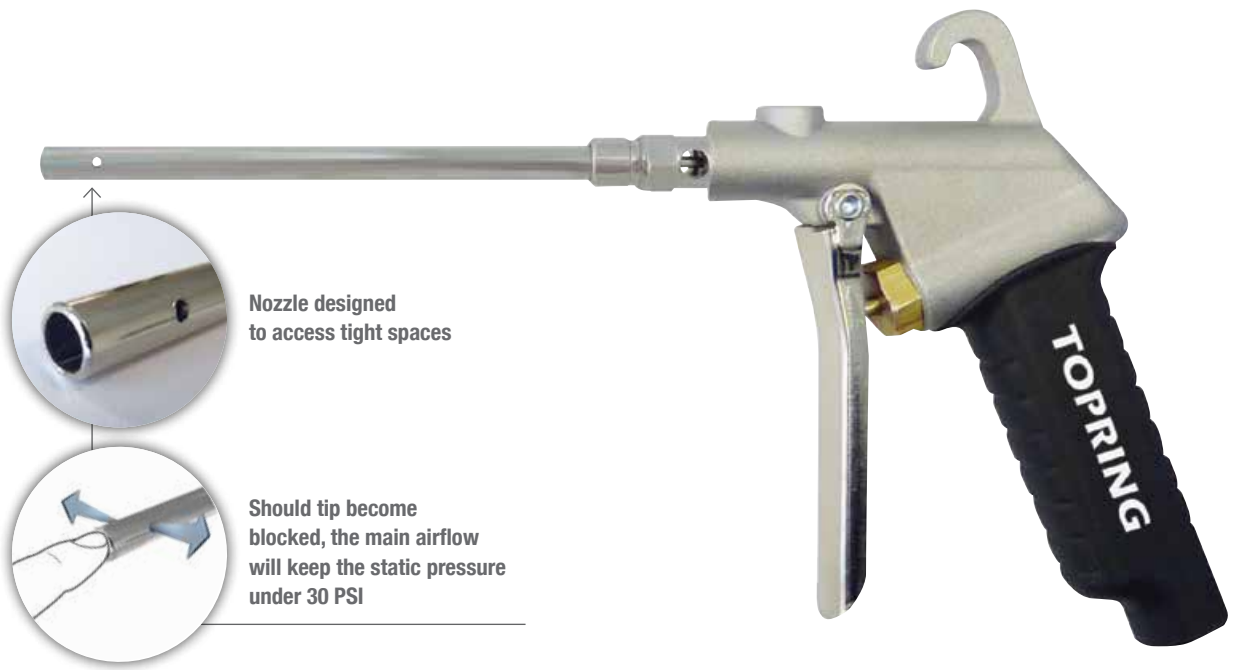

APPLICATIONS

Machine and woodworking shops, construction, lumber mills, paper and textile mills, foundries, transportation, bakeries and food processing, rubber and plastic manufacturing plants, general cleanup and maintenance

MATERIALS

Body and Nozzle: Aluminium
Valve: Brass and nickel plated steel
Springs: Stainless steel
Seals: EPDM and NBR
Cushioned Handle: Polymer

SPECIFICATIONS

Maximum Output Thrust: 3.2 lb
Noise Level: 97 dB
Air Consumption: 32 SCFM
Maximum Working Pressure: 120 PSI
Connection: 1/4 (F) NPT



Product No	Description
60.577	Safety high flow with narrow nozzle 7.9 mm x 15 cm (6")
60.578	Safety high flow with narrow nozzle 7.9 mm x 25 cm (10")

MAXPRO
SAFETY HIGH FLOW EXTRA THRUST BLOW GUN WITH StarTip NOZZLE

OSHA STANDARDS MEETS OR EXCEEDS OSHA STANDARDS
120 PSI
SAFETY SOLUTION
ERGONOMIC SOLUTION

FEATURES AND BENEFITS

- Airflow regulated simply by squeezing and releasing the handle
- Lightweight cast aluminium pistol-style body
- Cushioned handle provides better control and comfort
- Integrated hook for convenient storage
- Slim tip allows access to tight spaces

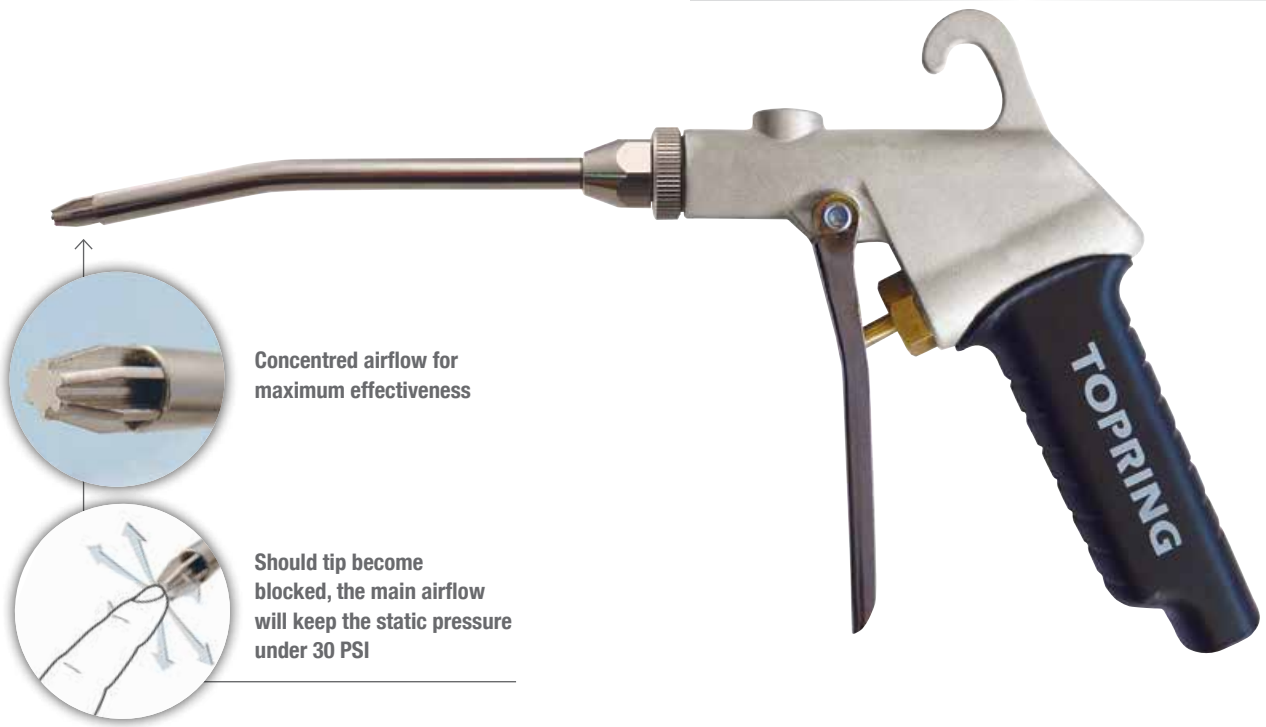

Concentred airflow for maximum effectiveness

Should tip become blocked, the main airflow will keep the static pressure under 30 PSI



APPLICATIONS

Machine and woodworking shops, construction, lumber mills, paper and textile mills, foundries, transportation, bakeries and food processing, rubber and plastic manufacturing plants, general cleanup and maintenance

MATERIALS

Body and Nozzle: Aluminium
Valve: Brass and nickel plated steel
Springs: Stainless steel
Seals: EPDM and NBR
Cushioned Handle: Polymer

SPECIFICATIONS

Maximum Output Thrust: 3.2 lb
Noise Level: 88 dB
Air Consumption: 32 SCFM
Maximum Working Pressure: 120 PSI
Connection: 1/4 (F) NPT

Product No	Description
60.589	Safety high flow with Startip nozzle

MAXPRO
SAFETY HIGH FLOW BLOW GUN WITH AIR SCREEN NOZZLE

OSHA STANDARDS MEETS OR EXCEEDS OSHA
120 PSI
SAFETY SOLUTION
ERGONOMIC SOLUTION

FEATURES AND BENEFITS

- Airflow regulated simply by squeezing and releasing the handle
- Lightweight cast aluminium pistol-style body
- Cushioned handle provides better control and comfort
- Integrated hook for convenient storage



Deliver high thrust with pinpoint accuracy



Protective air screen protects worker's from chip fly-back



Should tip become blocked, the main airflow exits through the side ports, keeping static pressure under 30 PSI



APPLICATIONS

Machine and woodworking shops, construction, lumber mills, paper and textile mills, foundries, transportation, bakeries and food processing, rubber and plastic manufacturing plants, general cleanup and maintenance

MATERIALS

Body and Nozzle : Aluminium
Valve: Brass and nickel plated steel
Springs: Stainless steel
Seals: EPDM and NBR
Cushioned Handle: Polymer

SPECIFICATIONS

Maximum Output Thrust: 3.2 lb
Noise Level: 88 dB
Air Consumption: 32 SCFM
Maximum Working Pressure: 120 PSI
Connection: 1/4 (F) NPT



Product No	Description
60.571	Safety tip with air screen nozzle

MAGNUM
EXTRA THRUST LONG SAFETY BLOW GUNS WITH VENTURI NOZZLE

OSHA STANDARDS MEETS OR EXCEEDS OSHA
120 PSI
SAFETY SOLUTION
ERGONOMIC SOLUTION

FEATURES AND BENEFITS

- Wide trigger for smoother actuation of airflow regulated simply by squeezing and releasing the handle
- Extra thrust Venturi nozzle boosts the volume of air
- Cast aluminium body with premium cushion grip
- The ergonomic design and the very light aluminium body help to reduce fatigue
- Large adjustable hook for convenient storage





APPLICATIONS

Cleaning equipment in paper and textile mills, metal cutting and wood-working equipment, blowing floor debris into piles, cleaning masonry forms, tanks, ovens, large moulds, cleaning machinery, cleaning storage areas, all applications where maximum blow gun thrust is required



MATERIALS

Body and Nozzle: Aluminium

SPECIFICATIONS

Maximum Output Thrust: 3.3 lb
Noise Level: 101 dB
Air Consumption: 66 SCFM
Maximum Working Pressure: 120 PSI
Working Temperature : -40 °C to 65 °C
Connection: 3/8 (F) NPT

Product No	Description
60.620	With 30 cm tube (12")
60.625	With 60 cm tube (24")
60.630	With 90 cm tube (36")
60.632	With 120 cm tube (48")
60.634	With 152 cm tube (60")
60.635	With 182 cm tube (72")

VENTURI TIP SERVES 2 PURPOSES

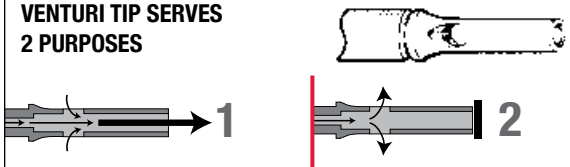

Main airflow speeds up as it passes through the nozzle, drawing in ambient air through the two side ports. The increased velocity and increased volume of air exiting the nozzle amplify the thrust.

Should the nozzle tip become blocked, all of the main airflow exits through the side ports. Static pressure at the nozzle tip is held to less than 30 PSI, thereby satisfying OSHA Safety Standards.

COMPACT SAFETY BLOW GUNS

GENERAL FEATURES AND BENEFITS

- Designed for extended heavy-duty service
- Flow stabilizer valve for precise air control
- Contoured design comfortably fits operator's hand
- Cushioned thumb lever
- Large hanging hook
- Rugged and lightweight one piece body
- Safety yellow color

MATERIALS

Body and Handle: Zinc
Nozzle and Valve: Brass

SPECIFICATIONS

Maximum Operating Pressure: 150 PSI
Temperature Range: 0 °C to 79 °C

Permatip BLOW GUN

150 PSI

SAFETY SOLUTION



FEATURES AND BENEFITS

- Tamper-proof vent holes increase total airflow
- Case-hardened steel restrictor inside the gun provides a concentrated air stream

APPLICATIONS

Industrial and automotive shops

General purpose safety gun for blowing away dust, metal chips, wood chips, etc

Product No	Noise level *	Air consumption
60.100	89 dB	2.5 SCFM

* At 75 PSI air line pressure

COMPACT AIR SCREEN SAFETY BLOW GUN

150 PSI

SAFETY SOLUTION



FEATURES AND BENEFITS

- Brass air-screen tip produces 30° conical air stream around direct center air stream. Deflects chips and particles away from operator's eyes and face

APPLICATIONS

Machine, tool and die and woodworking shops where drilled or tapped blind holes must be blown out, causing chip and particle blow-back

Product No	Noise level *	Air consumption
60.102	89 dB	3.5 SCFM

* At 75 PSI air line pressure

SAFETY BLOW GUN
VENTURI BOOSTER TIP

150 PSI

SAFETY SOLUTION

FEATURES AND BENEFITS

- **Brass venturi booster tip**
- **Provides extra thrust with reduced air consumption**



APPLICATIONS

Industrial and automotive shops

Product No	Noise level *	Air consumption
60.103	89 dB	2.5 SCFM

* At 75 PSI air line pressure

LONG TUBE
SAFETY BLOW GUN

150 PSI

SAFETY SOLUTION

APPLICATIONS

Allows chip removal in remote or hard to reach applications



Product No	Description
60.114	With 8 cm tube (3")
60.116	With 15 cm tube (6")
60.118	With 30 cm tube (12")

COMPACT
NON-RESTRICTED BLOW GUNS

WARNING

TOPRING non-restricted blow guns do not have a safety by-pass and must be used on air lines which have a pressure regulator (such as 62.202) set at a maximum of 30 PSI to conform to OSHA and other Safety Agencies' standards.

RUBBER TIP BLOW GUN

150 PSI

Rubber anti-scratch tapered tip for leak-proof connection



APPLICATIONS

Automotive and industrial applications

Ideal for blowing out passages such as automatic transmissions lines, carburator lines, molds and dies

Also excellent for blowing out cavities or surfaces that could be damaged or scratched by metal tips

Product No	Description
60.110	With rubber tip

TAPERED TIP BLOW GUN

150 PSI

Concentrates air stream for efficient removal of dust, metal chips and wood chips

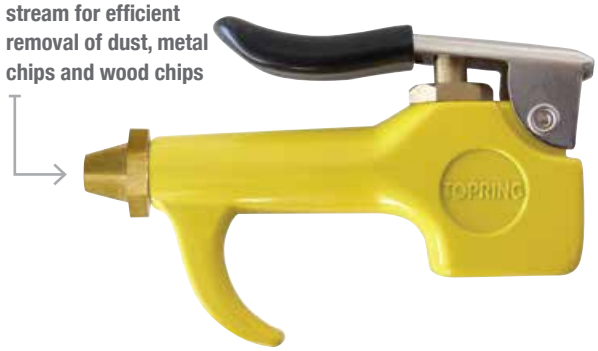

APPLICATIONS

Ideal for industrial applications

Product No	Description
60.112	With tapered tip

SIPHON TIP BLOW GUN

150 PSI

APPLICATIONS

Excellent economical tool for spraying oils, cleaners, solvents, and sealants

FEATURES AND BENEFITS

- **Compact spray gun**
- **Includes a 2.4 m suction tube and 15 cm (6") tip extension**



Product No	Description
60.130	With siphon tip

BASIC BLOW GUN
WITHOUT NOZZLE

150 PSI



FEATURES AND BENEFITS

- **Threaded end ideal for use with various blow gun nozzles**

APPLICATIONS

Automotive and industrial applications

Product No	Description
60.120	Blow gun without nozzle



Allows use of any nozzle on this page

NOZZLES FOR BASIC BLOW GUN BODY



Product No	Description
60.200	Tapered nozzle



Product No	Description
60.215	Spray nozzle



Product No	Description
60.245	Safety nozzle



Product No	Description
60.205	Air screen safety nozzle



Product No	Description
60.220	8 cm safety tube (3")
60.230	15 cm safety tube (6")
60.235	30 cm safety tube (12")



Product No	Description
60.250	Needle nozzle



Product No	Description
60.210	Rubber nozzle



Product No	Description
60.240	Safety booster nozzle



Product No	Description
60.255	Long needle nozzle

SaveAir® IN-LINE PRE-SET ENERGY SAVING MINIATURE REGULATOR

62.202
Factory-set pressure of 27 PSI



See page 375 for more details

MAXJET
BLOW GUN WITH 4 NOZZLES

150 PSI

ERGONOMIC SOLUTION

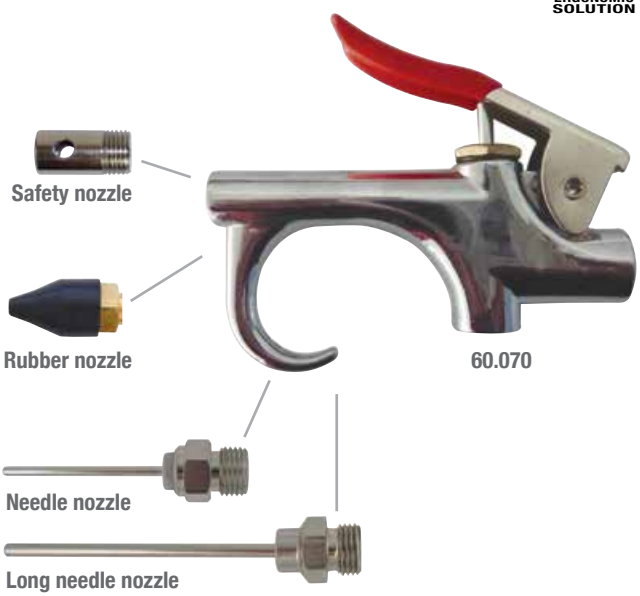

FEATURES AND BENEFITS

- Designed for light-duty applications
- Contoured design fits comfortably in operator's hand
- Cushioned thumb lever
- Large hanging hook
- Lightweight zinc body
- Brass valve with only one moving part for long-lasting maintenance-free operation
- Connection: 1/4 (F) NPT
- Safe when used with safety nozzle

APPLICATIONS

Drying, cleaning of parts, cleaning surfaces before painting

Product No	Description
60.070	With 4 interchangeable nozzles

MAXJET COMPACT BLOW GUN & ACCESSORIES

Product No	Description
01.400K	Blow gun and accessories



BLOW GUN WITH SAFETY TIP

150 PSI

SAFETY SOLUTION



FEATURES AND BENEFITS

- Safety tip prevents blockage
- Connection: 1/4 (F) NPT

APPLICATIONS

Drying, cleaning of parts, cleaning surfaces before painting

Product No	Description
60.050	Blow gun with safety tip

PENCIL STYLE BLOW GUNS

150 PSI



60.005



60.010

FEATURES AND BENEFITS

- Provide a narrow, high velocity jet of air
- Compact and light, fit into a shirt pocket like a pen
- Twist to adjust flow

Product No	Description
60.005	1/4 INDUSTRIAL plug
60.010	ARO 210 plug

LAZER
HIGH PERFORMANCE COMPACT SAFETY BLOW GUNS WITH VENTURI NOZZLE

120 PSI

OSHA MEETS OR EXCEEDS OSHA STANDARDS

ERGONOMIC SOLUTION

SAFETY SOLUTION

FEATURES AND BENEFITS

- Designed to move large volumes of debris using standard shop pressures
- Ergonomically designed to reduce hand fatigue and help minimize Carpal Tunnel Syndrome
- Unique patented design, safe and trouble-free
- Lightweight, rugged, cast aluminium body with rubber over-moulded trigger
- Venturi tip increases thrust and limits static pressure to less than 30 PSI when blocked





60.150



60.160 / 60.162 / 60.163 / 60.164 / 60.166

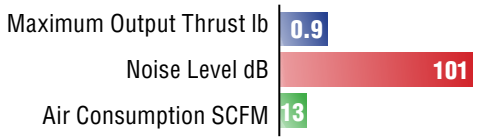

APPLICATIONS

Clearing away chips and shavings, cleaning of parts and machines, blowing, drying and dust removal from parts and work areas and general clean-up and maintenance

Long tubes for blowing floor debris into piles, cleaning masonry forms, tanks, ovens, large molds, as well as machinery and storage areas



MATERIALS

Body: Aluminium

Nozzle: Brass

SPECIFICATIONS

Maximum Output Thrust: 60.150 : 0.6 lb / long tubes 0.9 lb
Noise Level: 60.150 : 100 dB / long tubes 101 dB
Air Consumption: 60.150 : 8 SCFM / long tubes 13 SCFM

Maximum Operating Pressure: 120 PSI

Temperature Range: -40 °C to 65 °C

Connection: 1/4 (F) NPT

Product No	Description
60.150	Short nozzle
60.160	With 15 cm tube (6")
60.162	With 30 cm tube (12")
60.163	With 45 cm tube (18")
60.164	With 60 cm tube (24")
60.166	With 90 cm tube (36")

27_05_2016

VENTURI TIP SERVES 2 PURPOSES





Main airflow speeds up as it passes through the nozzle, drawing in ambient air through the four side ports.
The increased velocity and increased volume of air exiting the nozzle amplify the thrust.



Should the nozzle tip become blocked, all of the main airflow exits through the side ports.
Static pressure at the nozzle tip is held to less than 30 PSI, thereby satisfying OSHA Safety Standards.

TYPHOON
EXTREME PERFORMANCE AIR GUNS WITH VENTURI NOZZLE

OSHA BENEFITS OR EXCEEDS OSHA STANDARDS · 120 PSI · SAFETY SOLUTION · ERGONOMIC SOLUTION

TYPHOON blow guns are designed to provide 100% of compressor power. In order to do this, airflow must be sufficient from the compressor to the gun.

A minimum 3/4 ID hose and 3/4 safety quick coupler are recommended to ensure maximum performance and safety.

FEATURES AND BENEFITS

- Designed specifically for heavy duty industrial and construction applications
- Quickly move large volumes of debris by delivering 100% of the power provided by the air compressor
- Extremely powerful
- Static pressure limited to less than 30 PSI when tip is blocked
- Rugged all metal construction
- Adjustable auxiliary handle for two-handed operation
- Ergonomic handle also protects trigger from wear and abuse
- Extended trigger allows full hand operation

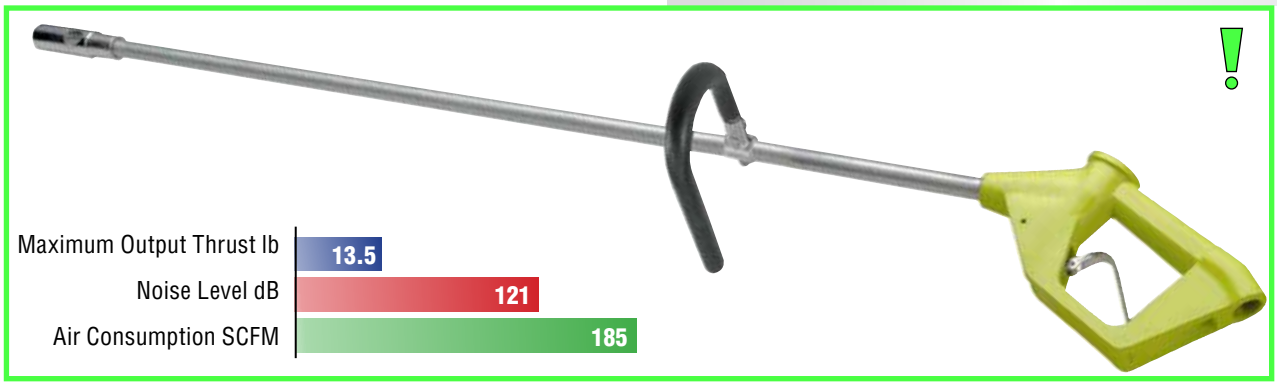

APPLICATIONS

Paper, textile and steel mills, construction sites, all applications where maximum thrust is required



MATERIALS

Body and Nozzle: Aluminium

SPECIFICATIONS

Maximum Output Thrust: 13.5lb
Noise Level: 121 dB
Air Consumption: 185 SCFM
Maximum Operating Pressure: 120 PSI
Temperature Range: -40 °C to 65 °C
Connection: 3/4 (F) NPT

VENTURI TIP SERVES 2 PURPOSES

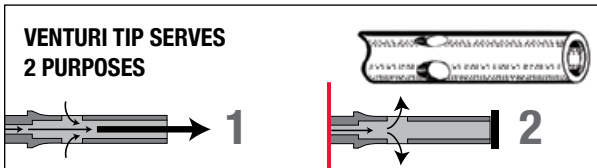

Main airflow speeds up as it passes through the nozzle, drawing in ambient air through the four side ports. The increased velocity and increased volume of air exiting the nozzle amplify the thrust.

Should the nozzle tip become blocked, all of the main airflow exits through the side ports. Static pressure at the nozzle tip is held to less than 30 PSI, thereby satisfying OSHA Safety Standards.

WARNING

It is recommended to use a safety coupler to prevent accidental disconnections



SAFETY COUPLER
No 22.498
3/4 INDUSTRIAL • 3/4 (F) NPT

COMPATIBLE PLUG
No 22.298
3/4 INDUSTRIAL • 3/4 (F) NPT

Product No	Description
60.702	With 60 cm tube (24")
60.703	With 90 cm tube (36")
60.700	With 122 cm tube (48")
60.705	With 183 cm tube (72")

INFORCER
ERGONOMIC EXTREME PERFORMANCE AIR GUNS WITH VENTURI TIP

OSHA STANDARDS MEETS OR EXCEEDS OSHA STANDARDS
150 PSI
SAFETY SOLUTION
ERGONOMIC SOLUTION

INFORCER ergonomic blow guns are specifically designed for intensive uses in industrial applications and construction.

A minimum 3/4 ID hose and 3/4 safety quick coupler are recommended to ensure maximum performance and safety.

FEATURES AND BENEFITS

- **In-line handle improves ergonomics for long term use**
- **Available with chisel-point tip to break up and loosen stubborn debris**
- **Quickly moves large volumes of debris by delivering 100 % of the power provided by the air compressor**
- **In-line handle with hand stop, made from thermally insulating material**
- **Dead-man type trigger reduces fatigue and improves safety by immediately stopping flow when released**
- **Venturi tip nozzle increases thrust while limiting static pressure under 30 PSI when tip is blocked**
- **Aircraft grade aluminium tube for strength and light weight**
- **Adjustable handle for two-handed operation**



APPLICATIONS

Paper, textile and steel mills, construction sites, all applications where maximum thrust is required

MATERIALS

Body and Nozzle: Aluminium

SPECIFICATIONS

Maximum Output Thrust: 12 lb
Noise Level: 121 dB
Maximum Air Consumption: 185 SCFM
Maximum Operating Pressure: 150 PSI
Temperature Range: -40 °C to 65 °C
Connection: 3/4 (F) NPT



VENTURI TIP SERVES 2 PURPOSES

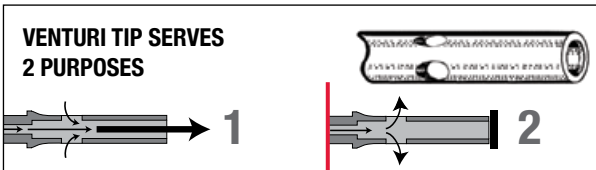

Main airflow speeds up as it passes through the nozzle, drawing in ambient air through the four side ports. The increased velocity and increased volume of air exiting the nozzle amplify the thrust.

Should the nozzle tip become blocked, all of the main airflow exits through the side ports. Static pressure at the nozzle tip is held to less than 30 PSI, thereby satisfying OSHA Safety Standards.

WARNING

It is recommended to use a safety coupler to prevent accidental disconnections



SAFETY COUPLER
No 22.498
3/4 INDUSTRIAL • 3/4 (F) NPT

COMPATIBLE PLUG
No 22.298
3/4 INDUSTRIAL • 3/4 (F) NPT

Product No	Description
60.750	With 122 cm tube (48")
60.760	With 183 cm tube (72")