
TouchNTuff®
ADVANCED PRODUCT & WORKER PROTECTION

# 92-575
Powdered Disposable Nitrile Glove

# Powdered gloves offering robust protection for heavy-duty jobs

- **Powdered design:** TouchNTuff® 92-575 PPE gloves are powdered for moisture absorption and easy donning
- **Strong protection:** Robust and durable, these gloves protect well in tough jobs and resist chemicals in the event of splashes
- **Comfortable nitrile formulation:** Soft nitrile material offers comfort throughout the work day
- **Enhanced grip:** Textured fingertips provide confident grip performance

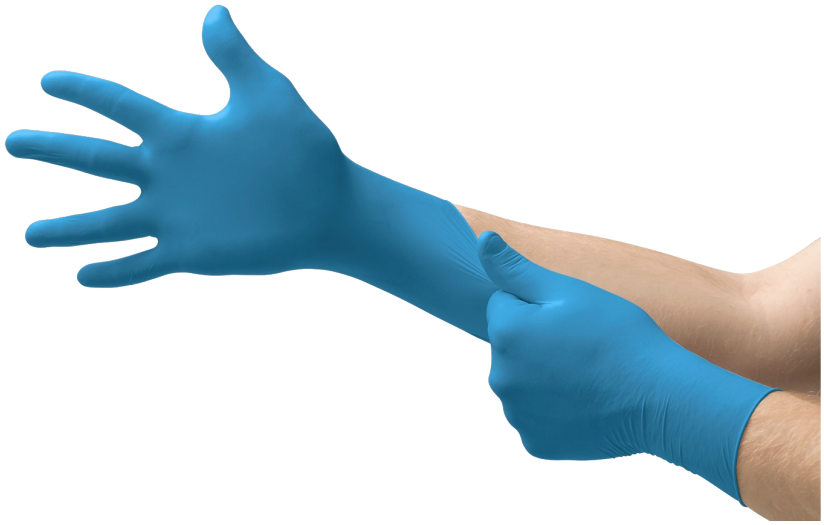

## Industries

- Life Sciences
- Chemical
- Food Processing

## Recommended For

- Transferring liquids and solids
- Sample taking and processing
- Handling incoming goods
- Maintenance
- All food processing, applications that have food contact

# TECHNICAL DATA SHEET

| | Product Information |
|---|---|
| Material | Nitrile |
| External Glove Surface | Textured Fingers |
| Audit Standards | ISO 9001 |
| Product Certification | Category III, EN 420:2003 + A1:2009, EN 374:2003 Low Chemical Resistant, EN 374:2003 Microorganism, EN ISO 374-1:2016 Type B JKPT, EN ISO 374-5:2016 Virus, EN ISO 21420:2020, FDA21 CFR 177-2600-US Food Contact Approved, EU Food Contact Approved, ISO 9001 |
| Packaging Overview | 100 gloves per dispenser<br>10 dispensers per case<br>1000 gloves per case |
| Storage Instructions | Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition. |
| Country Of Origin | Thailand |
| Product Segmentation | Robust |
| Antistatic | Yes |
| Silicone Free | Yes |


## PHYSICAL PROPERTIES

| | Typical Values | | Testing Method |
|---|---|---|---|
| Length (mm/inches) | 240 / 9.5 | | ASTM D3767,ASTM D6977,EN 420 |
| Freedom from Holes (Inspection level I) | 4.0 AQL | | ASTM D5151,EN 455-1 |
| Palm Thickness (mm/mils) | 0.11/ 4.3 | | ASTM D3767,EN 420 |
| Finger Thickness (mm/mils) | 0.14/ 5.5 | | ASTM D3767,EN 420 |
| | **BEFORE AGING** | **AFTER AGING** | |
| Ultimate Tensile Strength (MPa) | ≥ 14 | ≥ 14 | ASTM D412 & D573 |
| Elongation at Break (%) | ≥ 500 | ≥ 400 | ASTM D412 |
| Force at break (N) | ≥ 6 | ≥ 6 | EN 455-2 |

## ORDERING INFORMATION

| Size | S (6.5 - 7) | M (7.5 - 8) | L (8.5 - 9) | XL (9.5 - 10) |
|---|---|---|---|---|
| Product Code | 586193 | 586194 | 586195 | 586196 |

### Performance Standards and Regulatory Compliance




### For additional information visit us at www.ansell.com, or call us at

**Europe, Middle East & Africa Region**
Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00
F: +32 (0) 2 528 74 01

**Asia Pacific Region**
MY +603 8310 6688
apac.medical@ansell.com
CN: +86 21 38275000
infochina@ansell.com
JP: +813 5549 8151
info.medical.jp@ansell.com

**North America Region**
Ansell Healthcare Products LLC
T: +1 800 800 0444
F: +1 800 800 0445

**Latin America & Caribbean Region**
BR +55 (11) 3356-3100
latam.medical@ansell.com
MX: +52 442 296 2050
latam.medical@ansell.com
CO: +57 1 288 3247
latam.medical@ansell.com

**Australia**
Ansell Limited
T: +61 1800 337 041
F: +61 1800 803 578

**Russia**
Ansell PYC
Ten. +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: www.ansell.com/patentmarking © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.