TOW PRO™

TOW PRO TOWING AND ACCESSORIES

Tow Pro Towing & Accessories

TOW PRO™

- Tow hooks
- Trailer balls
- Trailer couplers
- Jacks
- Ropes / straps
- Receiver
- Wheel chocks
- Towing mirrors
- Hitch accessories
- Anchor Winches
- Pull pins
- Connectors



TOW PRO TOWING & ACCESSORIES

Internal Thread Trailer Balls

Solid steel. Bright chrome plated finish. Meets or exceeds VESC V-5 safety specifications.

PART#	BALL DIAMETER	SHANK DIAMETER	SHANK LENGTH	GROSS LOAD RATING
11148	1-7/8”	3/4”	2”	2,000 lb
11149	2”	3/4”	2”	3,500 lb



External Thread Trailer Balls

Solid steel. Bright chrome plated finish. Meets or exceeds VESC V-5 safety specifications.

PART#	BALL DIAMETER	SHANK DIAMETER	SHANK LENGTH	GROSS LOAD RATING
11147	1-7/8”	1”	2-5/8”	3,500 lb
11151	1-7/8”	3/4”	1-1/2”	2,000 lb
11152	2”	3/4”	2”	3,500 lb
11153	2”	1”	2-5/8”	5,000 lb
11154	2-5/16”	1”	2-5/8”	5,000 lb
11155	2-5/16”	1-1/4”	2-5/8”	10,000 lb
11155H	2-5/16”	1-1/4”	2-1/4”	14,000 lb
11155X	2-5/16”	1-1/4”	2”	12,000 lb
11258	2”	1-1/4”	2-1/4”	8,000 lb



Long Shank External Thread Trailer Balls

Solid steel. Bright chrome plated finish. Meets or exceeds VESC V-5 safety specifications.

PART#	BALL DIAMETER	SHANK DIAMETER	SHANK LENGTH	GROSS LOAD RATING
11250	1-7/8”	1”	3”	2,000 lb
11251	1-7/8”	3/4”	3-1/4”	2,000 lb
11252	2”	3/4”	3-1/4”	3,500 lb
11257	2”	1”	3-1/4”	5,000 lb
11263	2-5/16”	1”	3”	6,000 lb



Extra Lift External Thread Trailer Balls

Solid steel. Bright chrome plated finish. Meets or exceeds VESC V-5 safety specifications.

PART#	BALL DIAMETER	SHANK DIAMETER	SHANK LENGTH	RISE HEIGHT	GROSS LOAD RATING
11253	2”	2-5/8"	2-5/8”	1”	3,500 lb
11254	2”	1”	1-3/4”	2”	3,500 lb
11255	2-5/16”	1-1/4”	2-1/4”	1”	7,000 lb
11256	2-5/16”	1-1/4”	2”	2”	5,000 lb



Heavy Duty External Thread Trailer Balls

Solid steel. Black powder coated finish. Meets or exceeds VESC V-5 safety specifications.

PART#	BALL DIAMETER	SHANK DIAMETER	SHANK LENGTH	RISE HEIGHT	GROSS LOAD RATING
11259	2-5/16”	1-1/4”	2-5/8"	Standard	30,000 lb
11260	2-5/16”	1-1/4”	2-5/8"	1”	30,000 lb
11261	2-5/16”	1-1/4”	2-1/2”	2”	30,000 lb



Pictures are not to scale. Sizes are approximate. Specifications subject to change without notice.



Internal Thread Trailer Balls - Retail Packaged

Solid steel. Black powder coated finish. Meets or exceeds VESC V-5 safety specifications.

PART#	BALL DIAMETER	SHANK DIAMETER	SHANK LENGTH	GROSS LOAD RATING
11148P	1-7/8”	3/4”	1-3/4”	2,000 lb
11149P	2”	3/4”	1-3/4”	3,500 lb



External Thread Trailer Balls - Retail Packaged

Solid steel. Black powder coated finish. Meets or exceeds VESC V-5 safety specifications.

PART#	BALL DIAMETER	SHANK DIAMETER	SHANK LENGTH	GROSS LOAD RATING
11147P	1-7/8”	1”	2-5/8”	3,500 lb
11151P	1-7/8”	3/4”	1-1/2”	2,000 lb
11152P	2”	3/4”	1-1/2”	3,500 lb
11153P	2”	1”	2-5/8”	5,000 lb
11154P	2-5/16”	1”	2-5/8”	5,000 lb
11155P	2-5/16”	1-1/4”	2-5/8”	10,000 lb
11155HP	2-5/16”	1-1/4”	2-1/4”	14,000 lb
11155XP	2-5/16”	1-1/4”	2”	12,000 lb
11251P	1-7/8”	3/4”	3-1/4”	2,000 lb
11252P	2”	3/4”	3-1/4”	3,500 lb



Trailer Ball Replacement Holder

Black plastic with generic label.

PART#	DESCRIPTION	FITS
TB001	Small - 6.89” x 2.28” x 2.52”	11148, 11149, 11151, 11152 *(See previous page)*
TB002	Large - 7.36” x 2.64” x 2.99”	11147, 11153, 11154, 11155, 11155H, 11155X *(See previous page)*



Trailer Ball Reducer Bushings

Clamshell packaged.

PART#	DESCRIPTION
11170	Trailer Ball Reducer Bushing, 1” to 3/4”
11171	Trailer Ball Reducer Bushing, 1-1/4” to 1”

TOW-PRO™

Any load. Any where. Any time.

Be a Tow Pro!

Dynaline offers multiple options of Tow Pro merchandisers. Give your customers the products they want from the brand they know and trust. For information see the Merchandiser section at the front of the catalogue.



Pictures are not scale. Sizes are approximate. Specifications subject to change without notice.

Channel Trailer Couplers

Features large trigger-action latch designed for ease of operation. Zinc Plated Finish.Stampled steel constuction. Easy to install. S.A.E. Class 2



PART#	BALL SIZE	CHANNEL SIZE	GROSS LOAD RATING
11156	1-7/8”	2”	2,000 lb
11157	1-7/8”	2-1/2”	2,000 lb
11158	1-7/8”	3”	2,000 lb
11159	2”	2-1/2”	3,500 lb
11159N	2”	2”	3,500 lb
11160	2”	3”	3,500 lb

A-Frame Trailer Couplers

Features large trigger-action latch designed for ease of operation. Zinc plated finish. Stamped steel contruction. Easy to install



PART#	BALL SIZE	TYPE	GROSS LOAD RATING
11161	2”	Standard	5,000 lb
11162	2-5/16”	Standard	10,000 lb

Trailer Coupler Repair Kits

Repair kit available for both 1-7/8” and 2” ball channel couplers. Zinc plate finish.



PART#	DESCRIPTION
11163	For 1-7/8” Ball Channel Coupler
11164	For 2” Ball Channel Coupler

PARTNERS IN CRIME PREVENTION



Universal Trailer Coupler Locks

Prevent theft and protect your property with this *must have* accessory for any trailer owner. Solidly built and tamper-proof, this lock provides peace of mind.

PART#	DESCRIPTION
65085	Light Duty.Fits 1-7/8", 2" and 2-5/16" Couplers.
65086	Heavy Duty . Fits 1-7/8", 2" and 2-5/16" Couplers.

Pictures are not to scale. Sizes are approximate. Specifications subject to change without notice.

TOW PRO

TOW PRO TOWING AND ACCESSORIES

EASE-GUIDE™ TRAILER COUPLERS

Ease-Guide™ trailer couplers are a revolutionary new style of coupler that provide a 5" square area to position your hitchball into rather than positioning directly over top like traditional trailer couplers. This means you don't have to get in and out ofyour vehicle several times to line up your trailer coupler perfectly over your hitch ball. before coupling the trailer to your vehicle. Once you have lowered your trailer equipped with **Ease-Guide™** coupler onto your hitch ball, you simply drive forward and leave the patented holding socket to guide itself onto the hitch ball and then insert the locking pin.



3" Tubular Mount *Ease-Guide* Trailer Couplers

Carbon steel. Black painted.

PART#	BALL SIZE	HITCH PIN	GROSS LOAD RATING
11563	2-5/16"	66254	12,500 lb
11567	2"	66252	9,000 lb



50° A-Frame *Ease-Guide* Trailer Couplers

Carbon steel. Black painted.

PART#	BALL SIZE	HITCH PIN	GROSS LOAD RATING
11564	2-5/16"	66254	12,500 lb
11568	2"	66252	9,000 lb



Vertical Channel Mount *Ease-Guide* Trailer Couplers

Carbon steel. Black painted.

PART#	BALL SIZE	HITCH PIN	GROSS LOAD RATING
11565	2-5/16``	66254	15,000 lb
11569	2``	66252	9,000 lb



Gooseneck *Ease-Guide* Trailer Coupler

Carbon steel.

PART#	BALL SIZE	HITCH PIN	GROSS LOAD RATING
11566	2-5/16``	66253	24,000 lb



Adjustable Trailer Couplers

Carbon steel.

PART#	BALL SIZE	TONGUE WEIGHT	MAX. GROSS LOAD	OVERALL DIMENSIONS
11864	2"	1,000 lb	10,000 lb	9" L x 5-1/2" W
11865	2-5/16"	1,400 lb	14,000 lb	9-1/4" L x 5-3/4" W

Pictures are not scale. Sizes are approximate. Specifications subject to change without notice.

Adjustable Brackets

Designed for adjustable couplers.

PART#	DESCRIPTION	HOLE DIAMETER	CAPACITY	OUTSIDE WIDTH	INSIDE WIDTH	OVERALL LENGTH
11866	12 hole (6 pairs)	5/8”	16,000 lb	3-5/8”	3”	11-1/2”
11867	8 hole (4 pairs)	5/8”	16,000 lb	3-5/8”	3”	7-1/2”



Lifter Coupler Handle

For easy lifting of trailer tongue on small trailers (coupler not included).

PART#	DESCRIPTION
11870	Zinc plated with rubber coating on the handle. Handle attaches to coupler mounting bolts.



Adjustable Tow Bar

Class 3. Adjustable tow bar width of 26” to 41”. Includes 2” coupler and one set of universal bumper brackets. Black powder coated coupler. Base plate may be required.

PART#	DESCRIPTION
11880	Class III, 5,000 lb GVW



TOW-PRO™

Tow Pro products are also available in pre-made or custom merchandisers. Contact your local account manager for more information.

Trailer Couplers

PART#	CONTENTS
00215	Trailer Couplers **Display Board Only**, 24” x 24”
00215K	**Full Trailer Couplers Merchandiser**. Includes 00215 display board, 10 pegs (80004) and product listed below:

PART#	DESCRIPTION	QTY.
11156	For 1-7/8” Trailer Balls, 2” Channel	2 ea.
11157	For 1-7/8” Trailer Balls, 2-1/2” Channel	2 ea.
11158	For 1-7/8” Trailer Balls, 3” Channel	2 ea.
11159	For 2” Trailer Balls, 2-1/2” Channel	2 ea.
11159N	For 2” Trailer Balls, 2” Channel	1 ea.
11160	For 2” Trailer Balls, 3” Channel	2 ea.
11161	For 2” Trailer Balls	1 ea.
66276	Coupler Lock	2 ea.
66277	Coupler and Receiver Lock Set	2 ea.





Pictures are not to scale. Sizes are approximate. Specifications subject to change without notice.

TRAILER LOCKS & PINS
Theft deterent is the primary function of trailer locks. Feel secure knowing your trailer and cargo are safe.



Coupler Lock

PART#	DESCRIPTION	DIAMETER	USABLE LENGTH
66276	Fits all latch-type couplers. Two keys supplied. Yellow dichromate finish Clamshell packaging.	1/4”	7/8” (closed)



Coupler Lock & Receiving Set

PART#	DESCRIPTION	RECEIVER DIAMETER	USABLE LENGTH	COUPLER LOCK	USABLE LENGTH
66277	Fits most receiver hitches and latch-type couplers. Same key fits both locks. Chrome plated Clamshell packaging.	5/8”	2-3/4”	1/4”	1”



Receiver Lock Pins

Two sizes to fit most receiver-type hitches. Two keys supplied. Bright chrome plated pin. Black enamel painted lock body.

PART#	DIAMETER	USABLE LENGTH	TENSILE STRENGTH
66274	1/2”	2-1/2”	5,500 lb
66275	5/8”	3”	8,800 lb



Universal Trailer Coupler Locks

Bent at the perfect angle for easy removal. Made from oil tempered spring wire. Clear zinc plated finish. Features a locking bar with 6 locking positions.

PART#	DESCRIPTION
65085	Light Duty.Fits 1-7/8", 2" and 2-5/16" Couplers.
65086	Heavy Duty . Fits 1-7/8", 2" and 2-5/16" Couplers.



Trailer Lock Kit

Spring loaded bolt can be locked in the open position. Zinc plated bolt housing and keeper. Turning lever allows the bolt to close under spring pressure.

PART#	DESCRIPTION	CONTENTS
65087	Keyed alike.	Light duty Universal Trailer Coupler Lock , Brass Coupler lock , Dual bent Pin Hitch lock (fits 5/8 and 1/2 receivers)

Pictures are not scale. Sizes are approximate. Specifications subject to change without notice.

Receiver Pull Pins

For securing ball mounts to receiver-type hitches. Supplied with vinyl coated grip EZ clip.



PART#	MATERIAL	DIAMETER	USABLE LENGTH
66267	Stainless Steel - Won't Rust!	1/2"	3"
66268	Stainless Steel - Won't Rust!	5/8"	3"
66269	Stainless Steel - Won't Rust!	5/8"	3-1/2"
66270	High carbon steel, zinc plated.	1/2"	3"
66270P	As 66270 above, carded.	1/2"	3"
66271	High carbon steel, zinc plated.	5/8"	3"
66271P	As 66271 above, carded.	5/8"	3"
66272	High carbon steel, zinc plated.	5/8"	3-1/2"

EZ-Clips

Bent at the perfect angle for easy removal. Made from oil tempered spring wire. Clear zinc plated finish.



PART#	DESCRIPTION	WIRE DIAMETER	PKG. QTY.
66265	Clear zinc plated finish.	0.148"	25
66266	Vinyl coated non-slip grip.	0.148"	10
96266	Vinyl coated non-slip grip.	0.148"	2 (Blister Pack)

Spring Latches

Spring loaded bolt can be locked in the open position. Zinc plated bolt housing and keeper. Turning lever allows the bolt to close under spring pressure.



PART#	PIN DIAMETER	HANDLE TYPE	BRACKET LENGTH	BRACKET WIDTH	OVERALL LENGTH	MOUNTING HOLE DIAMETER
23057	7/16"	Loop	3-3/8"	1-1/2"	7-1/4"	3/16"
23058	1/2"	4" L shape	3-1/8"	1-3/4"	5-1/2"	1/4"


Hitch Lock

Chrome plated, weather proof cap. Clamshell packaged.




PART#	TYPE	DIAMETER	USABLE LENGTH
65091	Sleeved Barrel	5/8" or 1/2"	2-1/2"
65092	Bent Pin	5/8"	3"
65093	Dual Bent Pin	5/8" & 1/2"	--

Pictures are not to scale. Sizes are approximate. Specifications subject to change without notice.

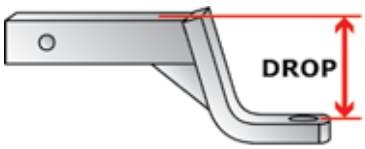


DROP

The distance from the top of the shank to the top of the ball platform



RISE

The distance from the top of the shank to the top of the ball platform



LENGTH

The distance from the center of the ball hole to the center of the pin hole



Class 1 Ball Mounts

Robotic welded, solid shank. Fits 1-1/4" Class 1 receiver tubes. Black powder coated finish.

PART#	*FINISH*	*CLASS*	*TW (LB)*	*GTW (LB)*	*HOLE*	*DROP*	*RISE*	*LENGTH*
11670	Black	1	200 lb	2,000 lb	3/4"	1-1/4"	5/8"	6-3/4"
11671	Black	1	200 lb	2,000 lb	3/4"	2-3/4"	2-1/8"	7"
11672	Black	1	200 lb	2,000 lb	3/4"	3-1/2"	3"	9-1/2"



Class 3-4 Ball Mounts

Robotic welded, hollow shank. Fits 2" receivers. Black powder coated & chrome finish.

PART#	*FINISH*	*CLASS*	*TW (LB)*	*GTW (LB)*	*HOLE*	*DROP*	*RISE*	*LENGTH*
11600	Black	3	500 lb	5,000 lb	1"	Straight	Straight	10-1/2"
11601	Black	4	600 lb	6,000 lb	1"	2"	3/4"	9"
11602	Black	4	600 lb	6,000 lb	1"	4"	3"	9-1/4"
11603	Black	4	600 lb	6,000 lb	1"	6"	5"	11"
11611	Chrome	4	600 lb	6,000 lb	1"	2"	3/4"	8"
11612	Chrome	4	600 lb	6,000 lb	1"	4"	3"	8-3/4"



Class 4 Forged Steel Ball Mounts

Solid one piece, forged ball mount. Fits 2" receivers. Black powder coated finish.

PART#	*FINISH*	*CLASS*	*TW (LB)*	*GTW (LB)*	*HOLE*	*DROP*	*RISE*	*LENGTH*
11586	Black	4	1,000 lb	10,000 lb	1-1/4"	2"	1"	9"
11587	Black	4	1,000 lb	10,000 lb	1-1/4"	4"	3"	9-1/2"
11588	Black	4	1,000 lb	10,000 lb	1-1/4"	6"	5"	11"
11660	Black	4	1,000 lb	10,000 lb	1"	2"	1"	9"
11661	Black	4	1,000 lb	10,000 lb	1"	4"	3"	9-1/2"
11662	Black	4	1,000 lb	10,000 lb	1"	6"	5"	11"

Pictures are not scale. Sizes are approximate. Specifications subject to change without notice.

Class 5 Forged Steel Ball Mounts

Solid one piece forged ball mount. Fits 2” receivers. Black powder coated finish.

PART#	FINISH	CLASS	TW (LB)	GTW (LB)	HOLE	DROP	RISE	LENGTH
11686	Black	5	1,200 lb	12,000 lb	1-1/4”	2”	1”	9”
11687	Black	5	1,200 lb	12,000 lb	1-1/4”	4”	3”	9-1/2”
11688	Black	5	1,200 lb	12,000 lb	1-1/4”	6”	5”	11”



Super Duty Steel Ball Mounts

Robotic welded, hollow shank. Fits 2-1/2” receivers. Black powder coated finish.

PART#	FINISH	CLASS	TW (LB)	GTW (LB)	HOLE	DROP	RISE	LENGTH
11690	Black	4	1,000 lb	10,000 lb	1-1/4”	3”	1-1/2”	9-3/4”
11691	Black	4	1,000 lb	10,000 lb	1-1/4”	5"	3-1/2"	10”
11692	Black	4	1,000 lb	10,000 lb	1-1/4”	8"	6-1/2"	10-1/2”



Forged Aluminum Ball Mounts - Solid Shank

Solid high strength forged aluminum shank. Fits 2” receivers.

PART#	FINISH	CLASS	TW (LB)	GTW (LB)	HOLE	DROP	RISE	LENGTH
11585	Aluminum	4	800 lb	8,000 lb	1”	6”	5”	10-3/4”



Ball Mount Kits

Includes ball mount, welded trailer ball and pull pin. Fits 2” receivers.

PART#	FINISH	CLASS	BALL	TW (LB)	GTW (LB)	DROP	RISE	LENGTH
11590	Black	4	1-7/8”	500 lb	5,000 lb	2”	1”	8-1/4”
11591	Black	4	2”	600 lb	6,000 lb	2”	1”	8-1/4”
11592	Black	4	2-5/16”	600 lb	6,000 lb	2”	1”	8-1/4”
11641	Chrome	4	2”	600 lb	6,000 lb	2”	1”	8-1/4”



ATV Ball Mount Kit

2” receiver and ball mount. Bolts to frame with 3/4” bolt and lock nuts (supplied). Ball mount is removable with pull pin and clip (supplied). Welded loop for attaching tow straps or shackles.

PART#	FINISH	TW (LB)	GTW (LB)	HOLES
11655	Black	500 lb	3,500 lb	1” & 3/4”



Pictures are not to scale. Sizes are approximate. Specifications subject to change without notice.

MULTIPLE BALL MOUNTS - WELDED BALLS
Solid round shank with welded balls. Fits standard 2" square receivers.
No need to remove when changing - ***just pull the pin and turn!***



Round Shank - Triple

Solid round shank with welded balls. Fits standard 2" square receivers.
No need to remove when changing - just pull the pin and turn!

PART#	FINISH	CLASS	BALL	TW (LB)	GTW (LB)	DROP	RISE	LENGTH
11648	Black	3-4	1-7/8" 2" 2-5/16"	350 lb 600 lb 1000 lb	3500 lb 6,000 lb 10,000 lb	Straight	Straight	7-1/2"



Round Shank - Reversible

Solid round shank with welded balls. Fits standard 2" square receivers. No need to remove when changing - just pull the pin and turn!

PART#	FINISH	CLASS	BALL	TW (LB)	GTW (LB)	DROP	RISE	LENGTH
11647	Black	3	2" 2-5/16"	600 lb 1,000 lb	6000 lb 10,000 lb	Straight	Straight	7-1/2"



11604

Square Straight Shank - Reversible

Straight solid shank with welded balls. Fits 2" receivers.

PART#	FINISH	CLASS	BALL	TW (LB)	GTW (LB)	DROP	RISE	LENGTH
11604	Black	3-4	1-7/8" 2"	350 lb 600 lb	3500 lb 6,000 lb	Straight	Straight	7-1/4"
11605	Black	3-4	2" 2-5/16"	600 lb 1,000 lb	6000 lb 10,000 lb	Straight	Straight	7-1/4"



11644

Square Drop Shank - Reversible

Drop solid shank with welded balls. Fits 2" receivers.

PART#	FINISH	CLASS	BALL	TW (LB)	GTW (LB)	DROP	RISE	LENGTH
11644	Black	3	1-7/8" 2"	350 lb 600 lb	3500 lb 6,000 lb	2"	3/4"	8"
11645	Black	3	2" 2-5/16"	600 lb 1,000 lb	6000 lb 10,000 lb	2"	3/4"	7-1/4"

Pictures are not scale. Sizes are approximate. Specifications subject to change without notice.

Square Shank - Triple Ball Size

Fits 2” receivers, 5/8” hole size.

PART#	DESCRIPTION	FINISH	CLASS	BALL	TW (LB)	GTW (LB)	LENGTH
11607	Solid square shank with welded balls	Black	3-4	1-7/8” 2" 2-5/16"	350 lb 600 lb 1,000 lb	3500 lb 6000 lb 10,000 lb	8” 8” 8"
11652	Hollow shank with welded balls	Black	3-4	1-7/8” 2” 2-5/16”	200 lb 600 lb 1,000 lb	2,000 lb 6,000 lb 10,000 lb	8” 8” 8"


11652

Square Shank - Triple Ball Size with Tow Hook

Fits 2” receivers, 5/8” hole size.

PART#	DESCRIPTION	FINISH	CLASS	BALL	TW (LB)	GTW (LB)	LENGTH
11606	Solid square shank with welded balls & tow hook	Black	3-4	1-7/8” 2" 2-5/16"	350 lb 600 lb 1,000 lb	3,500 lb 6,000 lb 10,000 lb	8” 8” 8"


11606

Clevis Ball Mount

Hollow shank. Can be used as a standard ball mount.

PART#	FINISH	TW (LB)	GTW (LB)	TUBE	HOLE	LENGTH
11579	Black	600 lb	6,000 lb	Straight	1”	10”



Shackle (Tow Strap) Ball Mount

For use with recovery straps on pickups and ATVs. Black powder coated finish with zinc plated shackle. Fits 2” receivers.

PART#	FINISH	TW (LB)	GTW (LB)	OVERALL LENGTH	SHANK TYPE	SHACKLE DIAMETER
11693	Black	600 lb	6,000 lb	9-3/8”	Hollow	5/8”
11694	Black	1000 lb	10,000 lb	10"	Solid	3/4”



Adjustable Triple Ball Mounts

High grade solid steel for maximum strength. 3-pin design for easy adjustment (pins & clips included). Straight to 6-1/2” maximum drop/rise. 2” x 2” solid shank. Meets S.A.E. J684/V-5.

PART#	CLASS	BALL	TW (LB)	GTW (LB)
11650	3-4	1-7/8” 2" 2-5/16"	600 lb 1,000 lb 1,000 lb	6,000 lb 10,000 lb 10,000 lb



Adjustable Ball Mounts (Single Platform)

Black powder coated finish. Perfect for use on tow trailers of various coupler heights. Can be used in the rise or drop position as needed. Fits 2” receiver. Trailer hole size is 1”. Pull pin & clip are included.

PART#	FINISH	CLASS	TW (LB)	GTW (LB)	LENGTH	ADJUSTMENT
11595	Black	3	600 lb	6,000 lb	12-1/2”	2” to 7-3/4” drop, up to 6-1/2” rise




Pictures are not to scale. Sizes are approximate. Specifications subject to change without notice.

TOW PRO TOWING AND ACCESSORIES

ADJUSTABLE BALL MOUNTS


Black powder coated finish. Perfect for use on tow trailers of various coupler heights.
Can be used in the rise or drop position as needed. Two pieces, comes with pull pins & clips.



Square Drop Shank - Reversible

Drop solid shank with welded balls. Fits 2" receivers.


PART#	FINISH	TW (LB)	GTW (LB)	LENGTH (A)	DROP (B)	HEIGHT (C)
11561	Black	500 lb	5,000 lb	12-1/4"	5"- 9-1/2"	3-3/4"- 8-1/4"



Adjustable Double Ball Mount

Solid steel with 5/8" pin hole. 1-7/8" ball supports up to 2,000 lb; 2" ball supports up to 5,000 lb.


PART#	RECEIVER OPENING	LENGTH (A)	DROP (B)	HEIGHT (C)
11562	2"x2"	13-1/2"	4-4/5"- 10-4/5"	3-3/5" - 9-3/5"



Multi-Use Ball Mount

Tow and carry hitch mounted accessories at the same time.

PART#	FINISH	TW (LB)	GTW (LB)	LENGTH (A)	DROP (B)	HEIGHT (C)
11560	Black	500 lb	5,000 lb	12-1/4"	2-1/4"	5-4/5"



Dual Hitch Extension

Fits 2" receivers.

PART#	FINISH	TW (LB)	GTW (LB)	LENGTH (A)	HEIGHT (B)
11780	Black	400 lb	4,000 lb	12-1/4"	6-1/4"



Step Bumper Receiver

Fits 2" receivers.

PART#	FINISH	TW (LB)	GTW (LB)
11782	Black	500 lb	5,000 lb



Hitch Box Extension

Service step. 2" extension only.

PART#	DESCRIPTION	TW (LB)	GTW (LB)
11784	14" x 7" stepping area	400 lb	4,000 lb

Pictures are not scale. Sizes are approximate. Specifications subject to change without notice.

Hitch Adapters

Ideal for cargo carriers and bike carriers. Black powder coated finish.
Not to be used for towing.

PART#	DESCRIPTION
11785	Decrease receiver opening from 2-1/2" to 2", 5/8" pin, 5" in length.
11786	Decrease receiver opening from 2" to 1-1/4", 5/8" pin hole, 3-1/2" length.
11787	Increase receiver opening from 1-1/4" to 2", GTW 3500 lb
11788	Decrease receiver opening from 2" to 1-1/4", GTW 3500 lb
11789	8-1/2" Length, fits 2" receivers.



Receiver Tubes

Powder coated black finish. Welded.
Fits 2" receivers.

PART#	LENGTH
11770	6"
11771	12"
11772	18"
11773	24"
11774	36"
11775	48"



PINTLE HOOKS

Solid forged steel construction. Black enamel painted finish. 4-1/4" x 3-1/4" base plate. All bolts are made from heat treated allow steel.

PART#	CAPACITY	TW (LB)	GTW (LB)
11618	5 Tons	2,000 lb	10,000 lb
11620	10 Tons	4,000 lb	20,000 lb
11619	15 Tons	6,000 lb	30,000 lb
11621	20 Tons	9,000 lb	40,000 lb
11622	30 Tons	14,000 lb	60,000 lb



Pintle Hooks - Solid Shank

Fits 2" receivers.

PART#	TW (LB)	HOOK CAP. (LB)
11718	2,000 lb	10,000 lb
11719	2,000 lb	20,000 lb
11720	2,000 lb	30,000 lb



Pictures are not to scale. Sizes are approximate. Specifications subject to change without notice.



Pintle Mounts

For 2” receivers. Converts receivers for use with pintle type trailers quickly and easily. Provides mounting for both ball and pintle hooks. Black powder coat finish.

PART#	DESCRIPTION	TW (LB)	GTW (LB)	# OF HOLES	POSITION (PAIRS)
11610	7-5/16” x 5”	1,000 lb	10,000 lb	8	4th
11630	12-1/2” x 5”	1,000 lb	10,000 lb	14	7th



Combination Pintle Hooks

PART#	BALL SIZE	BALL CAP.(LB)	TW (LB)	GTW (LB)	REPLACEMENT BALL PART #’S
11616	2”	7,000 lb	3,000 lb	16,000 lb	11632
11617	2-5/16”	12,000 lb	3,000 lb	16,000 lb	11633



Combination Pintle Hooks - 1 Piece, Solid Shank

Solid steel construction. Comes with lock pin on chain and 2” trailer ball. Fits 2” receivers.

PART#	BALL SIZE	BALL CAP.(LB)	TW (LB)	GTW (LB)	SHANK	REPLACEMENT BALL PART#’S
11715	1-7/8”	2,000 lb	1,200 lb	12,000 lb	2”	11631
11716	2”	7,000 lb	1,200 lb	12,000 lb	2”	11632
11717	2-5/16”	12,000 lb	1,200 lb	12,000 lb	2”	11633



Mount Fixed Lunette Ring

Forged steel with black powder coated finish.

PART#	DESCRIPTION	TOW RATING
11634	2-1/2” ring diameter, 3-1/4” shank length, 1-1/2” shank diameter	15,000 lb



Adjustable 3-Position Lunette Ring

Forged steel with black powder coated finish.

PART#	DESCRIPTION	TOW RATING
11635	Forged ring 6” outside diameter, 2-3/4” inside diameter, 3-5/8” outside bracket width, 3” inside bracket width, 1,800 lb. vertical load.	12,000 lb



4-Hole Mounting Lunette Ring

Forged steel with black powder coated finish.

PART#	DESCRIPTION	TOW RATING
11636	2-1/2” diameter ring with square 6” base plate, 5/8” diameter mounting holes, 4,000 lb. vertical load.	42,000 lb

Pictures are not scale. Sizes are approximate. Specifications subject to change without notice.

LED Magnetic Towing Light Kit

Ideal for situations requiring temporary lighting.

PART#	DESCRIPTION	CONTENTS
11978	LED Magnetic Towing Light Kit with 20 feet of wiring with 4-pole flat adapter.	Includes 2 round magnetic LED lights, mounting hardware and connectors.



RV, Marine & Utility LED Lighting Kit

Submersible up to 80" depth.

PART#	DESCRIPTION	CONTENTS
11980	LED Trailer Lighting Kit. Over 80" submersible, 4-pole flat connector.	Includes 2 rectangular LED lights, mounting hardware and connectors.



Deluxe Door Mount Towing Mirror

PART#	DIMENSIONS	DESCRIPTION:
17722	Mirror size: 220 mm W x 145 MM H (8-5/8" W x 5-3/4" H)	Frame extends from 330 mm to 470 mm (13" to 18-1/2")

- *Easy installation*
- *Suitable for towing trailers, campers, boats, etc.*
- *Mounts onto door*
- *Extra large stainless steel mirror head*
- *No-Mar flexible rubber straps protect vehicle finish and ensure snug, vibration free fit*
- *No tools required!*




NO TOOLS REQUIRED!



Rubber pad protects vehicle's finish

Pictures are not to scale. Sizes are approximate. Specifications subject to change without notice.





2 Way Flat Connector

PART#	DESCRIPTION
27002	2-pole flat connectors. 12” 18 ga. white & yellow wires.




27004



27006




27008



4 Pole Flat Connectors

PART#	DESCRIPTION
27004	4-pole flat wiring harness. 18 ga wire - 12” male, 48” female, 18” ground.
27006	4-pole flat wiring harness. 12” 18 ga wire.
27008	4-way flat wiring harness. 25 ft 3-wire bonded loop with ground wire. 18 ft male end, 5 ft female end. 5 ft brown extension wire included.





4 Pole Flat Loop Trailer Connector - Heavy Duty

PART#	DESCRIPTION
27010	4-pole flat loop. Heavy duty. 48” 18 ga. wires.






4 Pole Round Plug & Socket

PART#	DESCRIPTION
27015	Die cast, chrome plated housing. Trailer and Vehicle side.






5 Pole Flat Connectors

PART#	DESCRIPTION
27020	Male connector plug. Comes with 48” of 18 gauge wire.
27022	Female connector socket. Comes with 48” of 18 gauge wire.





5 Pole Flat Connector- Heavy Duty

PART#	DESCRIPTION
27024	5-pole heavy duty connector loop. 48” 18 ga. wires.

Pictures are not scale. Sizes are approximate. Specifications subject to change without notice.

6 Way Round Plug & Socket

PART#	DESCRIPTION
27030	6-way round plug & socket. Heavy duty die cast housing.
27034	6-pole round socket with cover, with heavy duty die cast housing, vehicle side.
27036	6-pole round plug. Heavy duty die cast housing, trailer side.



Mounting Bracket For 7 Way Trailer Connectors

PART#	DESCRIPTION
27040	Zinc plated.



7 Way Socket

PART#	DESCRIPTION
27042	7-way blade socket with cover. Zinc plated metal housing. Vehicle side.





7 Way Blade Plug

PART#	DESCRIPTION
27044	7-way blade blade plug. Zinc plated metal housing. Trailer side.





7 Way Plug And Socket

PART#	DESCRIPTION
27046	7-way blade. With cover, ABS housing with red reflector. Trailer and vehicle side.





7 Way Socket

PART#	DESCRIPTION
27048	7-way blade socket. Plastic housing with red reflector. Vehicle side.





7 Way Plug


PART#	DESCRIPTION
27050	7-way blade flat plug. Plastic housing. Trailer side.





7 Way Socket / 4-Way Plug Set


PART#	DESCRIPTION
27052	7-way blade socket with cover. 4-way flat plug & Direct wiring. Vehicle side.





Pictures are not to scale. Sizes are approximate. Specifications subject to change without notice.





7 Way Socket Led & 4-Way Plug With LEDs

PART#	DESCRIPTION
27054	7-way pre-wired blade socket with cover. 4-way flat plug. 6 LED indicator. Vehicle side.
27056	27054 plus Mounting Kit.





7 Way Plug - Heavy Duty

PART#	DESCRIPTION
27060	7-pole round plug. Heavy duty die cast housing. Trailer side.





7 Way Socket - Heavy Duty

PART#	DESCRIPTION
27062	7 pole round socket with cover. Vehicle side.





7 Way Plug

PART#	DESCRIPTION
27064	7-pole round plug. Nylon with fiberglass housing. Trailer side.





7 Way Socket

PART#	DESCRIPTION
27066	7-pole round socket with cover. Nylon with fiberglass housing. Vehicle side.






7 Way Socket - Heavy Duty

PART#	DESCRIPTION
27068	7-pole round heavy duty socket. 3 hole mounting.






6 Way Socket, 4 Way Plug With LEDs (Adapter)

PART#	DESCRIPTION
27075	#27070 Plus mounting kit.

Pictures are not scale. Sizes are approximate. Specifications subject to change without notice.

4 Way In-Line Adapter


PART#	DESCRIPTION
27076	Trailer Connector Set, 4-way in-line adapter with cover.





Trailer Connector Adapters

PART#	DESCRIPTION
27078	6-way round to 4-way flat.
27080	7-pole round to 4-way flat.
27082	7-way blade to 6-way round. Center pin auxiliary.
27084	7-way blade to 4-way flat.
27086	7-way blade plug to 6-way round socket, 5-way flat, and 4-way flat.
27088	7-pole blade plug to 7-pole round socket. Heavy duty.

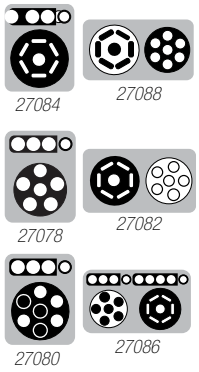



4 Way Flat Connector (Adapter)


PART#	DESCRIPTION	CONTENT
27090	Tail Light Adapter. 4 way 3 amp flat connector with cover.	Supplied with 18 gauge bonded wiring.





4 Way Flat Tester With LEDs


PART#	DESCRIPTION
27092	4-way flat tester with 3 LEDs indicator and ring.





4 Way And 5 Way Flat Tester With LEDs

PART#	DESCRIPTION
27093	4-way and 5-way flat tester with 4 LEDs indicator and cover.





7 Way Blade Tester With LEDs

PART#	DESCRIPTION
27096	7-way blade tester with 6 LEDs indicator.





Breakaway Switch With Lanyard

PART#	DESCRIPTION
27098	With 4 ft. of 16 gauge wire. Metal bracket included.



Pictures are not to scale. Sizes are approximate. Specifications subject to change without notice.




Power Jack

- *4000 lb Lifting Power!*
- *Tracks 10" in 60 seconds*
- *12 volt DC powered with manual crank over-ride*
- *Allows quick break-away from coupler*
- *Water resistant enclosed motor*
- *Low noise level during operation*
- *Fits 2-1/4" mounting holes*
- *25" total travel! (8" drop leg, 17" travel)*
- *9-3/4" bracket height*
- *Durable black powder coated finish*
- *Hardened steel gears*
- *LED light, easy night time hookups*
- *Oversize 5-1/2" diameter foot pad*
- *Weather sealed switch*
- *Built-in level*
- *Black plastic cover*
- *Power cord length: 6' of #10 gauge wire*
- *5 yr manufacturer warranty*

PART#	VERTICAL LOAD	TRAVEL	DROP LEG	TOTAL TRAVEL	EXTENDED HEIGHT
52700	4,000 lb	17"	8"	25"	34-3/4"

All specifications for jacks are in accordance with the ASABE S 485 standards









"Swing-Way" Jacks with Caster Wheels

Black powder coated finish. Perfect for use on tow trailers of various coupler heights. Heavy duty swivel mechanism swings and locks jack to transport position. Pull-type locking pin secures jack into load-bearing position. Supplied with bolt reinforced caster and mounting bracket. Fits tongues up to 3" x 5".

PART#	SUPPORT CAPACITY	MAXIMUM LIFT CAPACITY	CASTER WHEEL	LIFT	BRACKET HEIGHT	RETRACTED HEIGHT	EXTENDED HEIGHT
11466	1,600 lb	1,200 lb	6"	10"	12-3/4"	23-1/4"	33-1/4"
11477	2,000 lb	1,500 lb	8"	10"	12-3/4"	25-1/2"	35-1/2

All specifications for jacks are in accordance with the ASABE S 485 standards



Pictures are not scale. Sizes are approximate. Specifications subject to change without notice.

Top Wind with Wheel

PART#	SUPPORT CAPACITY	MAXIMUM LIFT CAPACITY	CASTER WHEEL	LIFT	BRACKET HEIGHT	RETRACTED HEIGHT	EXTENDED HEIGHT	HANDLE
11463	2,000 lb	1,200 lb	6”	15”	8-1/2”	20”	35”	Knob
No Caster	6,000 lb	5,000 lb	-	-	-	-	-	-



Side Wind with Wheel

Non-removable handle

PART#	SUPPORT CAPACITY	MAXIMUM LIFT CAPACITY	CASTER WHEEL	LIFT	BRACKET HEIGHT	RETRACTED HEIGHT	EXTENDED HEIGHT
11467	2,000 lb	1,200 lb	6”	15”	9-1/2”	23-1/2”	38-1/2”
No Caster	2,800 lb	2,000 lb	-	-	-	-	-



Top Wind without Base or Wheel

PART#	SUPPORT CAPACITY	MAXIMUM LIFT CAPACITY	LIFT	BRACKET HEIGHT	RETRACTED HEIGHT	EXTENDED HEIGHT
11492	6,000 lb	5,000 lb	15”	8-1/2”	20”	35”
11493	6,000 lb	5,000 lb	15”	10”	21”	36”
11492-1	Base for 11492, 11493 and 11484					



Side Wind without Wheel

PART#	SUPPORT CAPACITY	MAXIMUM LIFT CAPACITY	LIFT	BRACKET HEIGHT	RETRACTED HEIGHT	EXTENDED HEIGHT
11484	2,800 lb	2,000 lb	15”	9”	24”	39”



Square Tube A-Frame Jack

Outer tube: 57mm x 50mm. Base: 96mm x 196mm. Weight: 9.2 kg.

PART#	SUPPORT CAPACITY	MAXIMUM LIFT CAPACITY	TYPE	TRAVEL	BRACKET HEIGHT	RETRACTED HEIGHT	EXTENDED HEIGHT
11486	6,500 lb	5,000 lb	Side Wind	15”+ 13”	7-1/2”	24-1/2”	37-1/2”



Pictures are not to scale. Sizes are approximate. Specifications subject to change without notice.



Round Tube Mount Jacks, Top Wind

Robust internal gear mechanism and heavy duty rolled threads for smooth operation and dependability. 4-position mounting tube, lock-pin and handle. Black enamel painted finish.

PART#	SUPPORT CAPACITY	MAXIMUM LIFT CAPACITY	LIFT	BRACKET HEIGHT	BRACKET TYPE	RETRACTED HEIGHT	EXTENDED HEIGHT
11468	6,500 lb	5,000 lb	10”	10”	Pipe	15”	25”
11469	6,500 lb	5,000 lb	15”	15”	Pipe	20-1/4”	35-1/4”



Round Tube Swivel Bracket Mount Jacks, Top Wind

Robust internal gear mechanism and heavy duty rolled threads for smooth operation and dependability. 4-position mounting tube, lock-pin and handle. Black enamel painted finish.

PART#	SUPPORT CAPACITY	MAXIMUM LIFT CAPACITY	LIFT	BRACKET HEIGHT	BRACKET TYPE	RETRACTED HEIGHT	EXTENDED HEIGHT
11470	2,800 lb	2,000 lb	10”	8-1/2”	Flange	15”	25”
11471	2,800 lb	2,000 lb	15”	13-1/4”	Flange	20”	35”



Side Wind, Round Tube Mount (7-1/2” x 4” Base Plate)

Robust internal gear mechanism and heavy duty rolled threads for smooth operation and dependability. 4-position mounting tube, lock-pin and handle. Black enamel painted finish.

PART#	SUPPORT CAPACITY	MAXIMUM LIFT CAPACITY	LIFT	BRACKET HEIGHT	BRACKET TYPE	RETRACTED HEIGHT	EXTENDED HEIGHT
11472	6,500 lb.	5,000 lb	15”	14”	Pipe	22”	37”
11473	6,500 lb	5,000 lb	10”	9”	Pipe	16-1/2”	26-1/2”



Side Wind, Round Tube Mount (8” x 6” Base Plate)

Robust internal gear mechanism and heavy duty rolled threads for smooth operation and dependability. 4-position mounting tube, lock-pin and handle. Black enamel painted finish.

PART#	SUPPORT CAPACITY	MAXIMUM LIFT CAPACITY	LIFT	BRACKET HEIGHT	BRACKET TYPE	RETRACTED HEIGHT	EXTENDED HEIGHT
11474	8,400 lb	7,000 lb	10”	9”	Pipe	17”	27”
11475	8,400 lb	7,000 lb	15”	14-1/4”	Pipe	22-1/2”	37-1/2”
11479	6,500 lb	5,000 lb	15”	15”	Pipe	22-1/2”	37-1/2”

Pictures are not scale. Sizes are approximate. Specifications subject to change without notice.

Top Wind, Square Tube Mount

Robust internal gear mechanism & heavy duty rolled threads for smooth operation. Equipped with removable cover, grease fittings,4-position mounting tube and lock-pin. Black enamel painted finish.

PART#	SUPPORT CAPACITY	MAXIMUM LIFT CAPACITY	LIFT	BRACKET HEIGHT	BRACKET TYPE	RETRACTED HEIGHT	EXTENDED HEIGHT
11520	2,800 lb	2,000 lb	10”	10”	Pipe	19”	29”
11525	2,800 lb	2,000 lb	15”	10”	Pipe	23”	38”
11526	2,800 lb	2,000 lb	15”	15”	Pipe	21”	36”
11535	6,000 lb	5,000 lb	15”	15-3/4”	Pipe	22”	37


11520

Side Wind, Square Tube Mount

Robust internal gear mechanism & heavy duty rolled threads for smooth operation. Equipped with removable cover, grease fittings,4-position mounting tube and lock-pin. Black enamel painted finish.

PART#	SUPPORT CAPACITY	MAXIMUM LIFT CAPACITY	LIFT	BRACKET HEIGHT	BRACKET TYPE	RETRACTED HEIGHT	EXTENDED HEIGHT
11510	2,800 lb	2,000 lb	10”	9”	Pipe	19-1/2”	29-1/2”
11515	2,800 lb	2,000 lb	15”	15”	Pipe	23-1/2”	38-1/2”
11540	6,500 lb	6,000 lb	10”	9”	Pipe	17”	27”


11510

Square Tube Trailer Jack

Heavy duty 2-1/4” square tube “weld-on” construction designed for reliability and durability.Features grease fitting for lubrication of mechanism. Black enamel painted finish.

PART#	SUPPORT CAPACITY	MAXIMUM LIFT CAPACITY	LIFT	TYPE	RETRACTED HEIGHT	EXTENDED HEIGHT
11480	6,500 lb	5,000 lb	15”	Top Wind	22”	37”



Square Tube Trailer Jack

Robust 2-1/2” square tube. Drop leg adjusts 13” in addition to lift. Features grease fitting for lubrication of mechanism. Black enamel painted finish.

PART#	SUPPORT CAPACITY	MAXIMUM LIFT CAPACITY	TYPE	LIFT	TOTAL TRAVEL	RETRACTED HEIGHT	EXTENDED HEIGHT
11545	6,500 lb	6,000 lb	Side Wind	16”+13”	31”	24-1/2”	53-1/2”



Square Tube “Drop Legs” Jack

Robust 2-1/2” square tube “weld-on” construction. Drop leg adjusts 13” in addition to lift. Features grease fitting for lubrication of mechanism. Black enamel painted finish.

PART#	SUPPORT CAPACITY	MAXIMUM LIFT CAPACITY	TYPE	LIFT	TOTAL TRAVEL	RETRACTED HEIGHT	EXTENDED HEIGHT
11487	8,000 lb	7,000 lb	Top Wind	15” + 13”	28”	22”	50”
11488	8,000 lb	7,000 lb	Side Wind	15” + 13”	28”	24-1/2”	52-1/2”


11487

Pictures are not to scale. Sizes are approximate. Specifications subject to change without notice.



Square Tube "Drop Legs" Jacks - Heavy Duty

Heavy duty 4" square tube "weld-on" construction. Drop leg has 5 position holes and adjusts 13" in addition to lift. Features grease fittings for lubrication of mechanism. Black finish. Both units have a lift of 12-1/2".

PART#	SUPPORT CAPACITY	MAXIMUM LIFT CAPACITY	TYPE	TOTAL TRAVEL	DROP LEG PIN LOCATION	RETRACTED HEIGHT	EXTENDED HEIGHT
11490	12,000 lb	10,000 lb	Side Wind	25-1/2"	Side	28-1/2"	54"
11495	12,000 lb	10,000 lb	Top Wind	25-1/2"	--	23-1/2"	49"



Square Tube Jack - Heavy Duty

Heavy duty 4" square tube "weld-on" construction. Features grease fittings for lubrication of mechanism. Black finish. No drop leg.

PART#	SUPPORT CAPACITY	MAXIMUM LIFT CAPACITY	TYPE	LIFT	RETRACTED HEIGHT	EXTENDED HEIGHT
11494	12,000 lb	10,000 lb	Side Wind	12-1/2"	28"	40-1/2"



Levelling Scissor Jacks

Used for stabilizing and levelling 5th wheels and travel trailers. Sturdy steel construction. Designed for today's larger and heavier units. Black finish. Permanently mounted and conveniently concealed when not in use. Easy to install. Comes with wrench.

PART#	SUPPORT CAPACITY	MAXIMUM LIFT CAPACITY
11891	5,000 lb	4" to 24"



Stabilizer Jack

Used for stabilizing travel trailers, camper trailers and boat trailers. 4" x 3-3/8" base plate.

PART#	LIFT CAPACITY	RETRACTED HEIGHT	EXTENDED HEIGHT
11895	1,000 lb	11.5"	18"

Pictures are not scale. Sizes are approximate. Specifications subject to change without notice.

Jack Replacement Parts And Accessories

PART#	DESCRIPTION
11477-1	Plastic cap - Fits Jack #11477
11488-1	Replacement cap - Fits Jack #11488
11491	Side Wind Jack Handle - Fits Jack #11490
11500	Mounting Tube, External, Large - 2-1/2" Inside Diameter
11501	Mounting Tube, Internal, Small - 2" Outside Diameter
11502	Top Wind Handle
11505	Side Wind Handle
11509	Bushing for Jack Handle
11513	Weld-On Mounting Bracket
66469	Quick Pin for Implement Jacks - 5/8" Pin Diameter, 3-1/8" Usable Length


11509


11477-1


11488-1


11491 11502, 11505


11507 11500, 11501,11513

Fifth Wheel King Pin Stabilizer

Stabilizes motion of unhitched trailer or RV. Threaded hitch cap allows for height adjustment. Includes chain with inserts. Folds for storage. Durable steel construction.
King Pin height adjusts from 35" to 55".

PART#	SUPPORT CAPACITY	FOOTPLATE DIMENSIONS	WEIGHT
11794	5,000 lb	5" x 5-1/2"	23 lb



Trailer Wheels - High Speed

Eight-spoke rim, powder-coated for increased durability and long lasting finish. Yellow River Tires feature double steel belting and full nylon plies for increased strength and product life.

PART#	WHEEL SIZE	TIRE SIZE	BOLT PATTERN	PILOT DIAMETER	CAPACITY	LOAD RANGE
80120	12" x 4"	4.8" x 12"	4	2.83"	585 lb	C
80124	12" x 4"	5.3" x 12"	5	2.83"	1,047 lb	C
80128	13" x 4-1/2"	ST175/80 D13	5	3.19"	1,477 lb	D
80130	14" x 5-1/2"	ST205/75 D14	5	3.19"	1,764 lb	C
80132	15" x 5 -1/2"	ST205/75 D15	5	3.19"	1820 lb	C


80124

Mud Flaps

Sold separately. Each made of heavy rubber.

PART#	SIZE	THICKNESS	MOUNTING HEAD
11981	24" x 24"	1/4"	5/16"
11982	24" x 30"	1/4"	5/16"
11991	24" x 24"	3/8"	7/16"
11992	24" x 30"	7/16"	7/16"
11993	24" x 36"	7/16"	7/16"



Pictures are not to scale. Sizes are approximate. Specifications subject to change without notice.



Wheel Locks

Adjustable slide-lock for wheels. Fits multiple tire sizes. Weather proof locks with 2 keys.

PART#	DESCRIPTION	PACKAGING
65088	**Heavy Duty**. Fits 7" to 11" width tires	Double blister



PART#	DESCRIPTION	PACKAGING
65089	**Super Heavy Duty**. Fits 7" to 11" width tires	Colour box



PART#	DESCRIPTION	PACKAGING
65090	**Extreme Heavy Duty**. Fits 13" to 16" Rims. Fits tires up to 28".Diameter X 9" width	Colour box



11984 11985

Wheel Chocks

Rubber wheel chock for trailers, cars or other small vehecles. Non-slip surface provides superior traction.

PART#	SIZE
11984	7-1/2" x 6" x 3-3/4"
11985	10-5/8" x 7" x 4-1/2"



Wheel Chocks

Made from rubber compound with reinforced nylon fiber. Ideal for trailers and heavy loaded vehicles. Eyebolt for easy handling.

PART#	SIZE
11986	8" x 6" x 10"



Wheel Chocks

Yellow plastic wheel chock. Comes packaged in colour box. 2 wheel chocks per box.

PART#	SIZE
11988	8" x 5" x 4-1/4"



17720



17740

Manual Holders

Molded from high density polypropylene, weather and impact resistant. Protects documents from damage. Mounts onto machines for easy access. O-Ring sealed. Screw top lid.

PART#	DESCRIPTION
17720	Plastic Holder 2" diameter x 12-1/2" long
17730	Plastic Holder 3-1/4" diameter x 12-1/2" long
17731	Tether for plastic holder 17720 and 17730
17740	Aluminum Holder 1.5" diameter x 9" long
17740-1	Rubber cap replacement for 17740

Pictures are not scale. Sizes are approximate. Specifications subject to change without notice.