Extension Cord Cable

Extension Cord Cable – Neoprene Jacketed


Extra flexible type SJOW jacket cable for use as power supply for machine tools, drills and general shop use where subjected to hard usage in a damp or dry location. Oil and flame retardant. CSA and UL approved. For applications up to 300 Volts. Temperature rating: -40°C to 90°C (-40°F to 194°F)

2 Conductor

Gauge/Conductors	Stranding	Outside Diameter	250FT (76.2m)
14/2 (Black/White)	41 x .010"	.340"	769034

3 Conductor

Gauge/Conductors	Stranding	Outside Diameter	250FT (76.2m)	
18/3 (Black/Green/White)	16 x .010"	.305"	769039	
16/3 (Black/Green/White)	26 x .010"	.330"	769033	
14/3 (Black/Green/White)	41 x .010"	.365"	769035	
12/3 (Black/Green/White)	65 x .010"	.433"	*769036	*NEW

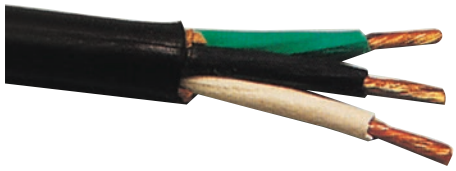


Neoprene Jacketed Extension Cable

See page 95 for cord band (ladder) cable ties…great for use with extension cords.

Replacement Socket and Plug

Repair or fabricate your own extension cords – 3 conductor, 110 Volts.

Type	1 PC/PK	10 PCS/PK
Male Plug	769758	769758B
Female Socket	769759	769759B



Socket and Plug

Extension Cord Assemblies – Cold Weather

*NEW

- SJEOW • Blue Jacketed • 15A Rated • Contractor Grade • Single Tap • Grounded Outlet
- Water Resistant • Lighted Receptacle • Temperature rating: -51°C (-60°F) to 105°C (221°F)
- Flexible to -51°C (-60°F) • Ready to use

Cord Gauge	Length	Part#	
14/3	25FT	*769753	*NEW
14/3	50FT	*769754	*NEW
12/3	25FT	*769755	*NEW
12/3	50FT	*769756	*NEW



*769753 / *769754



*769755 / *769756





Wire Protector Floor Ramp

769834 Easily protects wire cable/extension cords that are on the floor. Prevents people from tripping over wires. Available in a grey 6 foot piece. Dimensions of floor ramp: 3" (7.55 cm) wide, 5/8" (1.58 cm) high, 6' long. Inside, the dimensions are: 3/4" (1.9 cm) wide, 1/2" (127 cm) high. This ramp is designed to accommodate virtually all gauges of automotive cable.



769834
Wire Protection
Floor Ramp